

## วิธีตรวจสอบรายการอุปกรณ์ที่เชื่อมต่อกับ HUAWEI HG8247W5

1. พิมพ์ 192.168.1.1 แล้วกด Enter


- User Name = admin
- Password = ใส่รหัสผ่านที่มีการตั้งไว้ตั้งแต่ตอนตั้งค่าครั้งแรก
- จากนั้นกด Log In




## 2. สามารถตรวจสอบได้ 2 แบบ ดังนี้

### ตรวจสอบทั้ง LAN และ Wi-Fi

#### 1. ที่หน้า Status สามารถดูได้ที่หัวข้อ Wi-Fi Devices และ Wired Devices

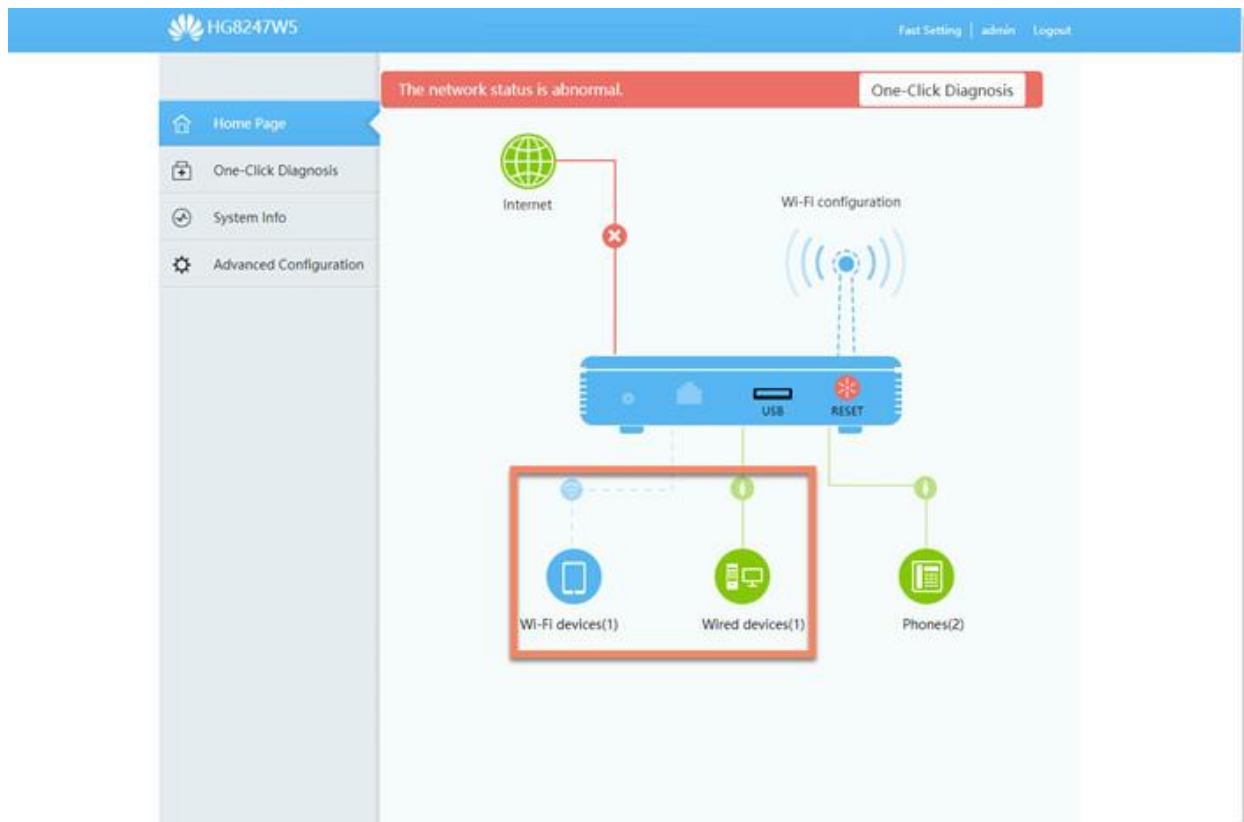

#### 2. ตัวอย่างข้อมูล Wi-Fi Devices

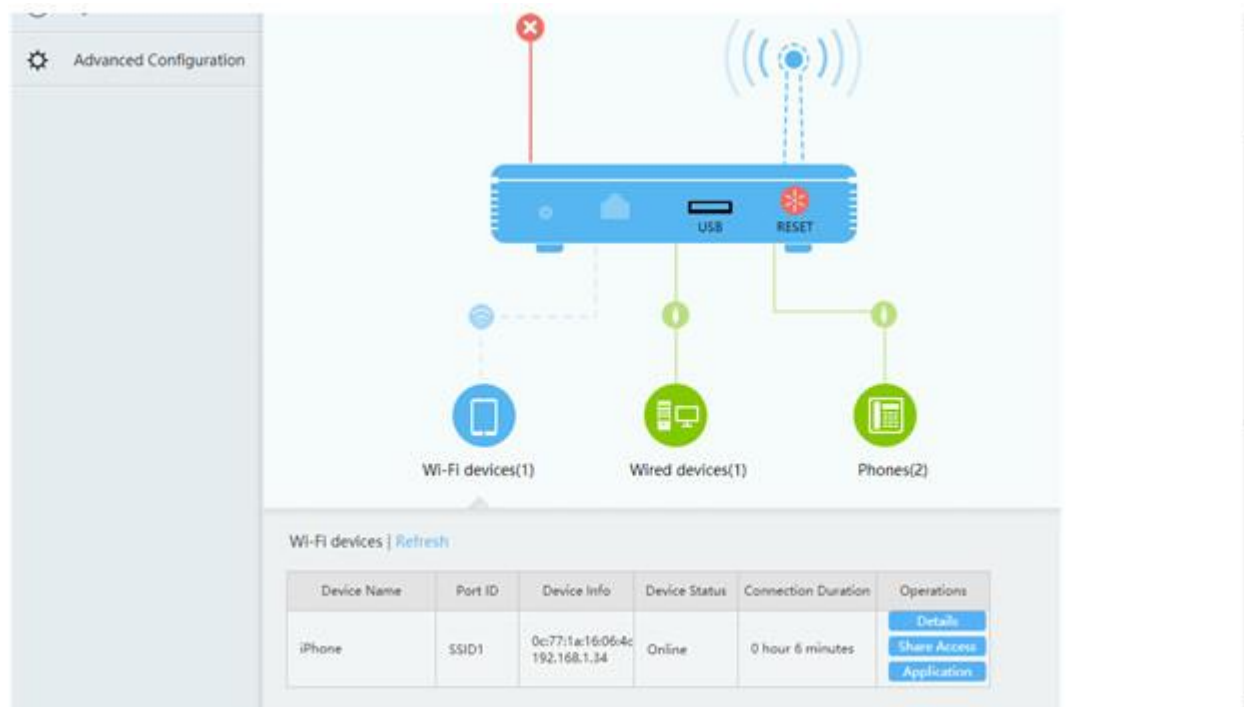


### 3. ตัวอย่างข้อมูล Wired Devices

The screenshot shows a router's configuration interface. At the top, a diagram illustrates the router's connectivity: a red 'X' indicates a disconnected antenna, a blue signal icon shows Wi-Fi status, and a green signal icon shows wired device status. Below the diagram, three categories are listed: 'Wi-Fi devices(1)', 'Wired devices(1)', and 'Phones(2)'. The 'Wired devices' section is expanded to show a table with the following data:


| Device Name  | Port ID | Device Info                       | Device Status | Connection Duration | Operations   |
|--------------|---------|-----------------------------------|---------------|---------------------|--|
| CMTY-KOMSAN7 | LAN1    | 9c:5a:44:56:e3:52<br>192.168.1.33 | Online        | 0 hour 24 minutes   | <a href="#">Details</a><br><a href="#">Share Access</a><br><a href="#">Application</a> |

## ตรวจสอบอุปกรณ์ที่ต่อเข้ามาแบบ Wi-Fi อย่างเดียว

### 1. ที่หน้า Status เลือก System Info

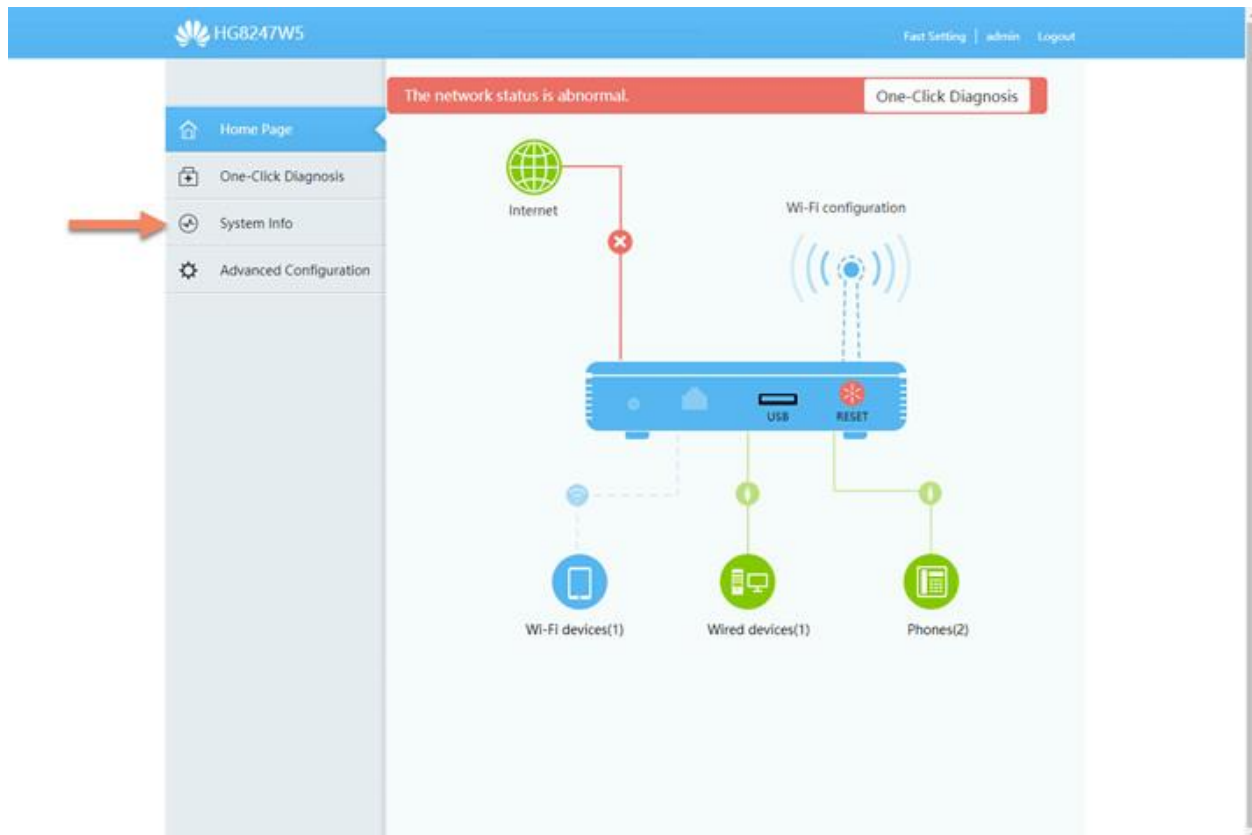

### 2. เลือก WLAN Information > เลือกความถี่ที่ต้องการตรวจสอบ > เลื่อนหน้าจอลงด้านล่าง

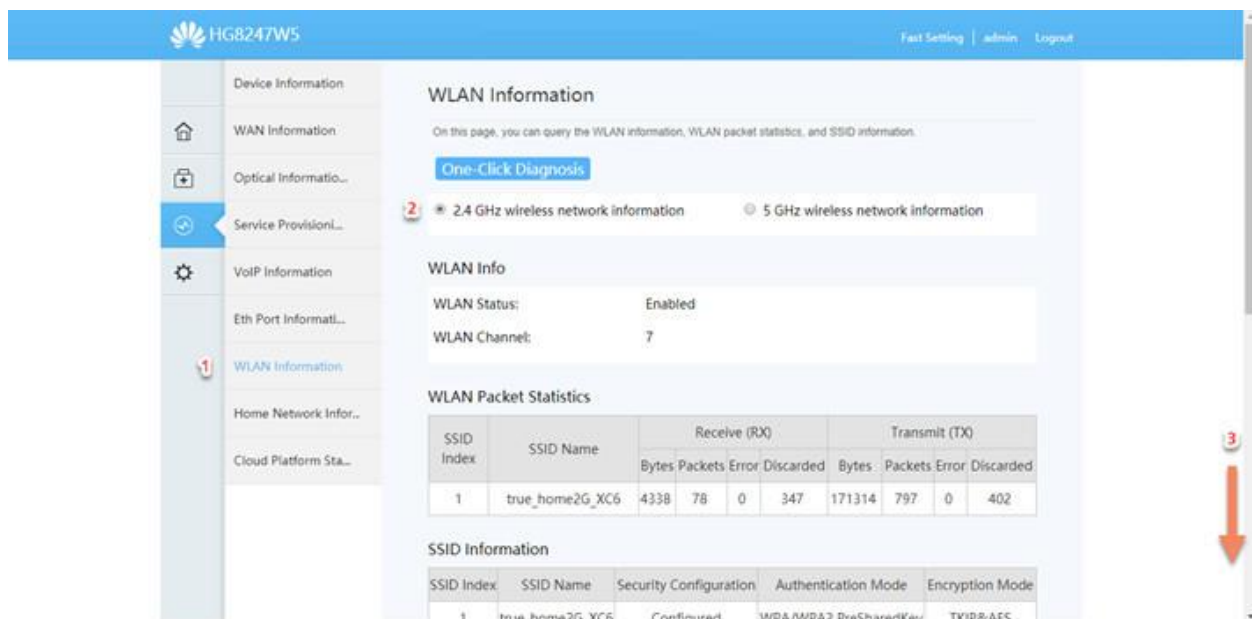

### 3. ที่ STA Information เลือก Query

Cloud Platform Sta...

| Index | SSID Name       | Bytes | Packets | Error | Discarded | Bytes  | Packets | Error | Discarded |
|-------|-----------------|-------|---------|-------|-----------|--------|---------|-------|-----------|
| 1     | true_home2G_XC6 | 4338  | 78      | 0     | 347       | 171314 | 797     | 0     | 402       |

SSID Information

| SSID Index | SSID Name       | Security Configuration | Authentication Mode   | Encryption Mode |
|------------|-----------------|------------------------|-----------------------|-----------------|
| 1          | true_home2G_XC6 | Configured             | WPA/WPA2 PreSharedKey | TKIP&AES        |

STA Information

| MAC Address | SSID Name | Connection Duration (s) | Sending Rate (Mbit/s) | Receiving Rate (Mbit/s) | Signal Strength (dBm) | Noise (dBm) | Signal-to-Noise Ratio (dB) | Signal Quality (dBm) | Antenna Num | 11k | 11v | Dual |
|-------------|-----------|-------------------------|-----------------------|-------------------------|-----------------------|-------------|----------------------------|----------------------|-------------|-----|-----|------|
|             |           |                         |                       |                         |                       |             |                            |                      |             |     |     |      |

Neighbor AP Information

Note: Querying neighbor AP information may disconnect all STA connections.

| SSID Name | MAC Address | Network Type | Channel | Signal Strength (dBm) | Noise (dBm) | DTIM Interval | Beacon Period (ms) | Authentication Mode | Working Mode | Max. Rate (Mbit/s) |
|-----------|-------------|--------------|---------|-----------------------|-------------|---------------|--------------------|---------------------|--------------|--------------------|
|           |             |              |         |                       |             |               |                    |                     |              |                    |

### 4. ระบบจะแสดง List อุปกรณ์ที่เชื่อมต่อเข้ามาแบบ Wi-Fi

Cloud Platform Sta...

| Index | SSID Name       | Bytes | Packets | Error | Discarded | Bytes  | Packets | Error | Discarded |
|-------|-----------------|-------|---------|-------|-----------|--------|---------|-------|-----------|
| 1     | true_home2G_XC6 | 4338  | 78      | 0     | 347       | 171314 | 797     | 0     | 402       |

SSID Information

| SSID Index | SSID Name       | Security Configuration | Authentication Mode   | Encryption Mode |
|------------|-----------------|------------------------|-----------------------|-----------------|
| 1          | true_home2G_XC6 | Configured             | WPA/WPA2 PreSharedKey | TKIP&AES        |

STA Information

Number of STAs: 1

| MAC Address       | SSID Name       | Connection Duration (s) | Sending Rate (Mbit/s) | Receiving Rate (Mbit/s) | Signal Strength (dBm) | Noise (dBm) | Signal-to-Noise Ratio (dB) | Signal Quality (dBm) |
|-------------------|-----------------|-------------------------|-----------------------|-------------------------|-----------------------|-------------|----------------------------|----------------------|
| 0C:77:1A:16:06:4C | true_home2G_XC6 | 882                     | 65                    | 65                      | -28(Stronger)         | -86         | -58                        |                      |

Neighbor AP Information

Note: Querying neighbor AP information may disconnect all STA connections.

| SSID Name | MAC Address | Network Type | Channel | Signal Strength (dBm) | Noise (dBm) | DTIM Interval | Beacon Period (ms) | Authentication Mode | Working Mode | Max. Rate (Mbit/s) |
|-----------|-------------|--------------|---------|-----------------------|-------------|---------------|--------------------|---------------------|--------------|--------------------|
|           |             |              |         |                       |             |               |                    |                     |              |                    |