


## How to set up Port Filtering on Cisco EPC 2325

1. Open Browser and type <http://192.168.0.1> in the address bar




2. Click Setup

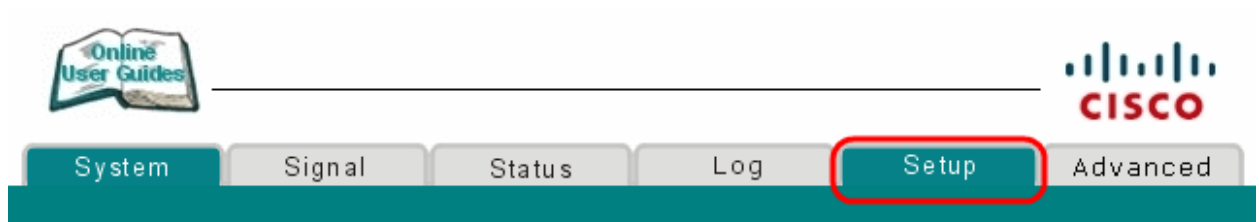

3. Enter **admin** for Username and **W2402** for Password. The "W" must be upper casing then click OK

Note: if typing <http://192.168.0.1> doesn't work, try entering 192.168.1.1 and entering "admin" for Username and "password" for password

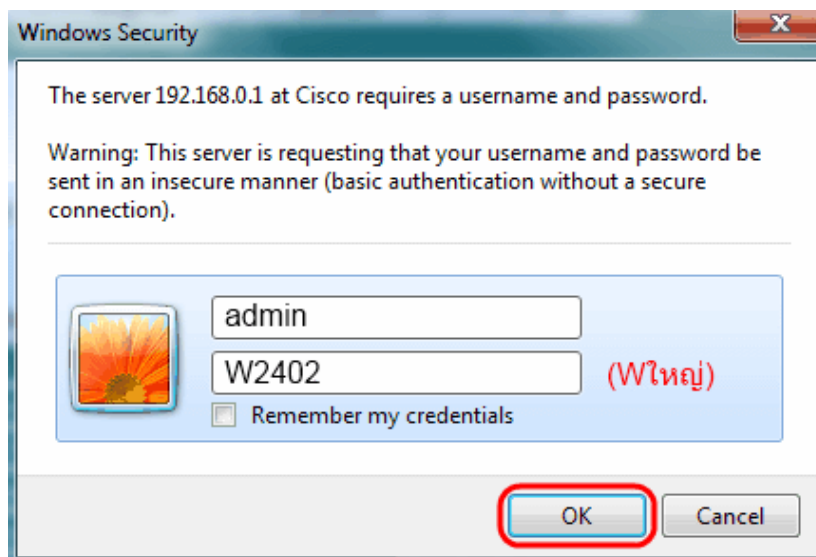

4. Go to **Advanced Settings > Port Filtering**




5. At Setup-Port Filtering page,  
Specify **Start Port**, **End Port** and select **Protocol** (Default = Both) and then  
click **Enable**

**Setup**

**Advanced Settings - Port Filtering**

This page allows you to configure TCP and UDP port filters.

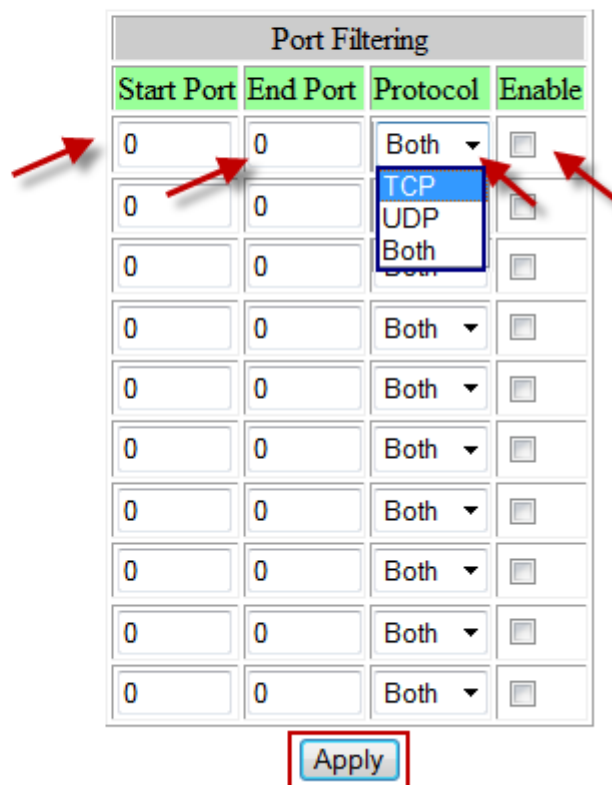

6. Click Apply