


Check connected Device list for HUAWEI HG8247W5

1. Type 192.168.1.1 and press Enter


- User Name = admin
- Password = enter letters shown in Default Password
- Press Log In

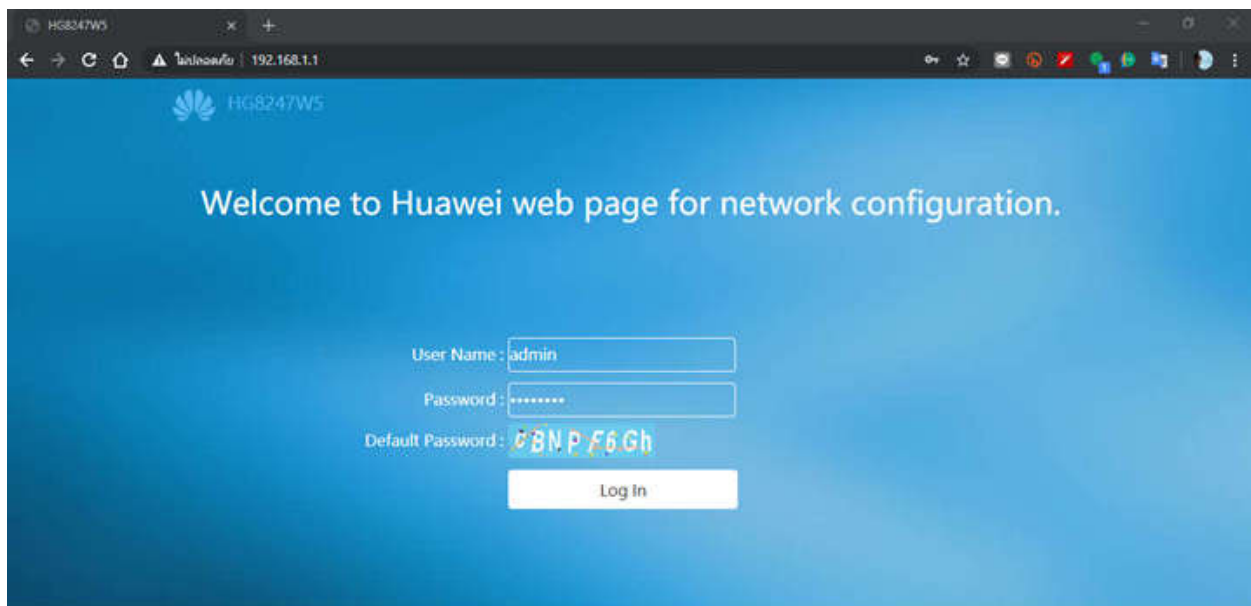

There're 2 types of settings:

Check both LAN and Wi-Fi

1. At Status you can view information at Wi-Fi Devices and Wired Devices

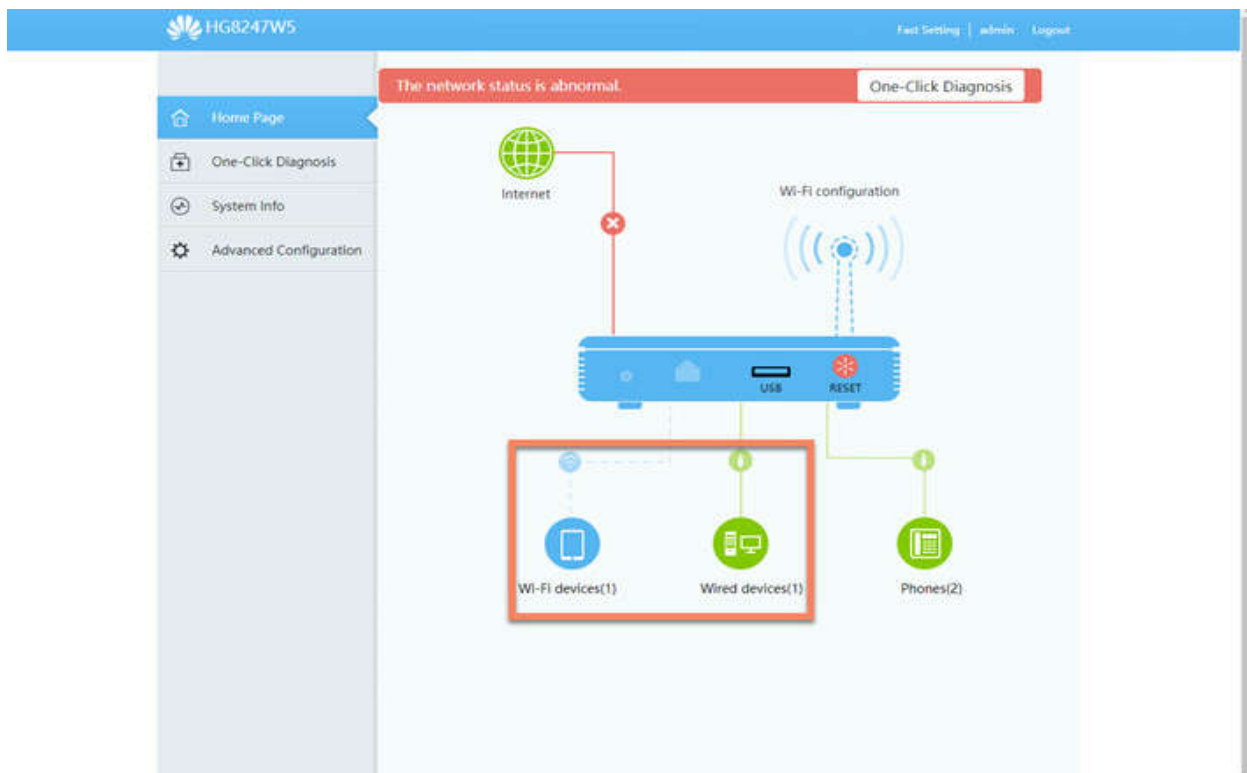

2. Wi-Fi Devices information

Advanced Configuration

Wi-Fi devices(1) Wired devices(1) Phones(2)

Wi-Fi devices | Refresh

Device Name	Port ID	Device Info	Device Status	Connection Duration	Operations
iPhone	SSID1	0c:77:1a:16:06:4c 192.168.1.34	Online	0 hour 6 minutes	Details Share Access Application

3. Wired Devices information

Advanced Configuration


Wi-Fi devices(1) Wired devices(1) Phones(2)

Wired devices | Refresh


Device Name	Port ID	Device Info	Device Status	Connection Duration	Operations
CNTY-KOMSANT	LAN1	9c:5a:44:56:e3:52 192.168.1.33	Online	0 hour 24 minutes	Details Share Access Application

Check connected device at Wi-Fi devices only

1. At Status, select System Info

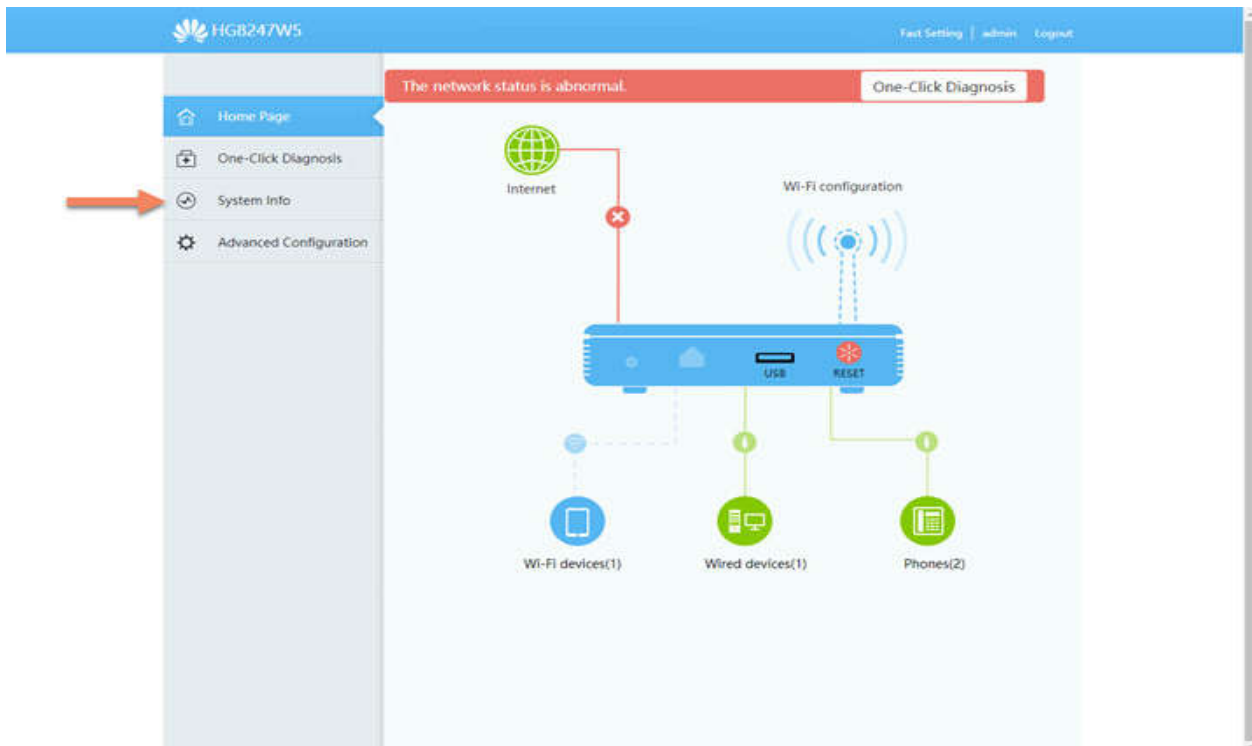

2. Select WLAN Information > choose wireless network that you want to check > go down

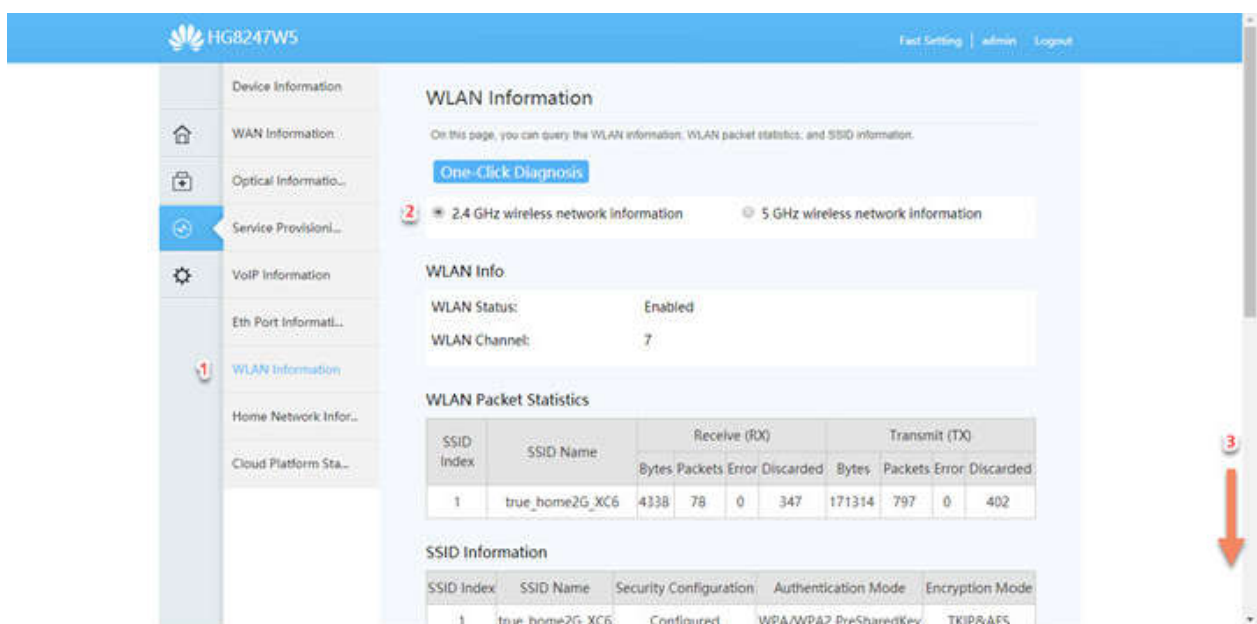

3. At STA Information, select Query

Cloud Platform Sta...

Index	SSID Name	Bytes	Packets	Error	Discarded	Bytes	Packets	Error	Discarded
1	true_home2G_XC6	4338	78	0	347	171314	797	0	402

SSID Information

SSID Index	SSID Name	Security Configuration	Authentication Mode	Encryption Mode
1	true_home2G_XC6	Configured	WPA/WPA2 PreSharedKey	TKIP&AES

STA Information

Query

MAC Address	SSID Name	Connection Duration (s)	Sending Rate (Mbit/s)	Receiving Rate (Mbit/s)	Signal Strength (dBm)	Noise (dBm)	Signal-to-Noise Ratio (dB)	Signal Quality (dBm)	Antenna Num	11k	11v	Dual

Neighbor AP Information

Query Note: Querying neighbor AP information may disconnect all STA connections.

SSID Name	MAC Address	Network Type	Channel	Signal Strength (dBm)	Noise (dBm)	DTIM Interval	Beacon Period (ms)	Authentication Mode	Working Mode	Max. Rate (Mbit/s)

4. System will show List of devices connected via Wi-Fi

Cloud Platform Sta...

Index	SSID Name	Bytes	Packets	Error	Discarded	Bytes	Packets	Error	Discarded
1	true_home2G_XC6	4338	78	0	347	171314	797	0	402

SSID Information

SSID Index	SSID Name	Security Configuration	Authentication Mode	Encryption Mode
1	true_home2G_XC6	Configured	WPA/WPA2 PreSharedKey	TKIP&AES

STA Information

Query

Number of STAs: 1

MAC Address	SSID Name	Connection Duration (s)	Sending Rate (Mbit/s)	Receiving Rate (Mbit/s)	Signal Strength (dBm)	Noise (dBm)	Signal-to-Noise Ratio (dB)
0C:77:1A:16:06:4C	true_home2G_XC6	882	65	65	-28(Stronger)	-86	58

Neighbor AP Information

Query Note: Querying neighbor AP information may disconnect all STA connections.

SSID Name	MAC Address	Network Type	Channel	Signal Strength (dBm)	Noise (dBm)	DTIM Interval	Beacon Period (ms)	Authentication Mode	Working Mode	Max. Rate (Mbit/s)