

## การตั้งค่า UPnP สำหรับ DASAN H660RW (With Wireless)

1. พิมพ์ 192.168.1.1 กด Enter ใส่ Username = admin, Password = password จากนั้นกด LOGIN



Username: admin  
Password: password  
Language: English  
LOGIN CLEAR

2. เมื่อดำเนินการ เลือก Advance Setup

Language: English Advance Setup Log Out xPON ONU

Easy Page Setup

**WAN Connections**

PPPoE

Interface	Username	Password	VLAN
WAN0	18d07176eed0@truehisp	password	100

**LAN**

DHCP:  Disabled  Enabled  
Lease Time: 86400

DNS

DNS Mode:  Automatically  Manually  
Primary DNS: 8.8.8.8  
Secondary DNS: 8.8.4.4

**Ethernet Port Status**

Port	Admin	Status	Mode
1	Up	Up	Full/1000
2	Up	Down	Na/Na
3	Up	Down	Na/Na
4	Up	Down	Na/Na

**Dynamic DNS**

Dynamic DNS:  Activated  Deactivated  
Interface: WAN0  
Service Provider: www.dyn.com  
My Host Name:   
Username:   
Password:


**Modem Password**

Username: admin  
New Password:   
Confirm Password:

APPLY CLEAR REBOOT

### 3. ไปที่ Firewall Setup > UPnP ตรวจสอบการตั้งค่า ดังนี้

- UPnP เลือก Activated
- Auto-configured เลือก Activated
- กด APPLY

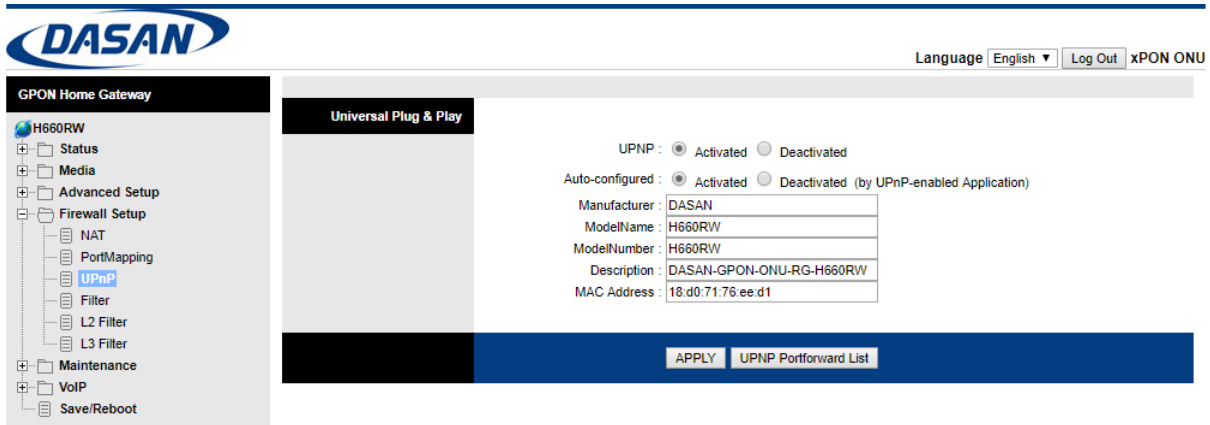

The screenshot shows the web interface of a DASAN GPON Home Gateway. The top navigation bar includes the DASAN logo, a language dropdown set to English, and a Log Out button. The main content area is titled "Universal Plug & Play" and contains the following configuration options:

- UPnP:  Activated  Deactivated
- Auto-configured:  Activated  Deactivated (by UPnP-enabled Application)
- Manufacturer:
- ModelName:
- ModelNumber:
- Description:
- MAC Address:

At the bottom of the configuration area, there are two buttons: "APPLY" and "UPnP Portforward List". On the left side, a sidebar menu shows the navigation structure, with "UPnP" selected under the "Firewall Setup" category.