


USER MANUAL
Smart CCTV Camera 1080P
Thank you for using smart camera

1. Product Introduction

Packing list: Smart Camera × 1, Manual × 1, USB Power Cord × 1, Power Adapter × 1, Screw Accessories Package × 1

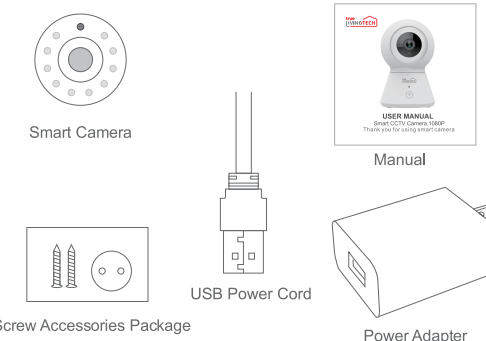

01

Basic Parameters

Product Name: Smart CCTV Camera 1080P
Pixel: 2.0MP
Video Compression: H.264 High Profile
Image Enhancement: Digital Wide Dynamic 3D Noise Reduction
Local Storage: Micro SD card
Wireless Encryption: WEP/WPA/WPA2 Encryption
Power Input: 5V 1A(Min)
Total Power Consumption: 5W (Max)
Wireless Standard: 2.4G 802.11 b/g/n
Support Platform: Android/iOS


Component Description:
Reset Button: Long press "reset" hole 5sec, reset success.

It is recommended to insert 8-128GB (Class 10) high-speed Micro SD Card, otherwise it will not be able to store, view historical video and support important functions such as firmware upgrading.

02

2. Install APP


Download APP: scan the QR code below to download and install.
Register and login: open the " True LivingTECH " APP to register and login according to the prompts.



03

3.1 Add The Device-Scan QR code mode


Make sure Wi-Fi is available and connected to the Internet.
Connect the camera to the power, then system startup completed.
Open "True LivingTECH" APP, press the '+' in the upper right corner of the main screen (Figure 01); choose "Security & Video Surveillance" click "Smart Camera" (Figure 02) to add camera; and then click "Next step" (Figure 03);

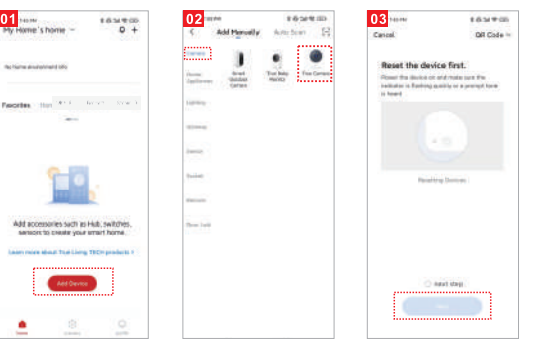

04


Please note that only 2.4 GH Wi-Fi network is supported;

If the mobile phone is not connected to Wi-Fi, please click "Connect to Wi-Fi" (Figure 04);
It will jump to the WLAN interface and connects Wi-Fi (Figure 05);
If the phone is connected to Wi-Fi (Figure 06);

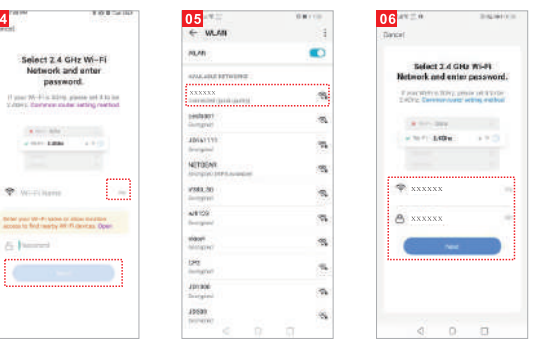


05

A QR code will prompt on your screen and you need to scan it with the Smart Camera, (the camera is about 20-30 cm away from the mobile phone lens). Then click "hear the prompt sound" (Figure, 07).
"connecting" (Figure, 08);

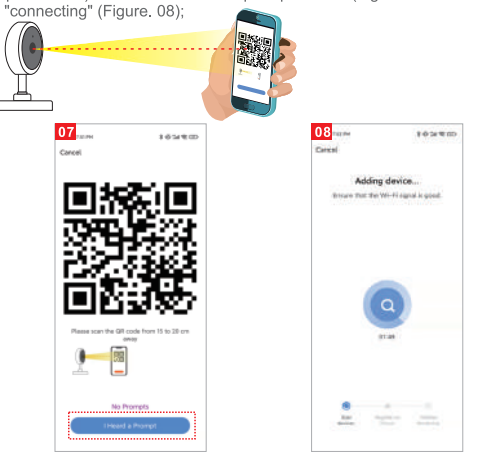

06


connection completed(Figure 09), and click "Done";
Then jump to preview interface (Figure 10)
After closing the device preview interface, the interface returns to the APP home page. At this time, the connected device will appear on the APP home page (Figure 11). Then you can click directly to the device interface to see the monitoring situation without re-adding afterwards.

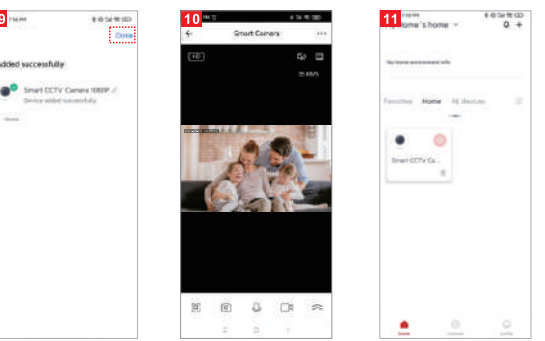

07


3. 2. Add The Device- AP Mode

First set the machine to the hot spot distribution network mode
Find the reset button on the device. Then press and hold to reset. After that press Double Click on the button to the back of the camera. The camera will change the sound "Beep" to "Blink Blink" and the hot spot will be activated

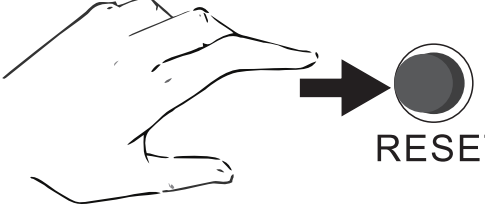


08

Select "AP Mode" (Figure 12)
Click Next (Figure 13)
Enter the account and password that can connect to Wi-Fi (Figure 14)

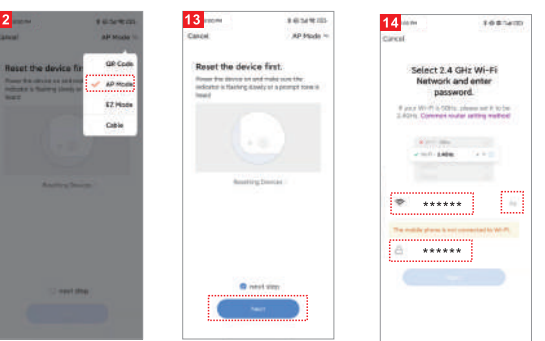


09

Click "Go Connect" (Figure 15)
Go to "Smart Life-XXX" and click Connect (Figure 16)
Connecting (Figure 17)

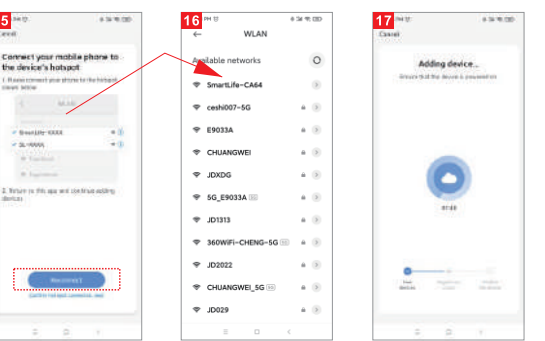


10

Click to complete the connection (Figure 18)
Video screen (Picture 19)

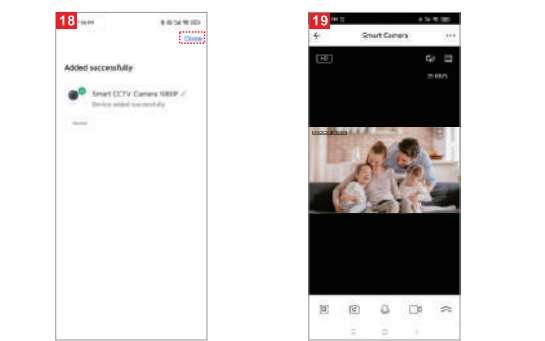

11

4. Other connection methods

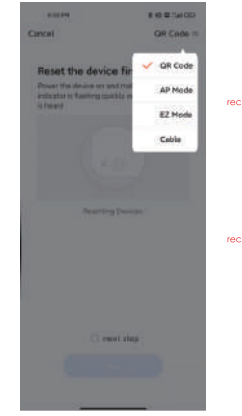

1. QR Code
Camera aiming at QR code

2. AP Mode
Mobile phone search machine signal code

3. EZ Mode
Mobile APP→Wi-Fi→search machine

4. Cable
USB cable connection

12

5. Matters Need Attention

Try to keep away from the metal space;
Avoid the furniture , microwave oven blocked;
Avoid the space where the audio, video and data lines are around, and keep the space away from them as large as possible;
Ensure that as close as possible to the coverage of wireless Wi-Fi signals. Switching network environment:
In the new network environment, please press the reset hole about 5 seconds, then connect to the network.

13

The name and content of the harmful substances in the product

Part Name	Harmful Substance					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE
shell	○	○	○	○	○	○
Board	X	○	○	○	○	○
charger	○	○	○	○	○	○
annex	○	○	○	○	○	○

This form is based on the provisions of SJ/T 11364.

This product conforms to RoHS environmental protection requirements. At present, there is no mature technology in the world to replace or reduce the lead content in the electronic ceramics, porcelain, optical glass, steel and copper alloy.

14

Maintenance records: _____
Maintenance time: _____
Fault conditions: _____
Fault cause: _____
Troubleshooting: _____
Return and exchange proof: _____
Date of validity: _____
Original device ID: _____
New device ID: _____
maintenance personnel signature: _____
Maintenance Department seal: _____

Maintenance voucher of intelligent
Customer: _____ Mobile: _____
Address: _____
Model: _____ Camera ID: _____
Device store: _____ Date of purchase: _____
Store address: _____
Store contact number: _____

Maintenance voucher of intelligent
Customer: _____ Mobile: _____
Address: _____
Model: _____ Camera ID: _____
Device store: _____ Date of purchase: _____
Store address: _____
Store contact number: _____