


Set up APN on True Super Hero 4G Super Entertainment


1. On main screen, select **(Menu)**




2. Select **(Settings)**

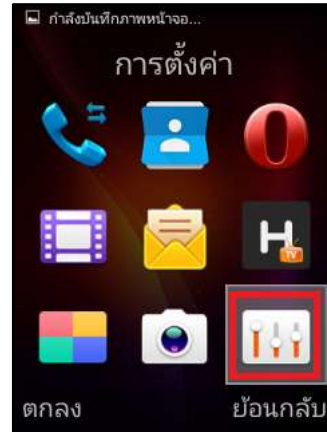

3. And then **(More)**

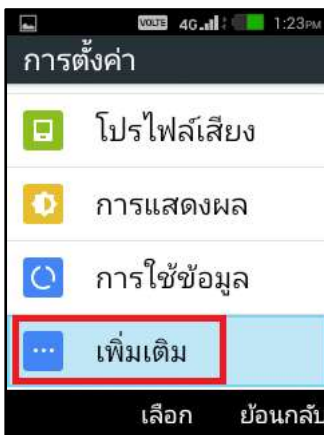


4. Select **(Mobile networks)**

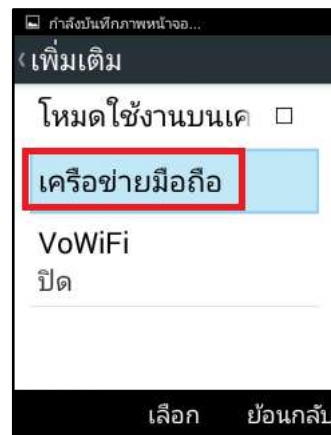


5. Go down and choose (Access Point Names)




6. Access Point Names as per SIM Card

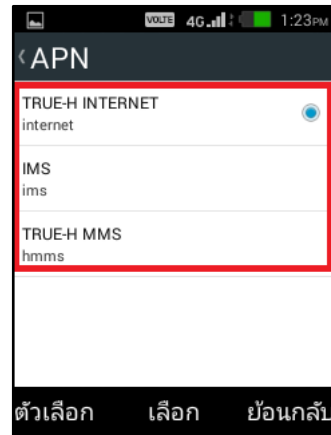


7. If no APN or it's incorrect setting, choose (Options)

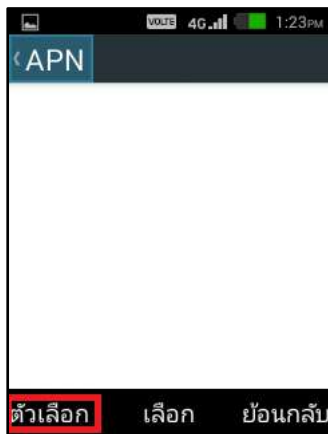


8. And press (Reset to default)

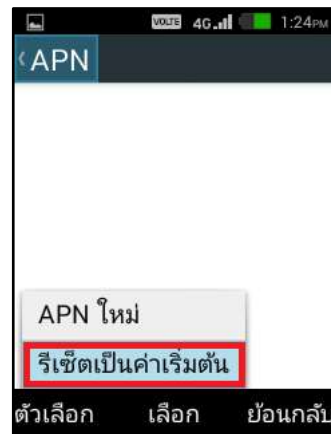

9. A warning page to delete APN, press **(OK)** to confirm

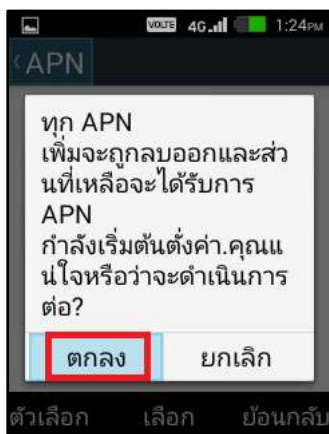


10. Wait for resetting process

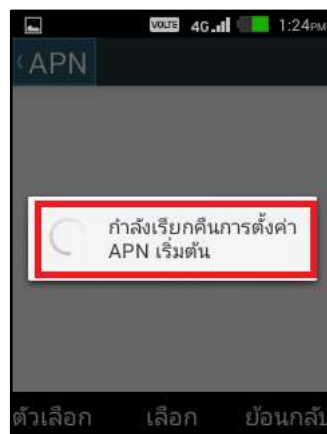

11. When completed, a message “Reset default APN settings completed.” and APN as per SIM Card will automatically appear



12. To manually set APN, choose **(Options)**

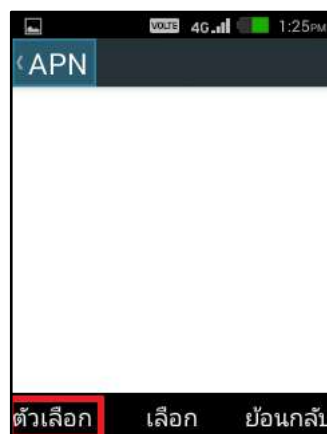

13. Select (New APN)



14. Edit access point page will appear



15. APN TRUE-H internet


- Name = TRUE-H internet
- APN = internet
- Username = true
- Password = true
- Server = http://m.truelife.com
- Authentication Type = PAP
- APN type = default,xcap,supl (recommended)
or default,supl or not set
- Press (Options)

16. Select (Save)



17. APN TRUE-H MMS

- Name = TRUE-H MMS
- APN = hmms
- Username = true (or not set)
- Password = true (or not set)
- MMSC = http://mms.trueh.com/8002
- MMS proxy = 10.4.7.39
- MMS port = 8080
- Authentication Type = PAP
- APN type = mms
- Press **(Options)** > **(Save)**

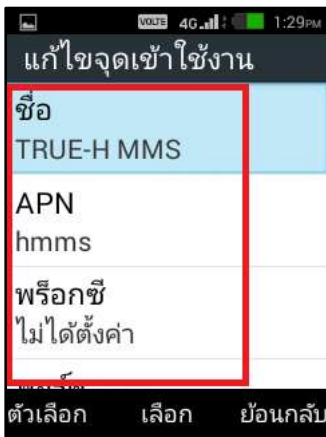

18. APN TRUE-H IMS

- Name = IMS
- APN = ims
- Username = not set
- Password = not set
- Authentication Type = PAP
- APN type = ims
- Press **(Options)** > **(Save)**



19. When finished and saved, APNs will appear as shown

