


## Set up APN Internet and MMS on True Super Talkie 4G


1. On main screen, select **(Menu)**



2. Select **(Settings)**

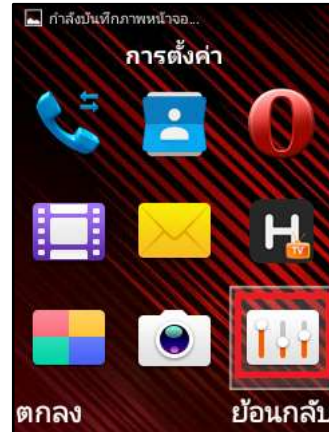


3. And then **(Data usage)**

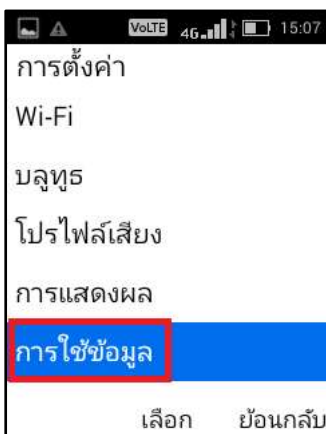

4. Choose to use Data from SIM Card or Wi-Fi

> select SIM Card


- TRUE = via SIM Card
- Wi-Fi = via Wi-Fi

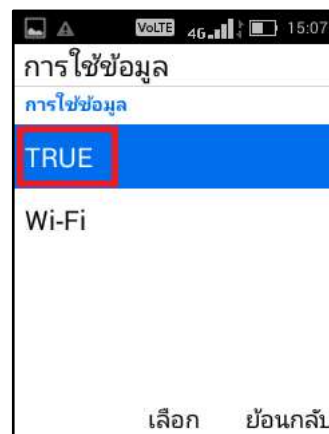

5. Select (Options)




6. And then (Cellular networks)

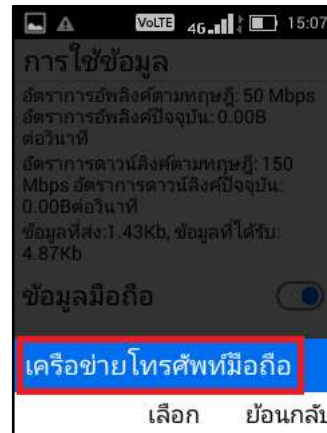


7. And then (Access Point Names)




8. Existing APN will display

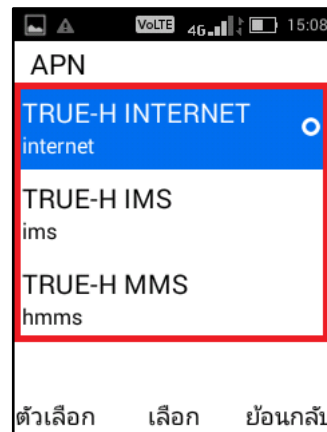


9. If no, or it's incorrect, choose **(Options)**

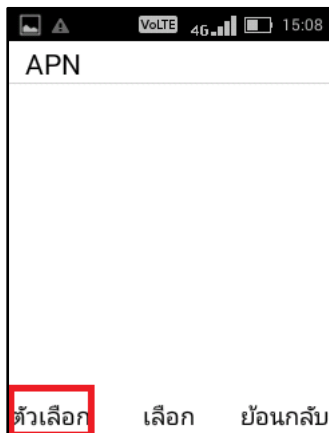

10. And then **(Reset to default)**

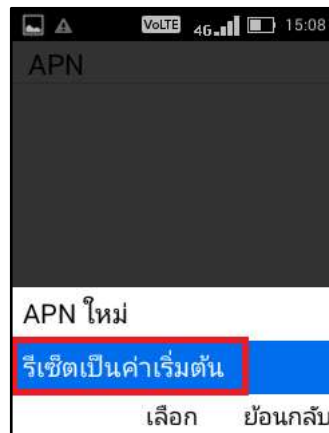

11. Warning page, press **(OK)**


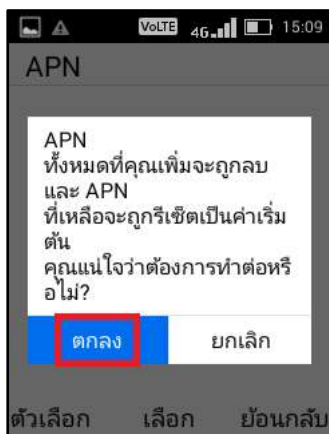


12. Restoring default APN settings...



13. “Reset default APN settings completed.” and APN will appear

14. If you want to manually set APN, choose (Options)

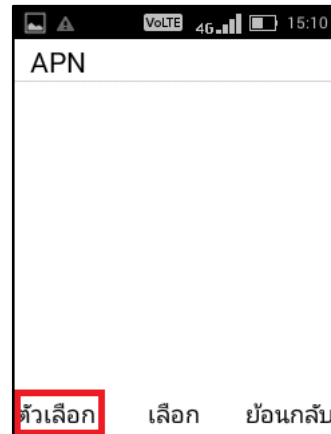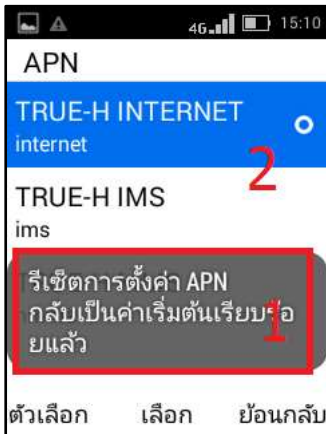


15. And then (New APN)

16. Edit access point



17. Set up TRUE-H internet as follows:

- Name = TRUE-H internet
- APN = internet
- Username = true
- Password = true
- Server = http://m.truelife.com
- Authentication Type = PAP
- APN type = default,xcap,supl (recommended)  
or default,supl or not set

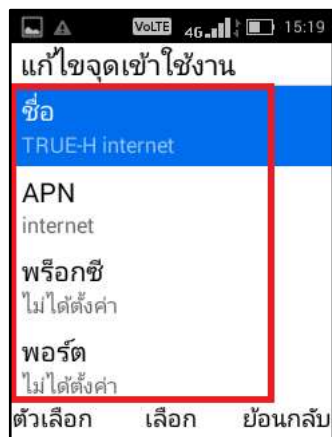


18. When completed, choose **(Options)**



19. And then **(Save)**



20. TRUE-H internet will appear and has been chosen for internet connection

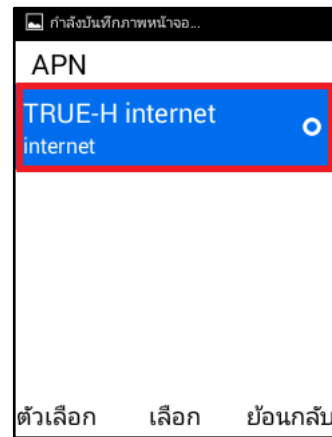

### 21. TRUE-H MMS

- Name = TRUE-H MMS
- APN = hmms
- Username = true (or not set)
- Password = true (or not set)
- MMSC = http://mms.trueh.com/8002
- MMS proxy = 10.4.7.39
- MMS port = 8080
- Authentication Type = PAP
- APN type = mms

### 22. TRUE-H IMS

- Name = TRUE-H IMS
- APN = ims
- Username = not set
- Password = not set
- Authentication Type = PAP
- APN type = ims

23. When completed, 2 APNs will appear

- TRUE-H MMS
- TRUE-H IMS

