


## Set up Truemail account for ThunderBird

### 1. Open Mail of ThunderBird




### 2. Select View settings for account

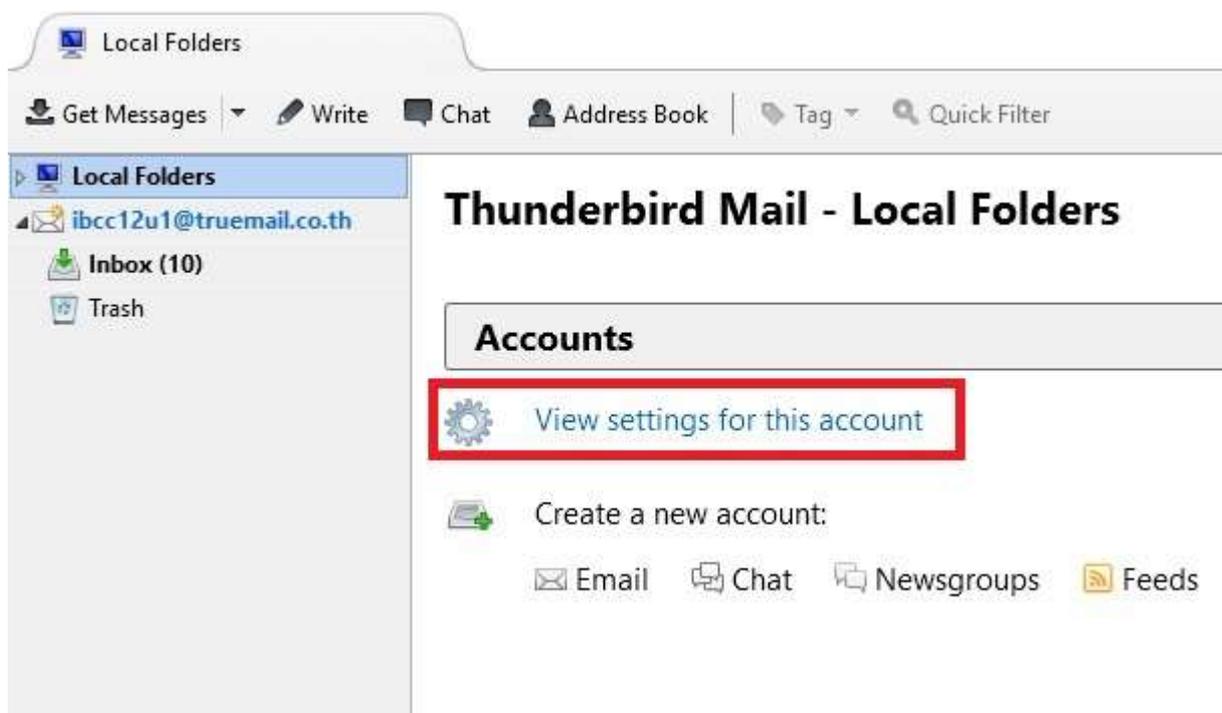

3. On left menu, select Server Settings and set up as follow:

- Server Name: pop.truemail.co.th, Port : 110
- User Name: Truemail Account
- Connection security: None
- Authentication Method: Password, transmitted insecurely
- Tick a check mark at Leave message on server

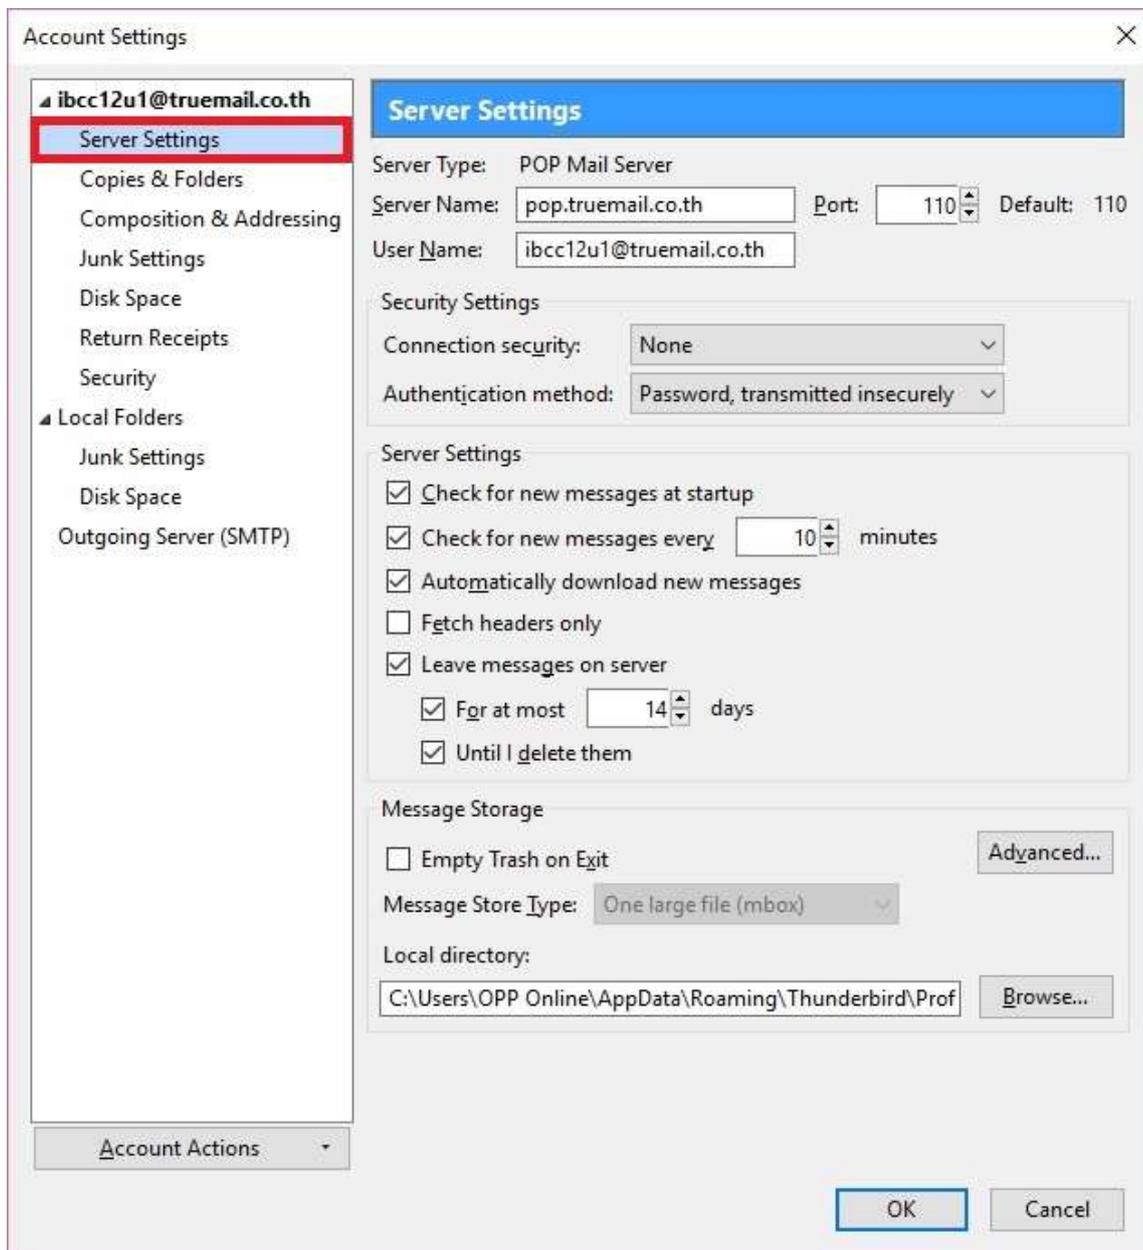

Account Settings

ibcc12u1@truemail.co.th

**Server Settings**

Server Type: POP Mail Server

Server Name: pop.truemail.co.th Port: 110 Default: 110

User Name: ibcc12u1@truemail.co.th

Security Settings

Connection security: None

Authentication method: Password, transmitted insecurely

Server Settings

Check for new messages at startup

Check for new messages every 10 minutes

Automatically download new messages

Fetch headers only

Leave messages on server

For at most 14 days

Until I delete them

Message Storage

Empty Trash on Exit


Message Store Type: One large file (mbox)

Local directory: C:\Users\OPP Online\AppData\Roaming\Thunderbird\Prof

Account Actions


OK Cancel

4. On left menu, select Outgoing Server (SMTP) and press Edit (right)

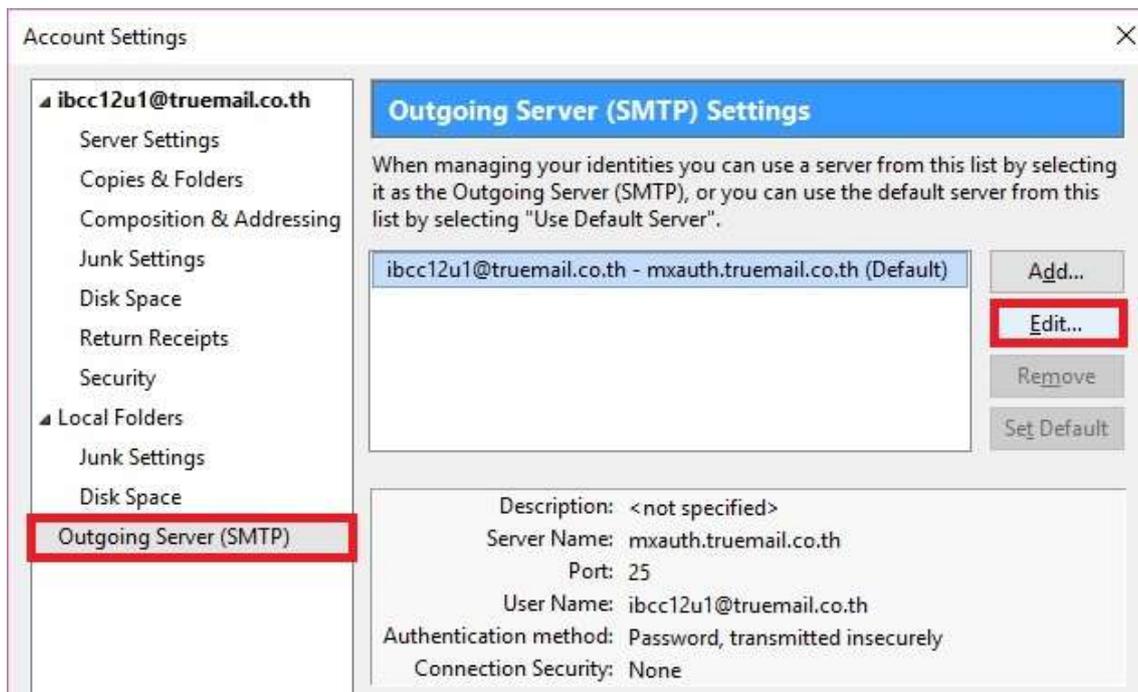


5. At SMTP Server, set up as follows:

- Server Name: mxauth.truemail.co.th
- Port: 25
- Connection security: None
- Authentication method: Password, transmitted insecurely
- User Name: Truemail Account
- Click OK

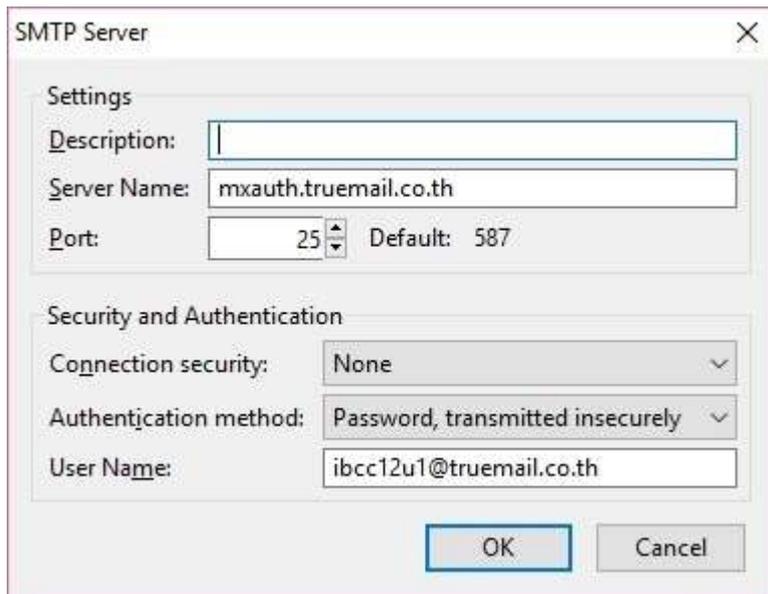

## 6. Back to Account Settings, press OK

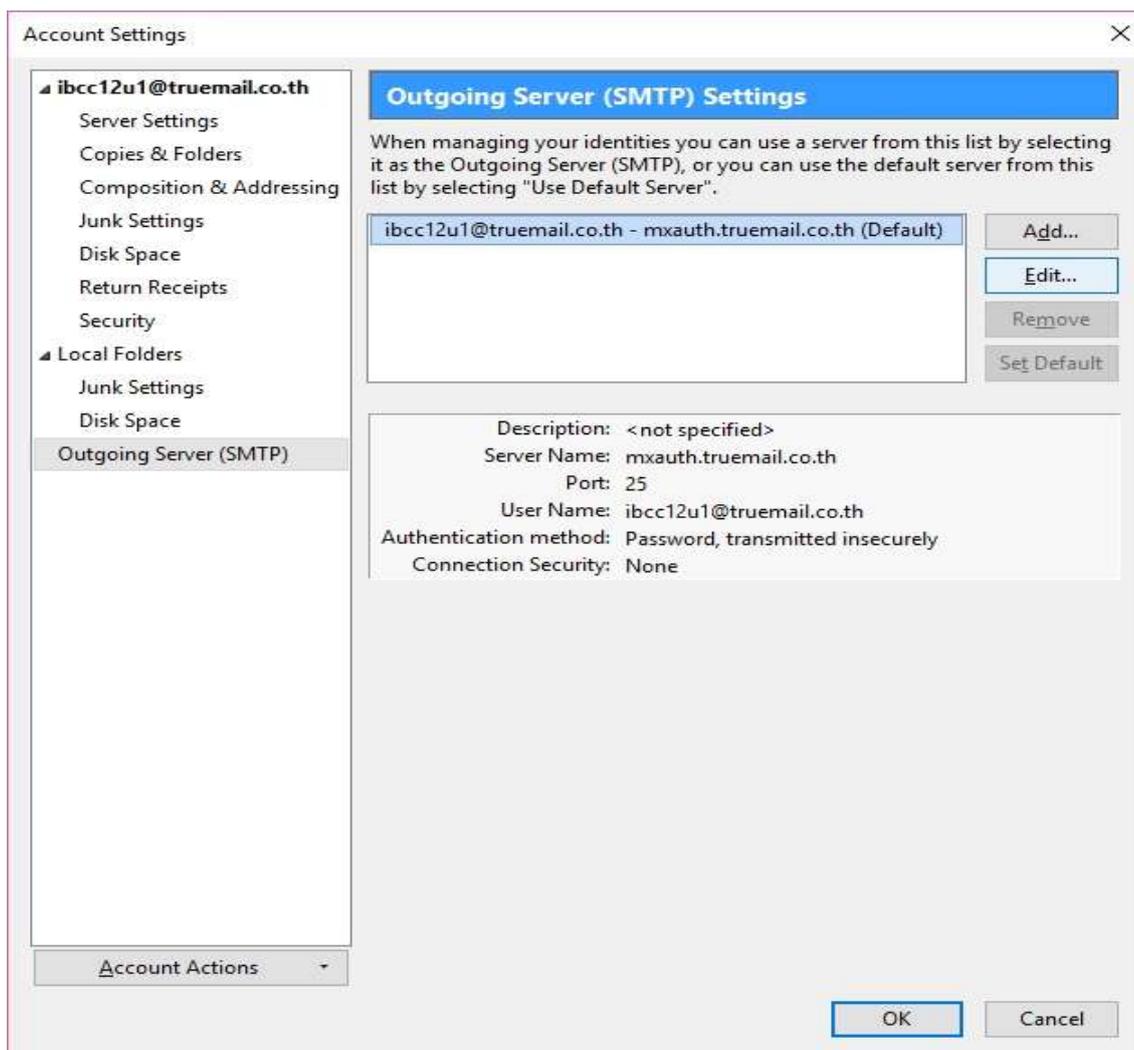

## 7. Back to main page of ThunderBird

