


การตั้งค่า LAN สำหรับ AP D-link DIR-605L

1. เปิด Browser พิมพ์ 192.168.0.1 ในช่อง Address แล้วกด Enter



2. พิมพ์ password ในช่อง Password แล้วกด Login

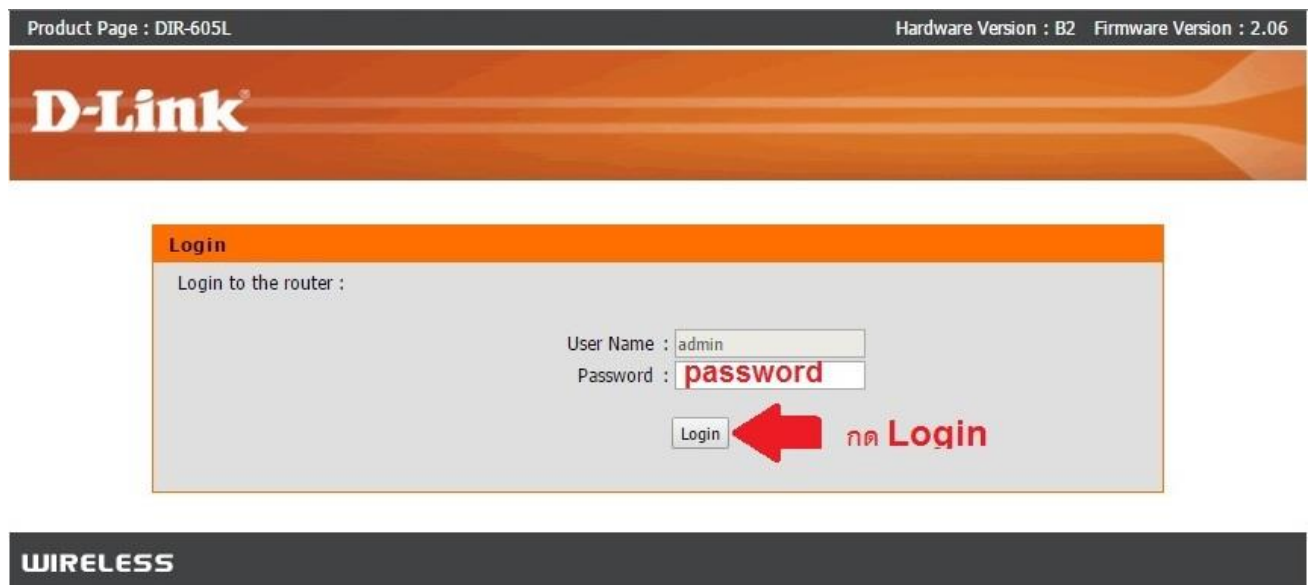

3. กดปุ่ม Advanced

CURRENT NETWORK SETTING

The current network settings and the connection status are displayed below. If you want to reconfigure your wireless settings, please click the "Configure" button. You can also enter advanced settings by clicking "Advanced". สถานะการเชื่อมต่อ **Internet**

Internet Settings

Internet Connection : Dynamic IP (DHCP) Status : **Connected**

Wireless Settings

Network Name (SSID) : CTCC_Docsis2 Status : **Encryption**

Security : Auto (WPA or WPA2) - Personal

Network Key : *****


Device Info

User Name : admin

Password : *****

mydlink Account

You have not activated mydlink service. Status : **Not Connected**

 กด **Advance**

4. เลือก LAN Setup

DIR-605L //	SETUP	ADVANCED	MAINTENANCE	STATUS
Easy Setup	<div style="background-color: #f4a460; padding: 5px;">INTERNET CONNECTION</div> <p>Use this section to configure your Internet Connection type. There are several connection types to choose from: Static IP, DHCP, PPPoE, PPTP, and L2TP. If you are unsure of your connection method, please contact your Internet Service Provider.</p> <p>เลือก Lan Setup</p> <p>Save Settings Don't Save Settings</p>			
Internet Connection				
Wireless Connection				
LAN Setup				
Time and Date				
Parental Control Rules				
Logout				
	<div style="background-color: #333; color: white; padding: 5px;">INTERNET CONNECTION TYPE</div> <p>Choose the mode to be used by the router to connect to the Internet.</p> <p>My Internet Connection is : <input type="text" value="Dynamic IP (DHCP)"/></p>			
	<div style="background-color: #333; color: white; padding: 5px;">DYNAMIC IP (DHCP) INTERNET CONNECTION TYPE</div> <p>Use this Internet connection type if your Internet Service Provider (ISP) didn't provide you with IP Address information and/or a username and password.</p> <p>Host Name : <input type="text" value="DIR-605L"/></p> <p>MAC Address : <input type="text" value="00"/> - <input type="text" value="00"/> - <input type="text" value="00"/> - <input type="text" value="00"/> - <input type="text" value="00"/> - <input type="text" value="00"/></p> <p>(optional) <input type="button" value="Copy Your PC's MAC Address"/></p> <p>Primary DNS Server : <input type="text" value="0.0.0.0"/></p> <p>Secondary DNS Server : <input type="text" value="0.0.0.0"/> (optional)</p> <p>MTU : <input type="text" value="1500"/> bytes MTU default 1500</p> <p>Save Settings Don't Save Settings</p>			

5. ตั้งค่า Default ตามรายการดังนี้ จากนั้นกด **Save Settings**

- **มรตั้งค่า Router IP Address**
 - Router IP Address : **192.168.0.1**
 - Subnet Mask : **255.255.255.0**
- **มรตั้งค่า DSCP**
 - ทำเครื่องหมายถูกที่ Enable DHCP Server
 - DHCP IP Address Range : **100** to **199**
 - DHCP Lease Time : **1440**
- **DHCP CLIENT LIST** : คือรายการอุปกรณ์ที่เข้ามาเชื่อมต่อกับ Router

Internet Connection

Wireless Connection

LAN Setup

Time and Date

Parental Control Rules

Logout

Use this section to configure the internal network settings of your router and also to configure the built-in DHCP Server to assign IP addresses to the computers on your network. The IP Address that is configured here is the IP Address that you use to access the Web-based management interface. If you change the IP Address here, you may need to adjust your PC's network settings to access the network again.

Please note that this section is optional and you do not need to change any of the settings here to get your network up and running.

Save Settings **ตั้งค่าเรียบร้อยกด Save Setting**

ROUTER SETTINGS

Use this section to configure the internal network settings of your router. The IP Address that is configured here is the IP Address that you use to access the Web-based management interface. If you change the IP Address here, you may need to adjust your PC's network settings to access the network again.

Router IP Address: **ตั้งค่า Router IP Address**

Subnet Mask :

Local Domain Name :

Enable DNS Relay :

DHCP SERVER SETTINGS

Use this section to configure the built-in DHCP Server to assign IP addresses to the computers on your network.

ตั้งค่า DHCP

Enable DHCP Server :

DHCP IP Address Range : to (address within the LAN subnet)

DHCP Lease Time : (minutes)

DHCP CLIENT LIST

Host Name	IP Address	MAC Address	Expired Time
DESKTOP-K797IHV	192.168.0.101	20:c9:d0:cd:3d:75	23 Hours 36 Minutes

List อุปกรณ์ที่เชื่อมต่อเข้า

These are the settings of the LAN interface for the device.

If you have devices on your network that should always have fixed IP addresses, add a DHCP Reservation for each such device.

6. กด Reboot Now

DIR-605L	SETUP	ADVANCED	MAINTENANCE	STATUS
Easy Setup	<div style="background-color: #f4a460; padding: 5px;">REBOOT NEEDED</div> <p>Your changes have been saved. The router must be rebooted for the changes to take effect. You can reboot now, or you can continue to make other changes and reboot later.</p> <div style="display: flex; justify-content: space-around;"> <input type="button" value="Reboot Now"/> <input type="button" value="Later"/> </div>			
Internet Connection				
Wireless Connection				
LAN Setup				
Time and Date				
Parental Control Rules				
Logout				

กด Reboot Now

7. รอ Router Reboot ประมาณ 10 วินาที

Product Page : DIR-605L	Hardware Version : B2 Firmware Version : 2.06
รอ Router Reboot ประมาณ 10 วินาที	
<div style="background-color: #f4a460; padding: 5px;">REBOOTING...</div> <p>Please wait 10 seconds</p> <p>If you changed the IP address of the router you will need to change the IP address in your browser before accessing the configuration Web site again.</p>	
WIRELESS	