


การตั้งค่า Forward Port ของ HUAWEI HG8247H

1. พิมพ์ 192.168.1.1 ที่ Browser จากนั้นใส่ Username = **admin** / Password = **password**
และกด Login



2. ไปที่เมนู **Forward Rules > Port Mapping Configuration > กดปุ่ม New**

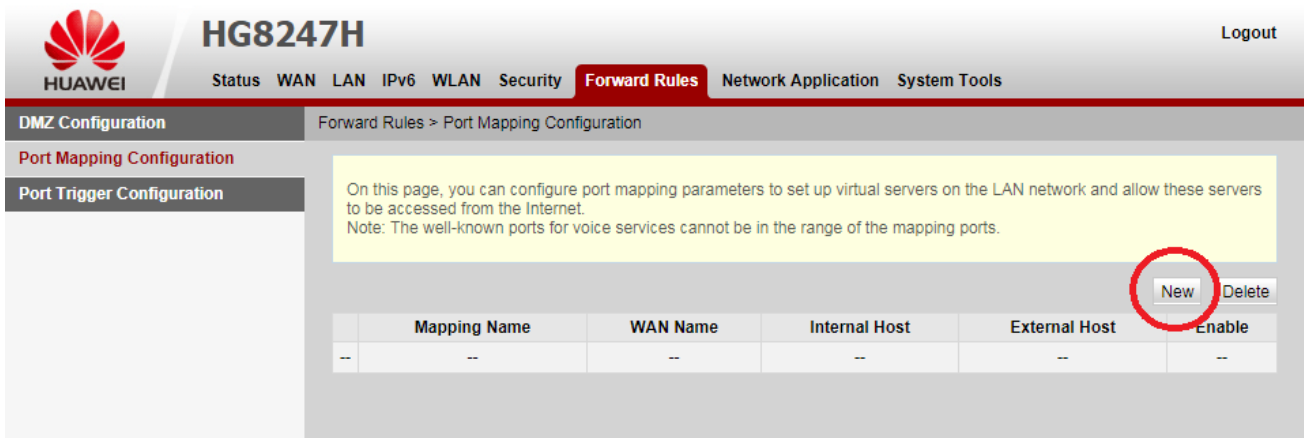

3. ตั้งค่าดังนี้

- 1) Type : เลือก User-defined
- 2) Application : ไม่ต้องเลือก
- 3) Enable Port Mapping : ทำเครื่องหมายถูกเพื่อเปิดใช้งาน
- 4) Mapping Name : ตั้งชื่อหัวข้อที่ต้องการ
- 5) Internet Host : ใส่ IP Address ของอุปกรณ์ที่ต้องการ Forward port
- 6) External Source IP Address ไม่ต้องใส่
- 7) กด Add

HG8247H Logout

Status WAN LAN IPv6 WLAN Security **Forward Rules** Network Application System Tools

DMZ Configuration Forward Rules > Port Mapping Configuration

Port Mapping Configuration

Port Trigger Configuration

On this page, you can configure port mapping parameters to set up virtual servers on the LAN network and allow these servers to be accessed from the Internet.
 Note: The well-known ports for voice services cannot be in the range of the mapping ports.

New Delete

Mapping Name	WAN Name	Internal Host	External Host	Enable
----	----	----	----	----

Type: **1** User-defined Application

Application: **2**

Enable Port Mapping: **3**

Mapping Name: **4**

WAN Name:

Internal Host: **5** *

External Source IP Address: **6** --

7

4. หลังจากกดปุ่ม Add แล้ว ให้ตั้งค่าดังนี้

- 1) Protocol : เลือกตามอุปกรณ์ที่ใช้งาน ถ้าไม่แน่ใจให้เลือก TCP/UDP
- 2) Internal Port number : ใส่ Port ที่ต้องการ Forward
- 3) External Port number : ใส่เหมือน Internal Port number
- 4) ถ้าต้องการตั้งค่าเพิ่มให้กดปุ่ม Add และตั้งค่าที่ต้องการ
- 5) ตั้งค่าเรียบร้อยแล้วกดปุ่ม Apply เพื่อบันทึกข้อมูล
- 6) ถ้าต้องการลบให้กดปุ่ม Delete

HG8247H Logout

Status WAN LAN IPv6 WLAN Security **Forward Rules** Network Application System Tools

DMZ Configuration Forward Rules > Port Mapping Configuration

Port Mapping Configuration

Port Trigger Configuration

On this page, you can configure port mapping parameters to set up virtual servers on the LAN network and allow these servers to be accessed from the Internet.
Note: The well-known ports for voice services cannot be in the range of the mapping ports.

New Delete

Mapping Name	WAN Name	Internal Host	External Host	Enable
----	----	----	----	----

Type: User-defined Application

Application: Select...

Enable Port Mapping:

Mapping Name: DVR1

WAN Name: 1_TR069_INTERNE

Internal Host: 192.168.1.108 Select...

External Source IP Address: [] -- []

Protocol: **1** TCP/UDP Internal port number: **2** 81 -- 81

External port number: **3** 11001 -- 11001 External source port number: [] -- []

Delete

Protocol: TCP/UDP Internal port number: 88881 -- 88881

External port number: 11000 -- 11000 External source port number: [] -- []

Delete **6**

4 Add

ถ้าต้องการลบการตั้งค่าให้กด Delete

5 Apply Cancel

5. หลังจากตั้งค่าแล้ว จะกลับมาหน้าแรก จะพบข้อมูลที่เรานับที่ไว้

Forward Rules > Port Mapping Configuration

On this page, you can configure port mapping parameters to set up virtual servers on the LAN network and allow these servers to be accessed from the Internet.
Note: The well-known ports for voice services cannot be in the range of the mapping ports.

	Mapping Name	WAN Name	Internal Host	External Host	Enable
<input type="checkbox"/>	DVR1	1_TR069_INTERNET_R_VID_100	192.168.1.108	--	Enable

6. กรณีต้องการลบ Profile การ Forward Port

- 1) ทำเครื่องหมายถูกหน้า Profile ที่ต้องการ
- 2) กดปุ่ม Delete
- 3) จะพบ pop up ให้ยืนยันการลบ ถ้าต้องการลบให้กดตกลง

Are you sure you want to delete the current port mapping rule?

ตกลง ยกเลิก

1

	Mapping Name	WAN Name	Internal Host	External Host	Enable
<input checked="" type="checkbox"/>	DVR1	1_TR069_INTERNET_R_VID_100	192.168.1.108	--	Enable

2

Type: User-defined Application

Application:

Enable Port Mapping:

Mapping Name:

WAN Name:

Internal Host:

External Source IP Address: --

Protocol: Internal port number: --

External port number: -- External source port number: --

Delete Add

Apply Cancel