


วิธีการเปลี่ยน IP Gateway ของ Modem Cisco EPC2325

1. เปิด Browser และในช่อง Address พิมพ์ `http://192.168.0.1` > จะขึ้น Popup ขึ้นมาให้พิมพ์ Username = `admin`
Password = `W2402` และคลิกที่ปุ่ม OK

หมายเหตุ : Lot Modem ที่มาตอนแรกจะตั้งค่าตามข้อ 1 ก่อนแต่ Lot หลังจะใช้เป็น Standard เดียวกับ Thomson คือเข้า
Config ที่ IP = `192.168.1.1` / Username = `admin` / Password = `password`

2. คลิก Setup

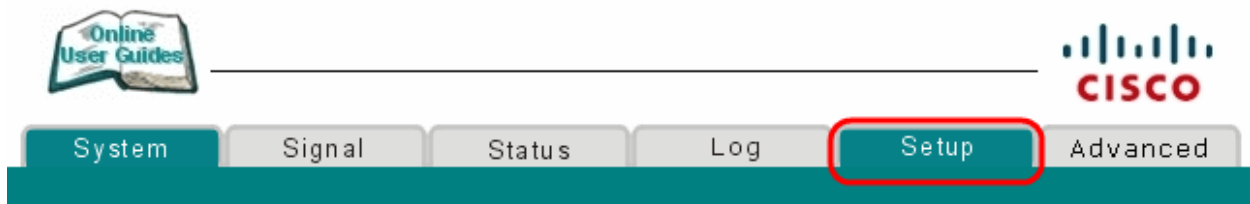

3. ที่หัวข้อ Basic Setting คลิกที่ Network Configuration

Basic Settings:

- [Password Settings](#)
- [Set Time](#)
- [Network Configuration](#)
- [LAN IP Address Management](#)
- [Fixed CPE IP Assignment](#)
- [Restart Modem](#)
- [Save Configuration to your PC](#)
- [Dynamic DNS](#)

4. ที่หัวข้อ LAN ที่ช่อง IP Address สามารถแก้ไขได้

โดยทั่วไป ถ้าจะเปลี่ยนเพื่อไม่ให้ IP ชนกับอุปกรณ์อื่น จะเปลี่ยนเพียงหลักสุดท้ายเท่านั้น

LAN

IP Address:	<input type="text" value="192.168.0.1"/> / <input type="text" value="24"/>
IP Network:	192.168.0.0
Decimal NetMask:	255.255.255.0
Broadcast:	192.168.0.255
MAC Address	48:44:87:24:ee:dd

5. คลิก Apply

LAN

IP Address: /
IP Network: **192.168.0.0**
Decimal NetMask: **255.255.255.0**
Broadcast: **192.168.0.255**
MAC Address: **48:44:87:24:ee:dd**

WAN

IP Address: ---.---.---.---
Subnet Mask: ---.---.---.---
Gateway IP: ---.---.---.---
Duration: **D: -- H: -- M: -- S: --**
Expires: ---:---:---:---



Host Name (Required by some ISPs)
Domain Name (Required by some ISPs)
Static IP Address . . .
Static IP Mask . . .
Default Gateway . . .
Primary DNS (static IP only) . . .
Secondary DNS (static IP only) . . .
MTU Size (256-1500 octets, 0 = use default)