


First setting and set up Wizard menu for HUMAX HV100-02

1. Type 192.168.1.1 in the Address bar on Browser then press **Enter**




2. You'll find Welcome page to Setup Wizard, then press **NEXT**

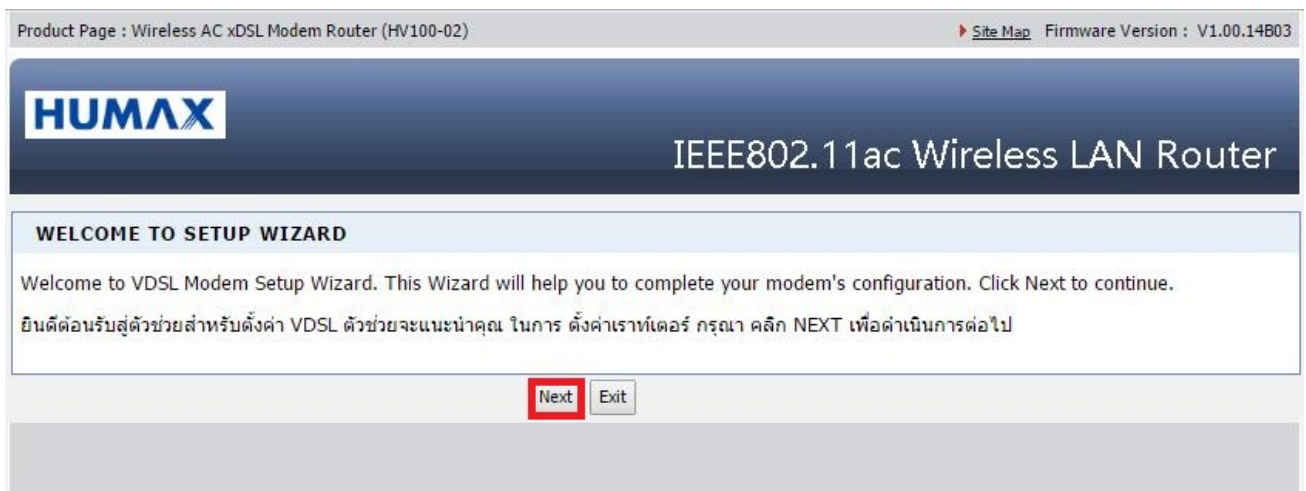


3. Enter the Password : password then press **Login**



4. Do you want to config Router to Plug & Play?

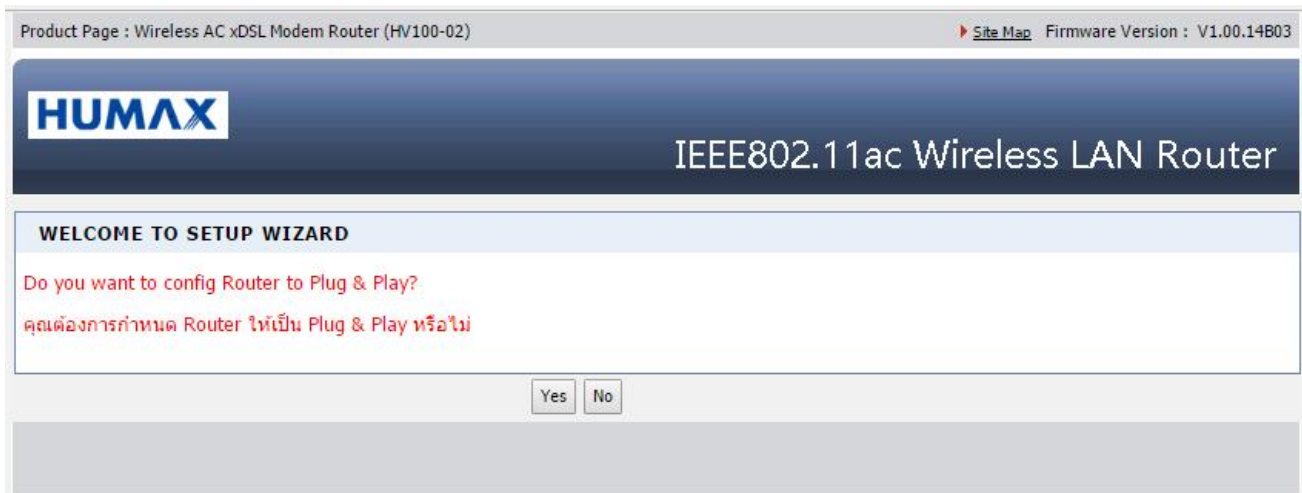

5. Press **Yes**, Router will restart which takes around 120 seconds

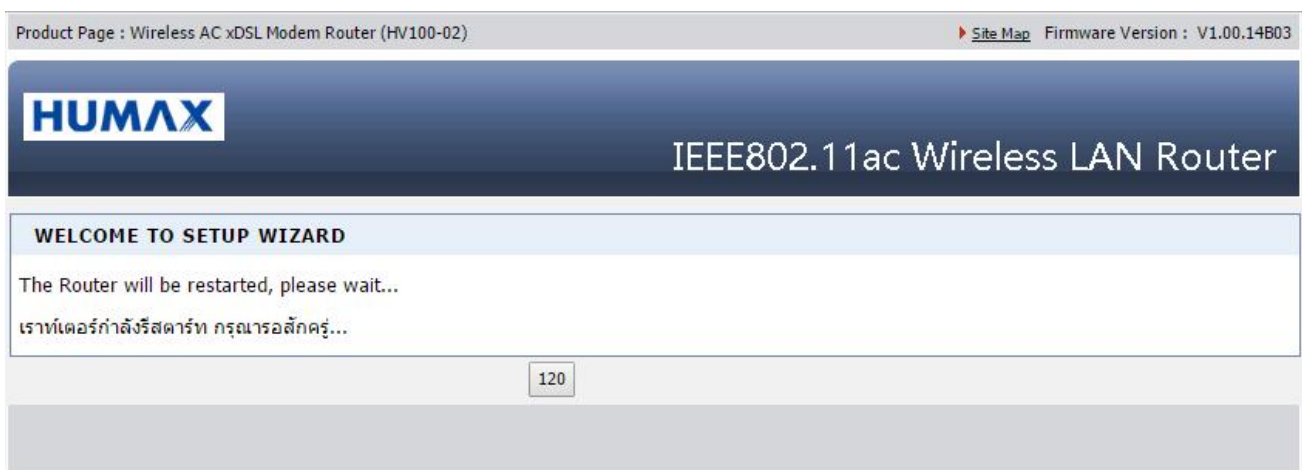

5.1. After restarting, if Router is connecting the Internet, you'll find a wizard to press Refresh or Login

5.1.1. **Refresh button:**

5.1.1.1. if Router unsuccessfully connected Internet, it's still on this page


5.1.1.2. if Router successfully connected Internet, it will show

Welcome.truelife.com

5.1.2. **Login button:** if press, it will return to Login Router page again



5.2. After restarting, if Router connected successfully, you'll find page welcome.truelife.com

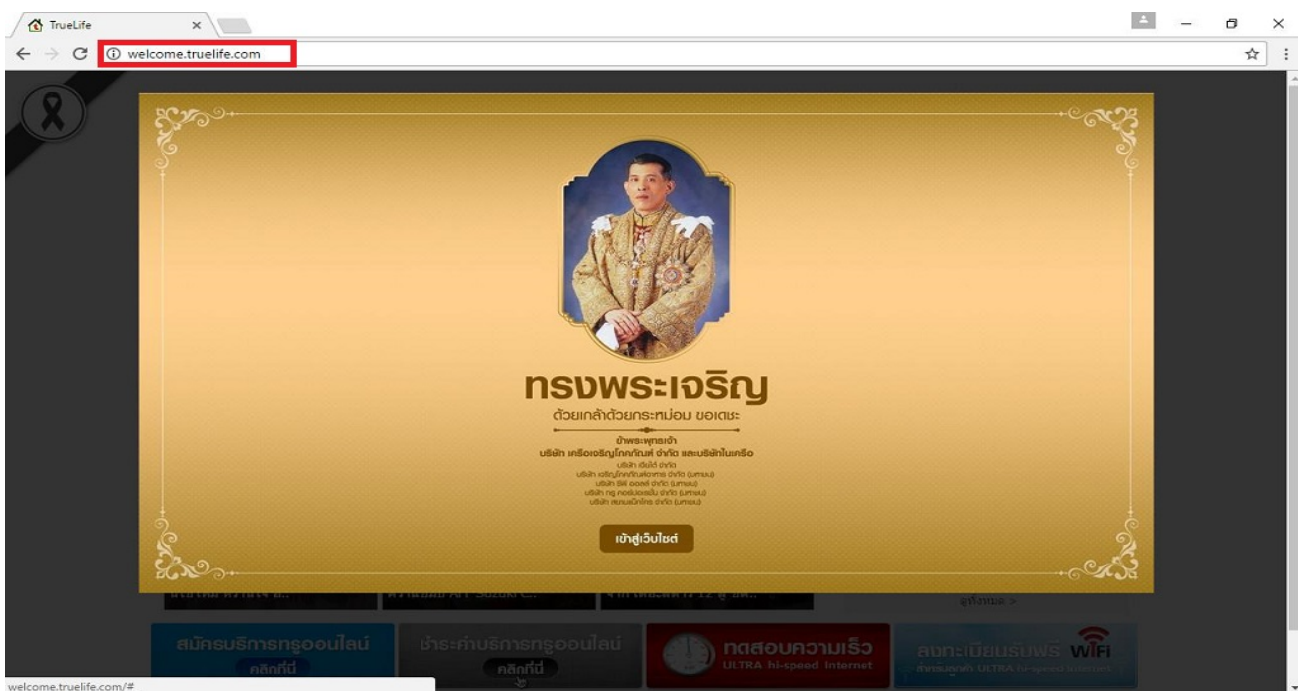

6. Press **No**, you'll find page to set up PPPoE
 - User Name: received from Internet service provider (True) e.g. 123456@truehisp
 - Password: received from Internet service provider (True)
 - Connection: select AlwaysOn
 - Then press **Next**

Product Page : Wireless AC xDSL Modem Router (HV100-02) Site Map Firmware Version : V1.00.14B03

HUMAX IEEE802.11ac Wireless LAN Router

WELCOME TO SETUP WIZARD

Quick Start - PPPoE/PPPoA.
Enter Username and Password that you have already registered and then select connection type. Click NEXT to continue.

การตั้งค่า - PPPoE/PPPoA.
กรุณาป้อนUsername และ Password ที่ได้ลงทะเบียนไว้แล้ว เลือกรูปแบบการเชื่อมต่อ. คลิก NEXT เพื่อดำเนินการต่อไป

User Name:

Password:

Connection: AlwaysOn
 Manual

Note: "Always on" connection is suitable for Unlimited package.
"Manual" connection is suitable for Limited package.

หมายเหตุ: การเชื่อมต่อแบบ Always on เหมาะสำหรับผู้ใช้อินเตอร์เน็ตแบบไม่จำกัดชั่วโมง
การเชื่อมต่อแบบ Manual เหมาะสำหรับผู้ใช้อินเตอร์เน็ตแบบ รายชั่วโมง

6.1. Set up **Wireless**

- Enable: tick a check mark to enable Wireless
- SSID: enter name
- Channel: select preferred Channel
- Security Mode: WPA /WPA2+TKIP /AES
- Authentication Type: select only PSK
- Encryption Type: select as desired
- Confirmed Passphrase: enter the password of wireless, alphabets or numbers 8 digits up
- Once completed, press **Next**

Product Page : Wireless AC xDSL Modem Router (HV100-02) Site Map Firmware Version : V1.00.14B03



IEEE802.11ac Wireless LAN Router

WELCOME TO SETUP WIZARD

Wireless LAN Setup
การกำหนดค่าการใช้งาน Wireless LAN

WIRELESS BASIC SETTING

Enable

SSID

Channel →

Auto ▼
 Auto
 1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11

6.2. Security Mode: **WEP**

- Authentication Type: choose as desired
- Encryption: WEP 64-bit
- ASCII: enter 5 alphabets (0-9, a-f, A-F)
- Hex: enter 10 alphabets
- Encryption: WEP 128-bit
- ASCII: enter 13 alphabets (0-9, a-f, A-F)
- Hex: enter 26 alphabets
- Once completed, press **Next**

SECURITY CONFIGURATION

Security Mode WEP ▼

Authentication Type Auto Open System Shared Key

SECURITY ENCRYPTION (WEP) KEY

Encryption Strength 64bit ▼ → 64bit ▼

Key Format ASCII ▼ → ASCII ▼

Passphrase

Key 1

Key 2

Key 3


Key 4

6.3. Security Mode: select **None**, once completed, press **Next**

SECURITY CONFIGURATION

Security Mode None ▼

7. Press **Finish** to complete setting

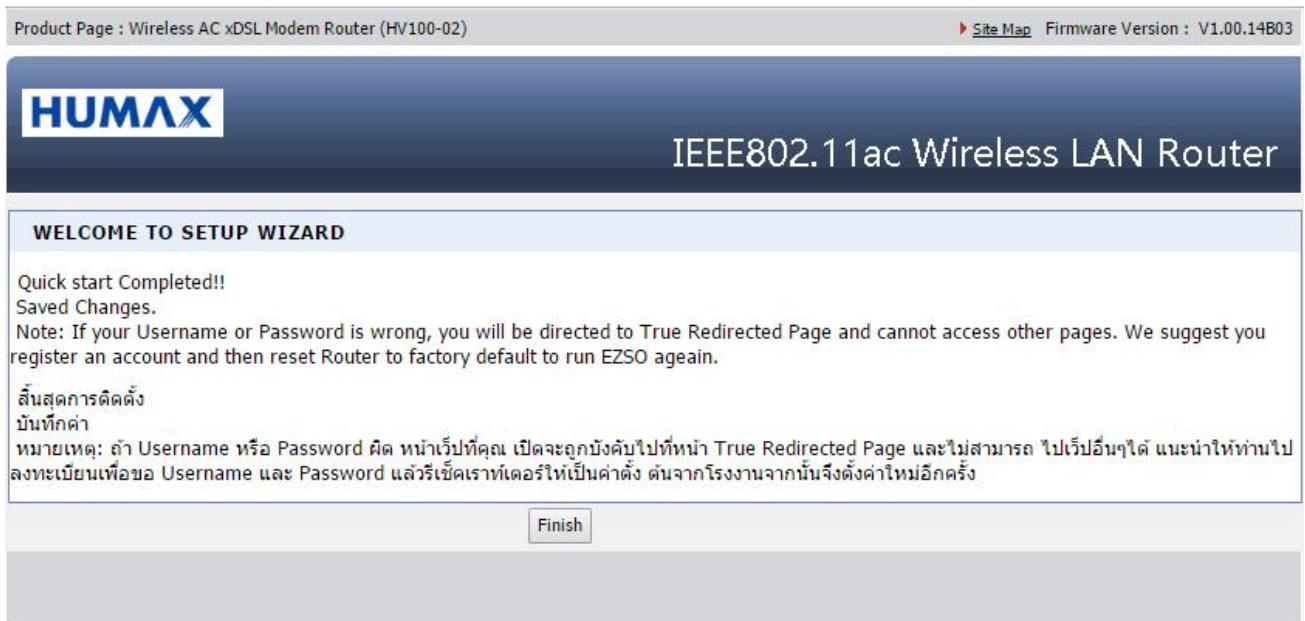

8. After that you'll find page welcome.truelife.com

