


การตั้งค่า MAC Filter Wireless สำหรับ ZTE F668

1. เปิด Browser พิมพ์ URL ไปที่ <http://192.168.1.1> ที่ช่อง Address กด Enter หลังจากนั้นจะขึ้นหน้าจอของ ZTE ให้พิมพ์ Username = **admin** และ Password = **password** จากนั้นกด **Login**

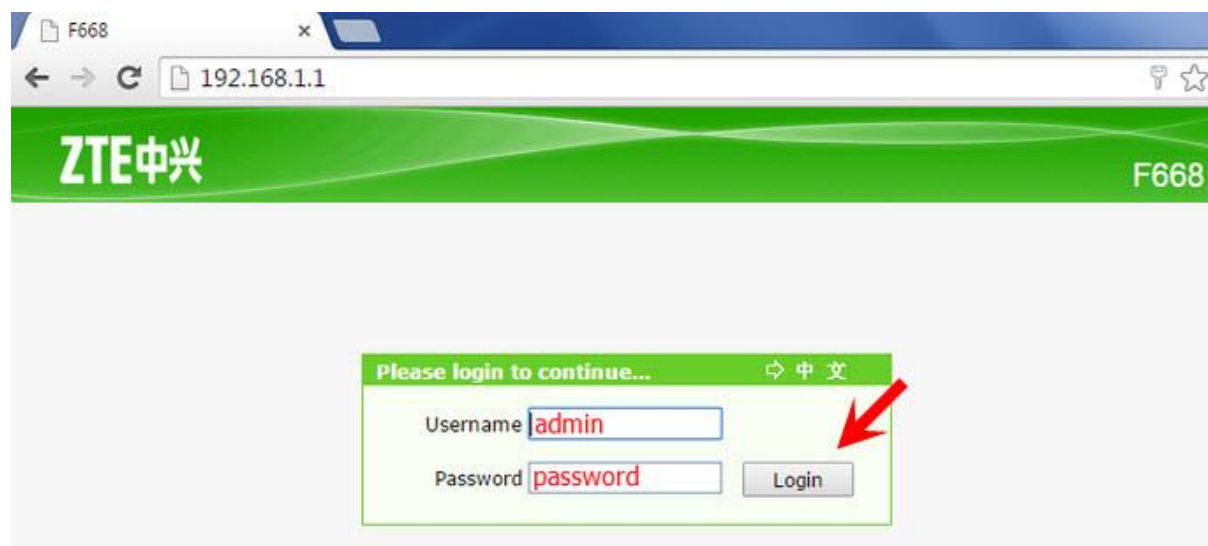

2. คลิกที่ **Network > WLAN > Access Control List** ตั้งค่าดังนี้ (Mode)

- **Disabled** = ปิดการ MAC Filter
- **Block** = ไม่อนุญาตให้ใช้งาน
- **Permit** = อนุญาตให้ใช้งาน

The screenshot shows the ZTE F668 router's web interface. The breadcrumb path is **Network > WLAN > Access Control List**. The page title is "Path:Network-WLAN-Access Control List" with language options for "中文" and a "Logout" link. A warning message states: "Mode switching will take effect immediately." Below this, there are configuration fields: "Choose SSID" set to "SSID1", "Mode" set to "Disabled" (highlighted in a red box), and "MAC Address" with an empty input field. A table below shows the current state of the Access Control List, which is empty.

SSID	MAC Address	Delete
There is no data, please add one first.		

©2008-2015 ZTE Corporation. All rights reserved.

3. ตัวอย่าง การตั้งค่า MAC Filter Wireless:

- ตั้งค่า **Mode = Permit** > หมายถึงอนุญาตให้ MAC Address ของอุปกรณ์ที่กรอกไว้ใช้งานได้เท่านั้น
- **MAC Address** = ค่า MAC Address ของอุปกรณ์ที่ต้องการให้ใช้งานได้
- กด **Add**

สรุปการตั้งค่าตามตัวอย่างนี้คือ จะใช้งานได้เฉพาะเครื่องที่ Add MAC Address ไว้เท่านั้น
 เครื่องอื่นที่มาเชื่อมต่อกับ Router จะใช้งานอินเทอร์เน็ตไม่ได้เลย

The screenshot shows the ZTE F668 router's web management interface. The page title is "Path:Network-WLAN-Access Control List". On the left is a navigation menu with categories like Status, Network, Security, and Application. The "Access Control List" option under the Network section is selected. The main content area displays a configuration form for adding a new MAC filter entry. It includes a warning icon and text: "Mode switching will take effect immediately." The form has three fields: "Choose SSID" (set to "SSID1"), "Mode" (set to "Permit"), and "MAC Address" (set to "88 : 79 : 7e : 58 : fe : cb"). Below these fields is a red-bordered "Add" button. Underneath the form is a table with columns for "SSID", "MAC Address", and "Delete". The table is currently empty, with a message below it stating "There is no data, please add one first." At the bottom of the page, there is a copyright notice: "©2008-2015 ZTE Corporation. All rights reserved."

4. เมื่อกด Add แล้ว จะพบข้อมูลขึ้นที่ตารางด้านล่าง

ZTE F668

Path: Network-WLAN-Access Control List [中文](#) [Logout](#)

+Status

-Network

- WLAN
 - Basic
 - SSID Settings
 - Security
 - Access Control List
 - Associated Devices
 - WDS
 - WMM
 - WiFi Restrictions
 - WPS
 - Surrounding WiFi
- +LAN
- +PON
- Port Locating
- +Security**
- +Application**
- +Administration**
- +Help**

Mode switching will take effect immediately.

Choose SSID:

Mode:

MAC Address: : : : : :

SSID	MAC Address	Delete
SSID1	88:79:7e:58:fe:cb	

©2008-2015 ZTE Corporation. All rights reserved.