


การตั้งค่า Forward Port สำหรับ AP D-link DIR-605L

1. เปิด Browser พิมพ์ 192.168.0.1 ในช่อง Address แล้วกด Enter



2. พิมพ์ password ในช่อง Password แล้วกด Login

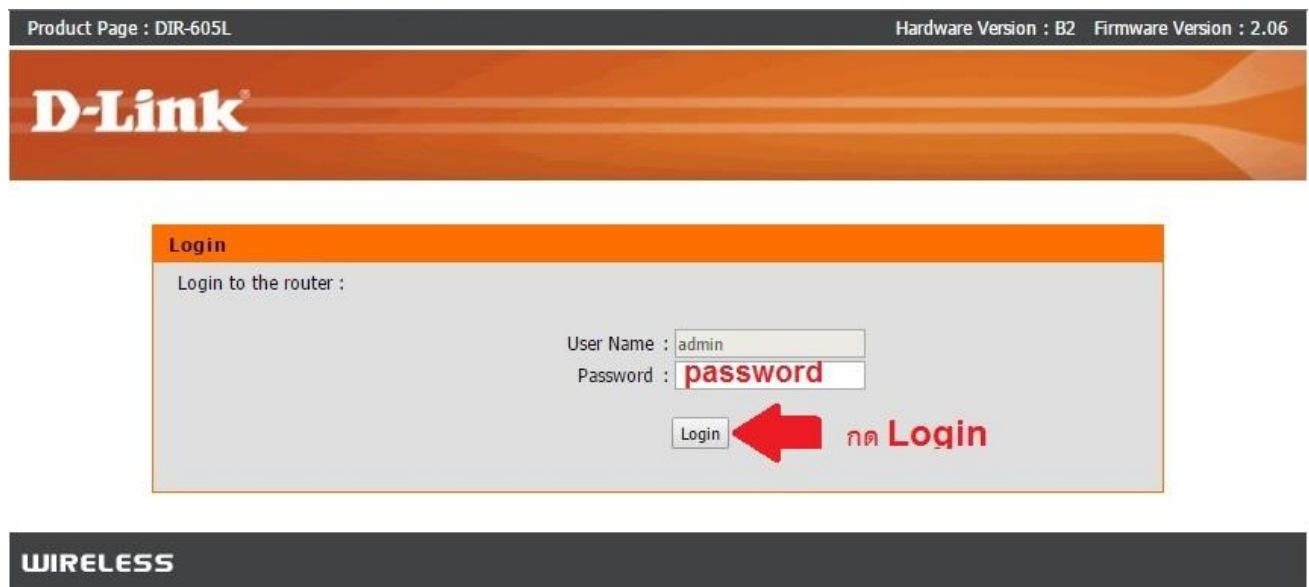

3. กดปุ่ม Advanced

CURRENT NETWORK SETTING

The current network settings and the connection status are displayed below. If you want to reconfigure your wireless settings, please click the "Configure" button. You can also enter advanced settings by clicking "Advanced". สถานะการเชื่อมต่อ **Internet**

Internet Settings

Internet Connection : Dynamic IP (DHCP) Status : **Connected**

Wireless Settings

Network Name (SSID) : CTCC_Docsis2 Status : **Encryption**

Security : Auto (WPA or WPA2) - Personal

Network Key : *****


Device Info

User Name : admin

Password : *****

mydlink Account

You have not activated mydlink service. Status : **Not Connected**

 กด **Advance**

4. เลือกเมนู Advanced

The screenshot shows the D-Link DIR-605L web interface. At the top, there is a navigation bar with the following tabs: SETUP, **ADVANCED**, MAINTENANCE, and STATUS. A red arrow points to the 'ADVANCED' tab, which is highlighted. Below the navigation bar, there is a sidebar menu on the left with options: Easy Setup, Internet Connection, Wireless Connection, LAN Setup, Time and Date, Parental Control Rules, and Logout. The main content area is titled 'INTERNET CONNECTION' and contains the following text: 'Use this section to configure your Internet Connection type. There are several connection types to choose from: Static IP, DHCP, PPPoE, PPTP, and L2TP. If you are unsure of your connection method, please contact your Internet Service Provider.' Below this text is a note: 'Note : If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.' At the bottom of this section are two buttons: 'Save Settings' and 'Don't Save Settings'. The next section is titled 'INTERNET CONNECTION TYPE' and contains the text: 'Choose the mode to be used by the router to connect to the Internet.' Below this text is a dropdown menu labeled 'My Internet Connection is :' with 'Dynamic IP (DHCP)' selected. The final section is titled 'DYNAMIC IP (DHCP) INTERNET CONNECTION TYPE' and contains the text: 'Use this Internet connection type if your Internet Service Provider (ISP) didn't provide you with IP Address information and/or a username and password.' Below this text are several input fields: 'Host Name : DIR-605L', 'MAC Address : 00 - 00 - 00 - 00 - 00 - 00' (optional), 'Copy Your PC's MAC Address' button, 'Primary DNS Server : 0.0.0.0', 'Secondary DNS Server : 0.0.0.0 (optional)', and 'MTU : 1500 bytes MTU default 1500'. At the bottom of this section are two buttons: 'Save Settings' and 'Don't Save Settings'.

5. เลือก **Advanced Port Forwarding Rules** ตั้งค่าตามรายการดังนี้ จากนั้นกด **Save Settings**

- ทำเครื่องหมายถูก Service ที่เปิดใช้งาน
- **Name** : ตั้งชื่อ Service ที่ใช้งาน เช่น CCTV
- **IP Address** : ใส่ IP address ของอุปกรณ์ที่ต้องการ Forward
- **Port** : ใส่ Port
- **Traffic Type** : เลือก Any

DIR-605L	SETUP	ADVANCED	MAINTENANCE	STATUS																														
Advanced Port Forwarding Rules	ADVANCED PORT FORWARDING RULES																																	
Application Rules	<p>The Advanced Port Forwarding option allows you to define a single public port on your router for redirection to an internal LAN IP Address and Private LAN port if required. This feature is useful for hosting online service such as FTP or Web Servers.</p>																																	
MAC Filtering	<p>Save Settings Settings ตั้งค่าเรียบร้อย กด Save Setting</p>																																	
ACL filter	<p>24--ADVANCED PORT FORWARDING RULES</p> <p>Remaining number of rules that can be created : 24 ใส่เครื่องหมายถูก</p> <table border="1"> <thead> <tr> <th></th> <th>Name</th> <th>IP Address</th> <th>Application Name</th> <th>Port</th> <th>Traffic Type</th> </tr> </thead> <tbody> <tr> <td><input checked="" type="checkbox"/></td> <td>CCTV</td> <td>192.168.0.2</td> <td><< Application Name</td> <td>Public Port 81 ~ 81 Private Port 81 ~ 81</td> <td>เลือก Any Any</td> </tr> <tr> <td><input type="checkbox"/></td> <td></td> <td></td> <td><< Application Name</td> <td>Public Port ~ ~</td> <td>Any</td> </tr> <tr> <td><input type="checkbox"/></td> <td></td> <td></td> <td><< Application Name</td> <td>Public Port ~ ~</td> <td>Any</td> </tr> <tr> <td><input type="checkbox"/></td> <td></td> <td></td> <td><< Application Name</td> <td>Public Port ~ ~</td> <td>Any</td> </tr> </tbody> </table> <p>ใส่ Port ใส่ IP Address ของอุปกรณ์ที่ต้องการ Forward</p>					Name	IP Address	Application Name	Port	Traffic Type	<input checked="" type="checkbox"/>	CCTV	192.168.0.2	<< Application Name	Public Port 81 ~ 81 Private Port 81 ~ 81	เลือก Any Any	<input type="checkbox"/>			<< Application Name	Public Port ~ ~	Any	<input type="checkbox"/>			<< Application Name	Public Port ~ ~	Any	<input type="checkbox"/>			<< Application Name	Public Port ~ ~	Any
	Name	IP Address	Application Name	Port	Traffic Type																													
<input checked="" type="checkbox"/>	CCTV	192.168.0.2	<< Application Name	Public Port 81 ~ 81 Private Port 81 ~ 81	เลือก Any Any																													
<input type="checkbox"/>			<< Application Name	Public Port ~ ~	Any																													
<input type="checkbox"/>			<< Application Name	Public Port ~ ~	Any																													
<input type="checkbox"/>			<< Application Name	Public Port ~ ~	Any																													
Traffic Control																																		
Firewall & DMZ																																		
Advanced Wireless Settings																																		
Advanced Network Settings																																		
Routing																																		
Logout																																		

6. กด Reboot Now

DIR-605L	SETUP	ADVANCED	MAINTENANCE	STATUS
Easy Setup	<div style="background-color: #f4a460; padding: 5px;">REBOOT NEEDED</div> <p>Your changes have been saved. The router must be rebooted for the changes to take effect. You can reboot now, or you can continue to make other changes and reboot later.</p> <div style="display: flex; justify-content: space-around;"> <input type="button" value="Reboot Now"/> <input type="button" value="Later"/> </div>			
Internet Connection				
Wireless Connection				
LAN Setup				
Time and Date				
Parental Control Rules				
Logout				

กด Reboot Now

7. รอ Router Reboot ประมาณ 10 วินาที

Product Page : DIR-605L Hardware Version : B2 Firmware Version : 2.06

D-Link

รอ Router Reboot ประมาณ 10 วินาที

REBOOTING...

Please wait 10 seconds

If you changed the IP address of the router you will need to change the IP address in your browser before accessing the configuration Web site again.

WIRELESS