
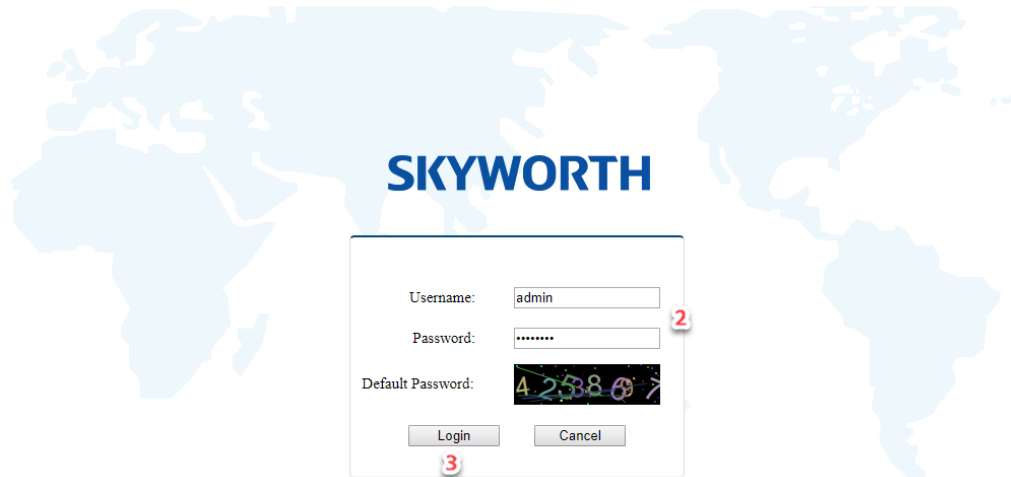


การตั้งค่า Dynamic DNS (DDNS) ของ Skyworth GN542VF

1. พิมพ์ 192.168.1.1 แล้วกด Enter

- User = admin
- Password = ใส่ตามรูปด้านล่าง
- กด Login



2. หน้า Application

The screenshot shows the SKYWORTH web interface. The top navigation bar includes 'Status', 'Network', 'Security', and 'Application', with 'Application' highlighted. Below the navigation bar, the 'Status' section is active, showing 'Device Info' and 'System Info' tabs. The 'Device Info' tab displays the following details:

Device Model:	GN542VF
TRUE SN:	SKYWFD167380
Manufacturer OUI:	001A9A
Hardware Version:	V2.0
Software Version:	V2.0.0.7
GPON SN:	SKYWFD167380
Compile Time:	2019-03-21 23:17:19

The 'System Info' tab displays the following details:

CPU Usage:	3 %
Memory Usage:	48 %
System up-time:	00:21:30

3. หน้า DDNS

The screenshot shows the SKYWORTH web interface with the 'Application' menu highlighted. The 'DDNS Configuration' page is displayed, featuring the following configuration options:

- Enable:
- Provider:
- Server:
- Port:
- Interface:
- Domain Name:
- User Name:
- Password:

Below the configuration fields is an 'Add' button. At the bottom of the page, there is a table with the following columns: DDNS Name, Interface, Enable, Protocol, Domain Name, User Name, Password, and Delete. A 'Delete' button is located below the table.

4. ตั้งค่า ดังนี้

- Enable ใส่เครื่องหมายถูก
- Provider เลือกผู้ให้บริการที่สมัครไว้
- Server ใช้ค่าเดิมไม่ต้องแก้
- Port เป็นค่าว่าง
- Interface เลือก 1_TR069_INTERNET_R_VID_100
- Domain Name ใส่ชื่อ Domain หรือ Host ที่ลูกค้าตั้งไว้กับผู้ให้บริการ
- Username และ Password ใส่ Username และ Password ที่ลูกค้าลงทะเบียนไว้กับผู้ให้บริการ
- กด Add

SKYWORTH Model: GN542VF Logout

Status Network Security **Application** Management

Application | DDNS | NAT | UPNP | GPON Configuration | CATV

DDNS Configuration

Enable: 1

Provider: 2

Server: 3

Port: 4

Interface: 5

Domain Name: 6

User Name: 7

Password: 7

8

DDNS Name	Interface	Enable	Protocol	Domain Name	User Name	Password	Delete

5. จะมีตารางแสดงข้อมูลที่เรากำลังค่าไว้ขึ้นมาด้านล่าง

The screenshot shows the SKYWORTH web interface for DDNS Configuration. The top navigation bar includes 'Status', 'Network', 'Security', 'Application', and 'Management'. The 'Application' menu is active, and the 'DDNS' sub-menu is selected. The main content area is titled 'DDNS Configuration' and contains the following fields:

- Enable:
- Provider:
- Server:
- Port:
- Interface:
- Domain Name:
- User Name:
- Password:

Below the form is an 'Add' button and a table of configured entries:

DDNS Name	Interface	Enable	Protocol	Domain Name	User Name	Password	Delete
dyndns.org	ppp0	Enable	GNUDip.http	demo.dyndns.org	demo	*****	<input type="checkbox"/>

At the bottom of the table is a 'Delete' button.