



## การตั้งค่าโหมด Access Point สำหรับ TP-Link Archer C9

1. การติดตั้งอุปกรณ์
  - 1.1. ต่อเสา Wireless เข้ากับตัวเครื่อง
  - 1.2. Wireless ปิดโมเด็มตัวหลัก
  - 1.3. ต่อสาย LAN จากโมเด็มตัวหลักไปที่ช่อง Internet ด้านหลังของ AP TP-Link Archer C9
  - 1.4. เปิดโมเด็มตัวหลัก
  - 1.5. เปิด AP TP-Link Archer C9

**หมายเหตุ:** เนื่องจาก AP TP-Link Archer C9 ถูกตั้งค่าเป็นโหมด Access Point มาจากโรงงานอยู่แล้ว หากทำการต่ออุปกรณ์ถูกต้อง จะสามารถใช้งานได้ทันที กรณีต้องการตรวจสอบการตั้งค่า ให้ดูตามข้อถัดไป

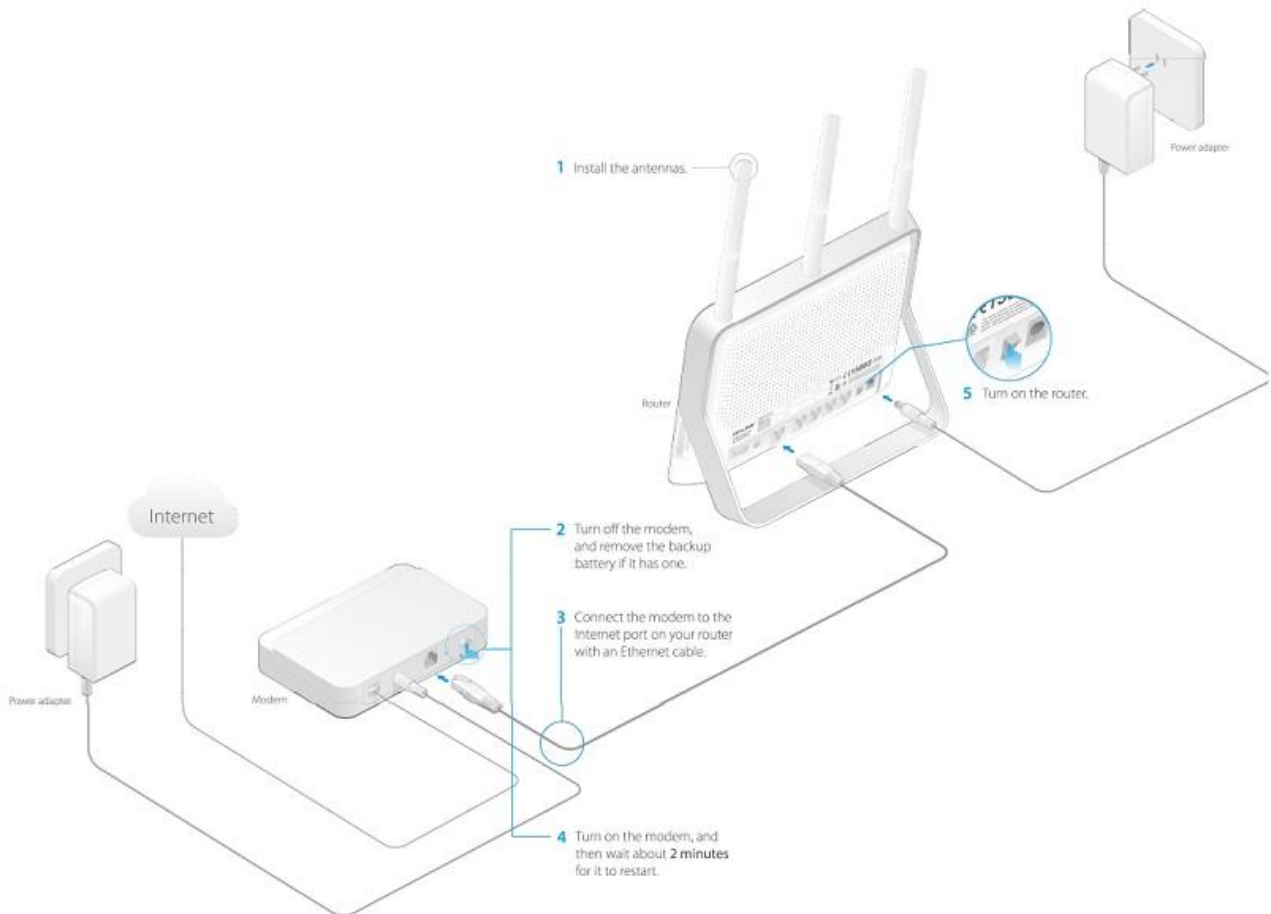

2. การตรวจสอบการตั้งค่า: พิมพ์ **192.168.0.1** ที่ช่อง Address ของ Browser แล้วกด **Enter**,  
พิมพ์ Username = **admin**, Password = **admin** จากนั้นกด **Login**

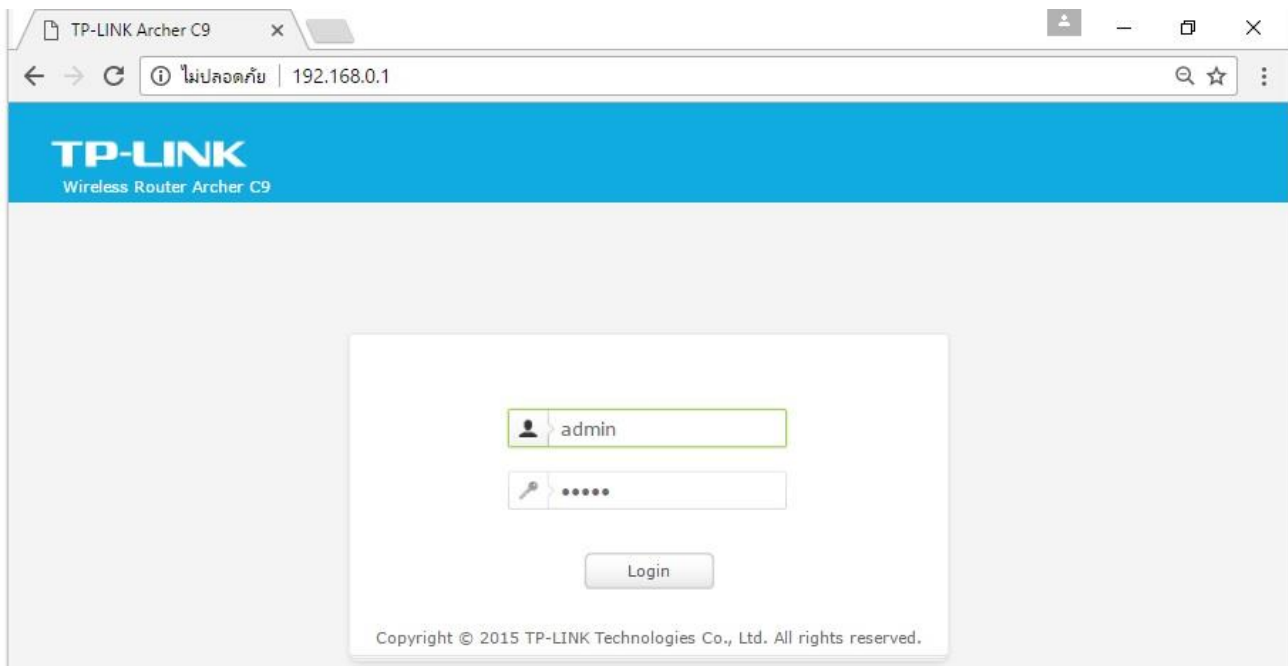

### 3. การตั้งค่าแบบ Quick Setup


#### 3.1. Region and Time zone

- Region : ไม่สามารถเปลี่ยนได้
- Time zone : เลือก Bangkok, Jakarta, Hanoi
- เสร็จแล้วกดปุ่ม Next



#### 3.2. WAN Connection Type

- เลือก Dynamic IP เสร็จแล้วกดปุ่ม Next

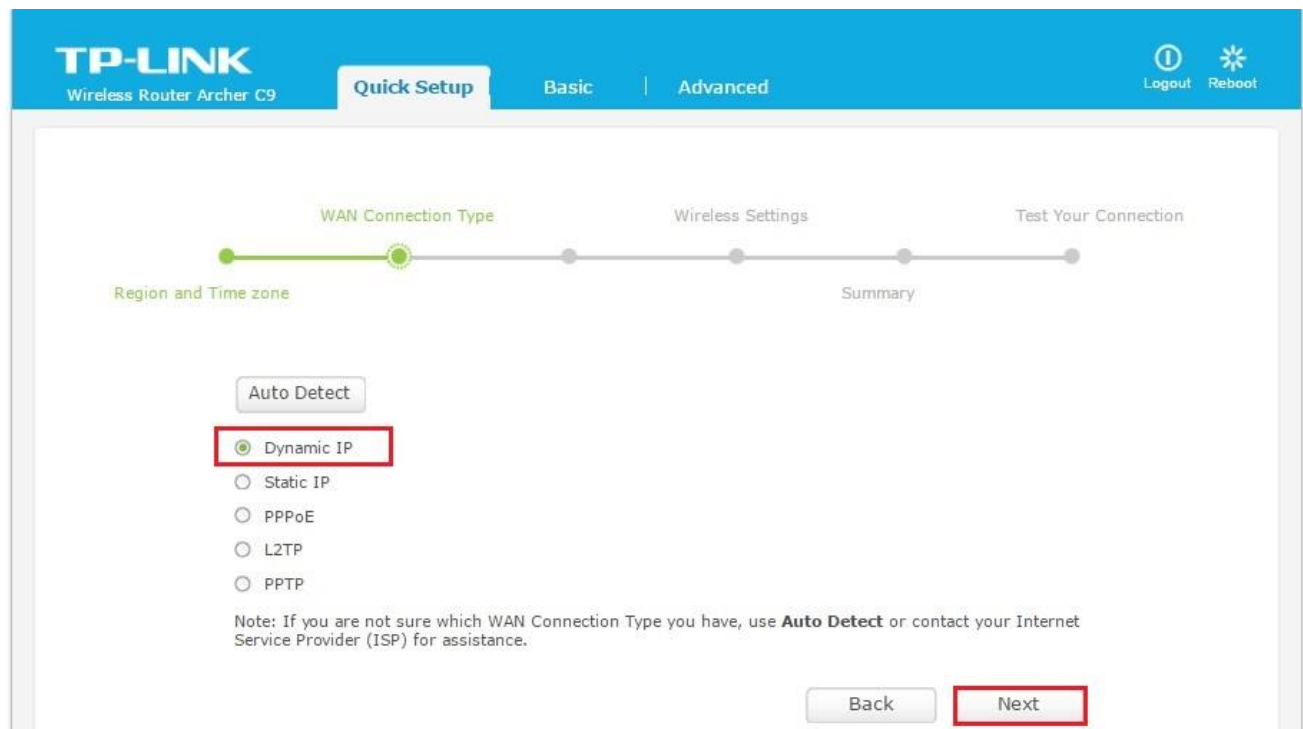

### 3.3. เลือก Do NOT clone Mac Address แล้วคลิกปุ่ม Next

The screenshot shows the TP-LINK Archer C9 Quick Setup interface. At the top, there is a blue header with the TP-LINK logo, 'Wireless Router Archer C9', and navigation tabs for 'Quick Setup', 'Basic', and 'Advanced'. On the right side of the header, there are 'Logout' and 'Reboot' buttons. Below the header, a progress bar indicates the current step is 'WAN Connection Type', with other steps being 'Region and Time zone', 'Wireless Settings', 'Summary', and 'Test Your Connection'. The main content area is titled 'WAN Connection Type - Dynamic IP'. It contains two paragraphs of text: 'If your ISP only delivers internet access to a specific MAC address, you may need to Clone that MAC Address to provide access to other devices.' and 'If you are not sure, select **Do NOT clone MAC Address**.' Below this text are two radio button options: 'Do NOT clone MAC Address' (which is selected and highlighted with a red box) and 'Clone MAC Address'. At the bottom right, there are 'Back' and 'Next' buttons, with the 'Next' button also highlighted with a red box.

TP-LINK  
Wireless Router Archer C9

Quick Setup | Basic | Advanced

Logout Reboot

Region and Time zone | WAN Connection Type | Wireless Settings | Summary | Test Your Connection

WAN Connection Type - Dynamic IP

If your ISP only delivers internet access to a specific MAC address, you may need to Clone that MAC Address to provide access to other devices.

If you are not sure, select **Do NOT clone MAC Address**.

Do NOT clone MAC Address

Clone MAC Address

Note: If you select **Clone MAC Address**, please make sure the MAC Address of this computer is registered with your ISP before clicking **Next**.

Back Next

### 3.4. Wireless Settings

- Wireless 2.4GHz, 5GHz : เลือก ON
- Network Name(SSID) : ตั้งชื่อสัญญาณที่ต้องการ
- Password : ตั้ง 8 ตัวขึ้นไป (การตั้งค่า Wireless แบบ Quick Setup จะเป็นการเข้ารหัสด้วย WPA/WPA2 Personal)
- เสร็จแล้วกดปุ่ม **Next**

The screenshot shows the TP-LINK Archer C9 Quick Setup interface. At the top, there are tabs for 'Quick Setup', 'Basic', and 'Advanced'. The 'Quick Setup' tab is active. Below the tabs, there is a progress bar with five steps: 'Region and Time zone', 'WAN Connection Type', 'Wireless Settings', 'Summary', and 'Test Your Connection'. The 'Wireless Settings' step is currently selected and highlighted in green. Below the progress bar, there are two sections for wireless configuration. The first section is for 'Wireless 2.4GHz', with a toggle switch set to 'ON'. Below it are input fields for 'Network Name(SSID)' containing 'TP-LINK\_1709' and 'Password' containing '16419643'. The second section is for 'Wireless 5GHz', also with a toggle switch set to 'ON'. Below it are input fields for 'Network Name(SSID)' containing 'TP-LINK\_1708\_5G' and 'Password' containing '16419643'. At the bottom right of the form, there are two buttons: 'Back' and 'Next'. The 'Next' button is highlighted with a red border.

### 3.5. Summary

- เป็นการสรุปผลการตั้งค่าตามที่เรากำหนดไว้ เสร็จแล้วกดปุ่ม **Save**

**TP-LINK**  
Wireless Router Archer C9

Quick Setup | Basic | Advanced

Logout Reboot

WAN Connection Type | Wireless Settings | Test Your Connection

Region and Time zone | Summary

**Region:** United States  
**Time zone:** (GMT+07:00) Bangkok, Jakarta, Hanoi  
**WAN Connection Type:** Dynamic IP


**Wireless 2.4GHz:** On  
**Network Name(SSID):** TP-LINK\_1709  
**Password:** 16419643

**Wireless 5GHz:** On  
**Network Name(SSID):** TP-LINK\_1708\_5G  
**Password:** 16419643

Back Save

### 3.6. Test Your Connection

- กดปุ่ม **Test Internet Connection** หน้าจอจะ ขึ้น Detecting สักครู่ แล้วแจ้งว่า **Success**
- เสร็จแล้วกดปุ่ม **Finish**

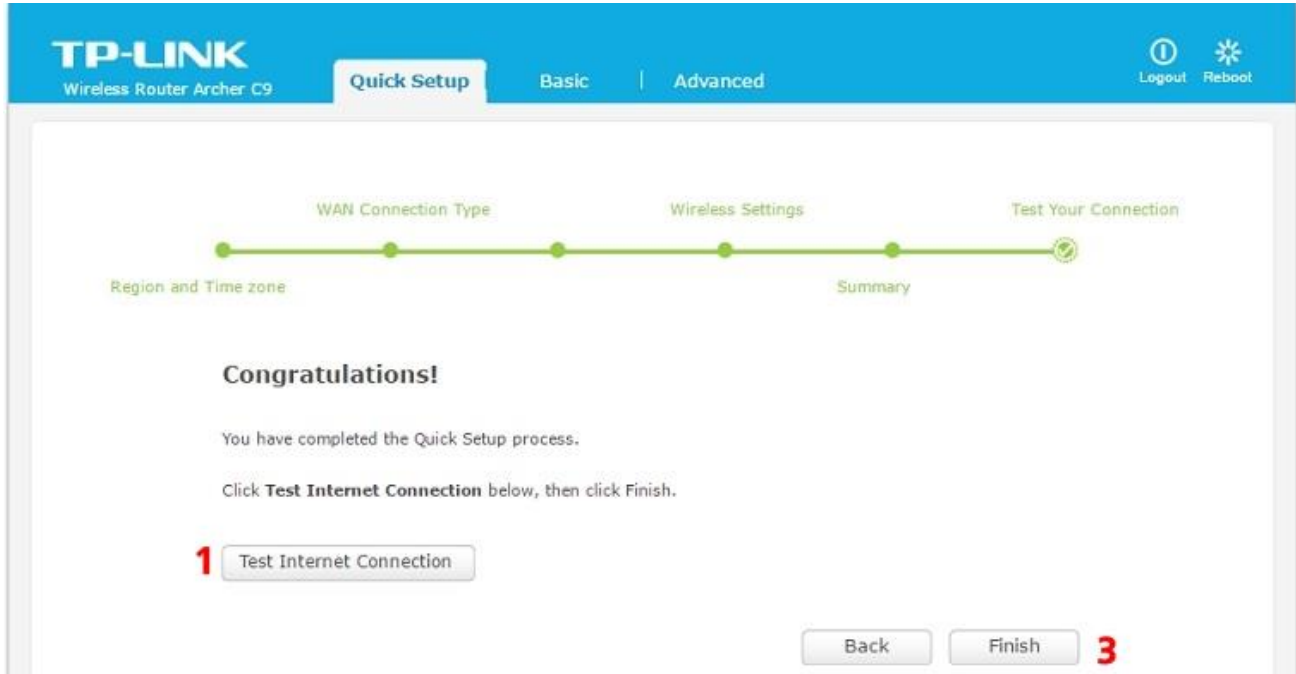

#### Congratulations!

You have completed the Quick Setup process.

Click **Test Internet Connection** below, then click .

#### Detecting... 2


We are detecting, please waiting for a moment.

#### Congratulations!

You have completed the Quick Setup process.

Click **Test Internet Connection** below, then click Finish.

#### Success!

Click **Finish** to end the Quick Setup process. 

### 3.7. หลังจากตั้งค่าแบบ Quick Setup เสร็จเรียบร้อย หน้าจอจะเปิดมาที่ Network Map

