


Set up Dynamic DNS for RAISECOM ISCOM HT803G-UA

1. Type **192.168.1.1** and press Enter, Username = **admin**, Password = **password** then press **Login**



User Login



User Name:

admin

Password:


Language Select:

English


Login

Rewrite

2. Select **Apply > DDNS Config**

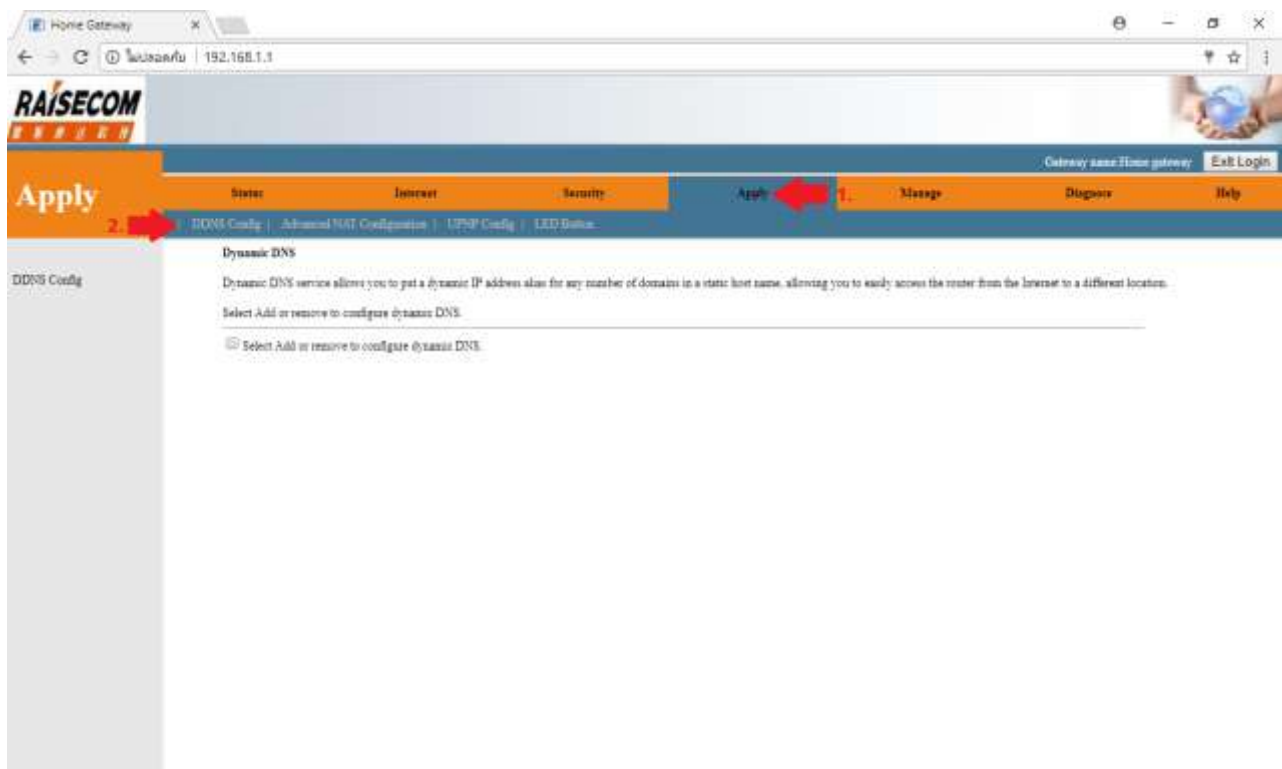


3. Place a check mark at **Select Add or remove to configure dynamic DNS** and press **Add**

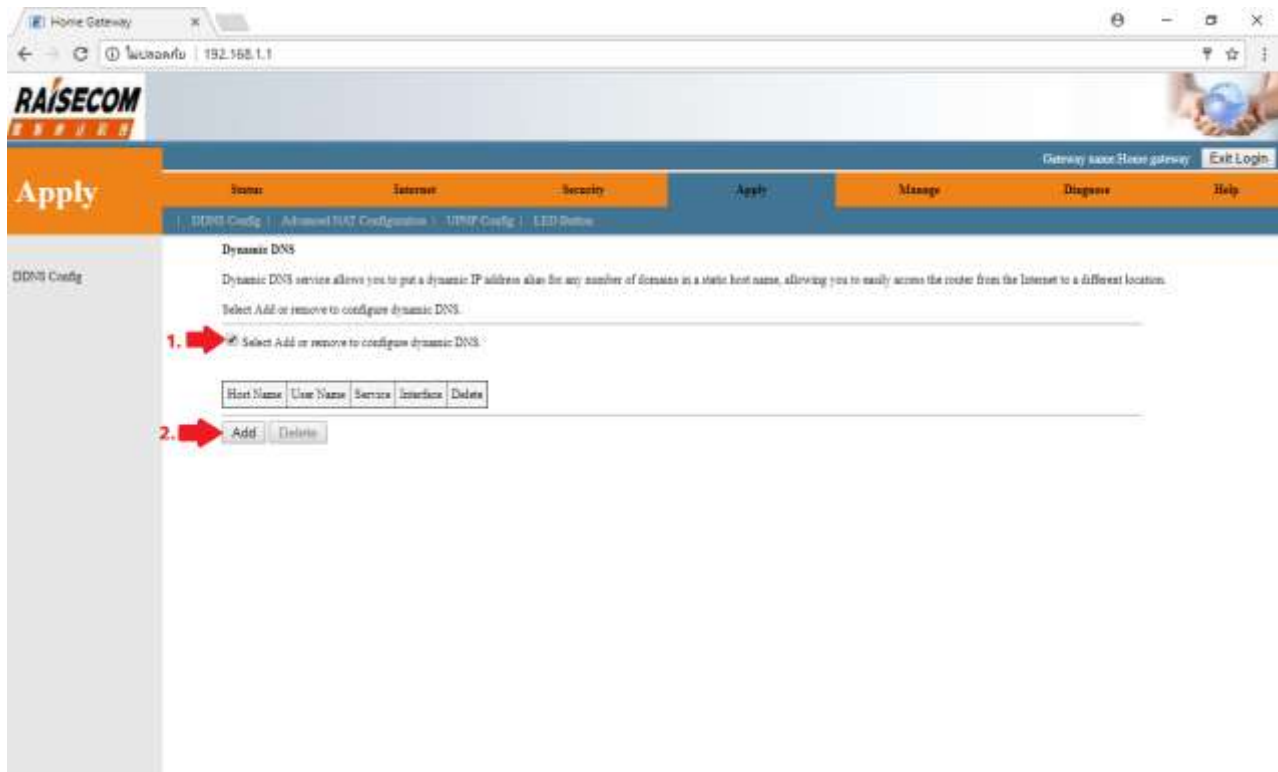

4. Check the settings as follows:

- **D-DNS Provider:** select the provider of Dynamic DNS
- **Host Name:** type Host name
- **Interface:** choose 1_TR069_INTERNET_R_VID_100
- **Username:** enter Username that apply for Dynamic DNS (Host)
- **Password:** enter the Password that apply for Dynamic DNS (Host)
- Press **Save/ application**

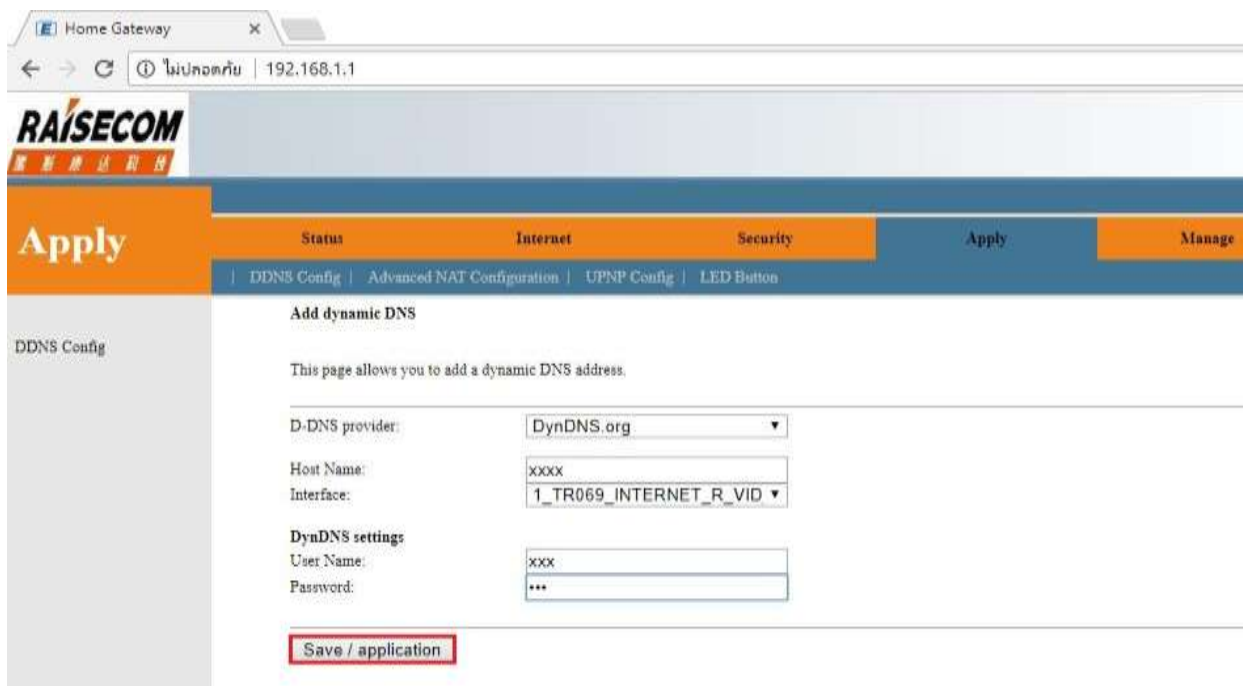

Home Gateway

192.168.1.1

RAISECOM

Apply Status Internet Security Apply Manage

DDNS Config

Add dynamic DNS

This page allows you to add a dynamic DNS address.

D-DNS provider: DynDNS.org

Host Name: xxxx

Interface: 1_TR069_INTERNET_R_VID

DynDNS settings

User Name: xxx

Password: ***

Save / application

5. At Dynamic DNS, there will be a table showing setup information



Apply Status Internet Security Apply Manage

DDNS Config

Dynamic DNS

Dynamic DNS service allows you to put a dynamic IP address alias for any number of domains in a static host name, allowing you to easily access the r

Select Add or remove to configure dynamic DNS.

☒ Select Add or remove to configure dynamic DNS.

Host Name	User Name	Service	Interface	Delete
xxxx	xxx	dyndns	1_TR069_INTERNET_R_VID_100	☐

Add **Delete**