


## การตั้งค่า WAN สำหรับ TP-Link Archer C9

1. พิมพ์ **192.168.0.1** ที่ช่อง Address ของ Browser แล้วกด **Enter**,  
พิมพ์ Username = **admin**, Password = **admin** จากนั้นกด **Login**

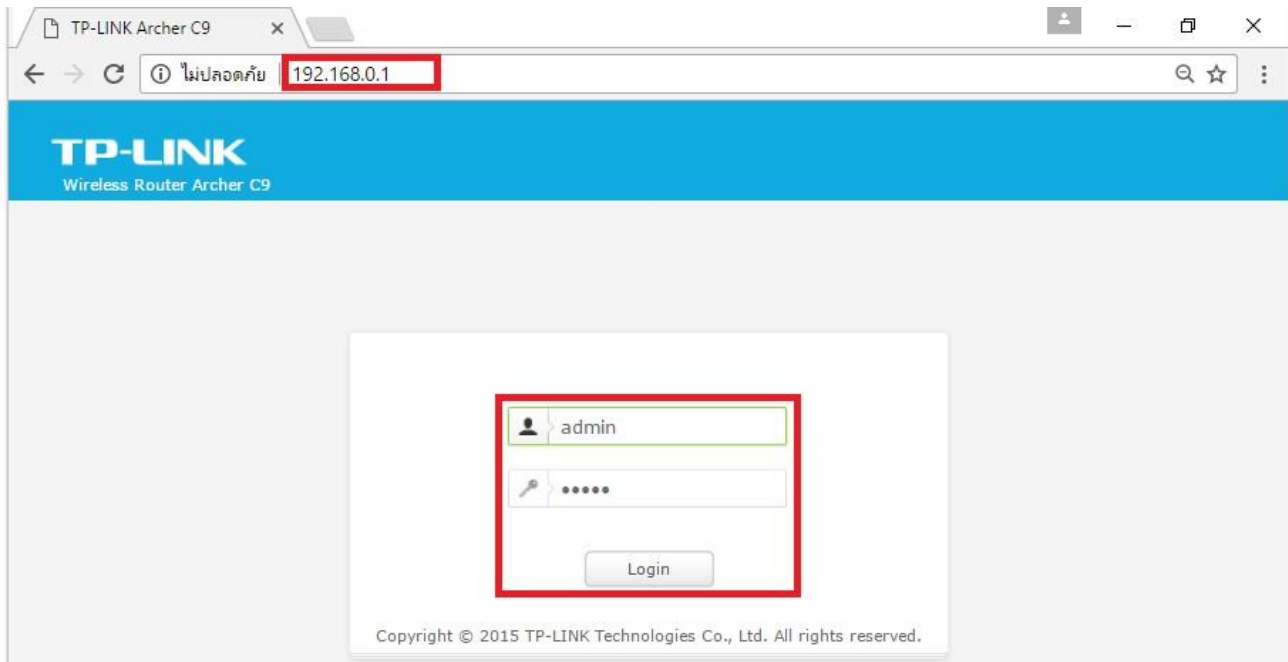

## 2. สามารถตั้งค่าได้ 2 แบบ ดังนี้

### 2.1. Basic : ไปที่ Basic > Internet

- WAN Connection Type : เลือก **Dynamic IP**
- ตัวเครื่องจะทำการรับค่า IP จากโมเด็มตัวหลัก และแสดงที่ IP Address, Subnet Mask, และ Default Gateway เสร็จแล้วกดปุ่ม **Save**

The screenshot shows the TP-LINK Archer C9 router's web interface. The 'Basic' tab is selected, and the 'Internet' section is highlighted. The 'WAN Connection Type' is set to 'Dynamic IP'. The IP Address is 192.168.1.35, Subnet Mask is 255.255.255.0, and Default Gateway is 192.168.1.1. There are buttons for 'Detect', 'Renew', and 'Release'. The 'Use These DNS Servers' checkbox is unchecked. The Primary DNS is 192.168.1.1 and the Secondary DNS is 0.0.0.0 (Optional). A 'Save' button is at the bottom right.

## 2.2. Advance : ไปที่ **Advanced** > **Network** > **WAN**

- WAN Connection Type : เลือก **Dynamic IP**
- ตัวเครื่องจะทำการรับค่า IP จากโมเด็มตัวหลัก และแสดงที่ IP Address, Subnet Mask, และ Default Gateway เสร็จแล้วกดปุ่ม **Save**

The screenshot displays the TP-LINK Archer C9 router's configuration interface. The top navigation bar includes 'Quick Setup', 'Basic', and 'Advanced' (highlighted). The left sidebar shows 'Network' selected, with sub-options for WAN, MAC Clone, and LAN. The main content area is titled 'WAN' and contains the following configuration fields:

- WAN Connection Type:** A dropdown menu set to 'Dynamic IP', with a 'Detect' button and 'Dynamic IP' text next to it.
- IP Address:** 192.168.1.35
- Subnet Mask:** 255.255.255.0
- Default Gateway:** 192.168.1.1, with 'Renew' and 'Release' buttons below it.
- MTU Size (in bytes):** 1500, with a note: '(The default is 1500, do not change unless necessary.)'
- Use These DNS Servers:** An unchecked checkbox.
- Primary DNS:** 192.168.1.1
- Secondary DNS:** 0.0.0.0 (Optional)
- Host Name:** Archer\_C9
- Get IP with Unicast DHCP (It is usually not required.):** An unchecked checkbox.

A 'Save' button is located at the bottom center of the configuration area.