


การตั้งค่า Dynamic DNS สำหรับ AP D-link DIR-605L

1. เปิด Browser พิมพ์ 192.168.0.1 ในช่อง Address แล้วกด Enter



2. พิมพ์ password ในช่อง Password แล้วกด Login

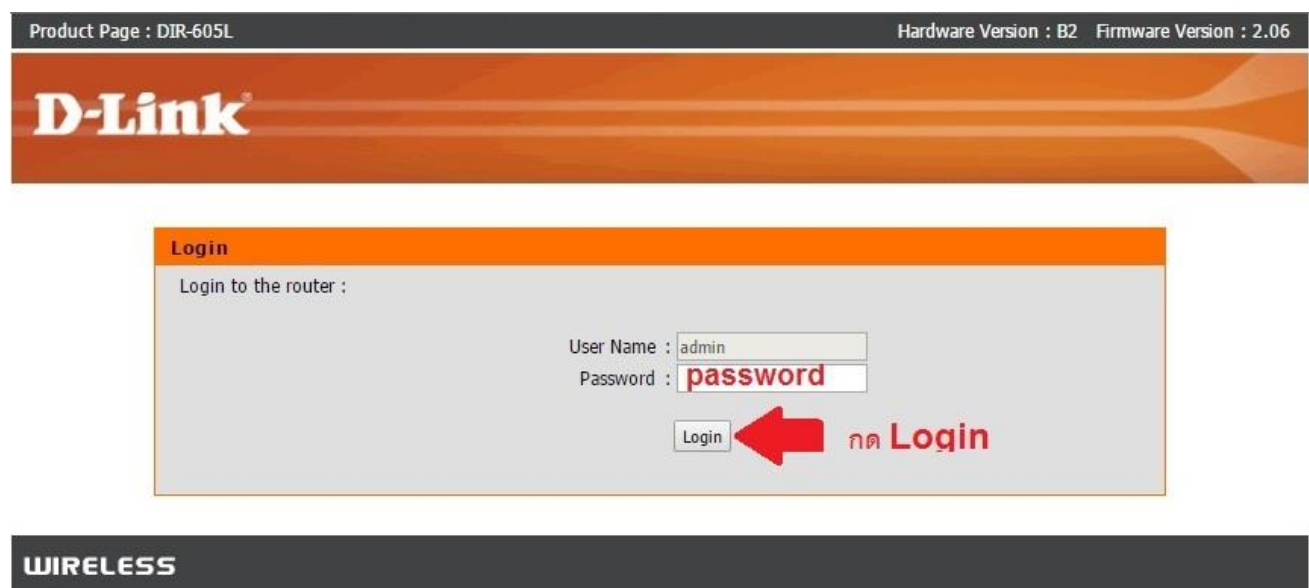

3. กดปุ่ม Advanced

CURRENT NETWORK SETTING

The current network settings and the connection status are displayed below. If you want to reconfigure your wireless settings, please click the "Configure" button. You can also enter advanced settings by clicking "Advanced". สถานะการเชื่อมต่อ **Internet**

Internet Settings

Internet Connection : Dynamic IP (DHCP) Status : **Connected**

Wireless Settings

Network Name (SSID) : CTCC_Docsis2 Status : **Encryption**

Security : Auto (WPA or WPA2) - Personal

Network Key : *****


Device Info

User Name : admin

Password : *****

mydlink Account

You have not activated mydlink service. Status : **Not Connected**

 กด **Advance**

4. เลือก Maintenance

DIR-605L	SETUP	ADVANCED	MAINTENANCE	STATUS
<ul style="list-style-type: none"> Easy Setup Internet Connection Wireless Connection LAN Setup Time and Date Parental Control Rules Logout 	<div style="background-color: #f4a460; padding: 5px; display: flex; justify-content: space-between;"> INTERNET CONNECTION เลือก Maintenance </div> <p>Use this section to configure your Internet Connection type. There are several connection types to choose from: Static IP, DHCP, PPPoE, PPTP, and L2TP. If you are unsure of your connection method, please contact your Internet Service Provider.</p> <p>Note : If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.</p> <div style="display: flex; justify-content: space-around;"> <input type="button" value="Save Settings"/> <input type="button" value="Don't Save Settings"/> </div>			
INTERNET CONNECTION TYPE				
<p>Choose the mode to be used by the router to connect to the Internet.</p> <p>My Internet Connection is : <input type="text" value="Dynamic IP (DHCP)"/></p>				
DYNAMIC IP (DHCP) INTERNET CONNECTION TYPE				
<p>Use this Internet connection type if your Internet Service Provider (ISP) didn't provide you with IP Address information and/or a username and password.</p> <p>Host Name : <input type="text" value="DIR-605L"/></p> <p>MAC Address : <input type="text" value="00"/> - <input type="text" value="00"/> - <input type="text" value="00"/> - <input type="text" value="00"/> - <input type="text" value="00"/> - <input type="text" value="00"/></p> <p>(optional) <input type="button" value="Copy Your PC's MAC Address"/></p> <p>Primary DNS Server : <input type="text" value="0.0.0.0"/></p> <p>Secondary DNS Server : <input type="text" value="0.0.0.0"/> (optional)</p> <p>MTU : <input type="text" value="1500"/> bytes MTU default 1500</p>				
<div style="display: flex; justify-content: space-around;"> <input type="button" value="Save Settings"/> <input type="button" value="Don't Save Settings"/> </div>				

5. เลือก **Dynamic DNS** > ทำเครื่องหมายถูกที่ **Enable DDNS** > จากนั้นคลิก **Dropdown**
เลือกผู้ให้บริการที่ลูกค้าใช้งาน และกดเครื่องหมาย <<

DIR-605L	SETUP	ADVANCED	MAINTENANCE	STATUS
Device Administration	DYNAMIC DNS			
Save and Restore Settings	The Dynamic DNS feature allows you to host a server (Web, FTP, Game Server, etc...) using a domain name that you have purchased (www.whateveryournameis.com) with your dynamically assigned IP address. Most broadband Internet Service Providers assign dynamic (changing) IP addresses. Using a DDNS service provider, your friends can enter your host name to connect to your server no matter what your IP address is.			
Firmware Update	<p>1.เลือก Dynamic DNS</p> <p>Save Settings Don't Save Settings</p>			
Dynamic DNS	<p>DYNAMIC DNS SETTINGS</p> <p>Enable DDNS : <input checked="" type="checkbox"/> 2.เลือก Enable DDNS</p> <p>Server Address : <input type="text"/> << 3.กด Dropdown เลือก ผู้ให้บริการที่ลูกค้าสมัครไว้ แล้วกด <<</p> <p>Host Name : <input type="text"/></p> <p>Username : <input type="text"/></p> <p>Password : <input type="password"/></p> <p>Timeout : <input type="text"/> 567 Hour</p> <p>Status : Disconnected</p>			
System Check				
Schedule				
Log Settings				
Logout				

6. ตั้งค่าตามรายการดังนี้ จากนั้นกด **Save Settings**

- **Host Name** : ใส่ Host ที่ลูกค้าตั้งไว้
- **Username** : ใส่ Username ที่ลูกค้าสมัครบริการไว้
- **Password** : ใส่ Password ที่ลูกค้าสมัครบริการไว้

DIR-605L	SETUP	ADVANCED	MAINTENANCE	STATUS	
Device Administration	DYNAMIC DNS				Helpful Hints... To use this feature, you must first have a Dynamic DNS account from one of the providers in the drop down menu.
Save and Restore Settings	The Dynamic DNS feature allows you to host a server (Web, FTP, Game Server, etc...) using a domain name that you have purchased (www.whateveryournameis.com) with your dynamically assigned IP address. Most broadband Internet Service Providers assign dynamic (changing) IP addresses. Using a DDNS service provider, your friends can enter your host name to connect to your game server no matter what your IP address is.				
Firmware Update	ตั้งค่าเรียบร้อยแล้ว Save Setting				
Dynamic DNS	Save Settings Settings				
System Check	DYNAMIC DNS SETTINGS				
Schedule	Enable DDNS : <input checked="" type="checkbox"/>				
Log Settings	Server Address : <input type="text" value="dyndns.com"/> << <input type="text" value="dyndns.com"/>				
Logout	Host Name : ใส่ Host ที่ลูกค้าตั้งไว้				
	Username : ใส่ Username ที่ลูกค้าสมัครบริการไว้				
	Password : ใส่ Password ที่ลูกค้าสมัครบริการไว้				
	Timeout : <input type="text" value="567"/> Hour Status : Disconnected				

7. กด **Reboot Now**

DIR-605L	SETUP	ADVANCED	MAINTENANCE	STATUS
Easy Setup	REBOOT NEEDED			
Internet Connection	Your changes have been saved. The router must be rebooted for the changes to take effect. You can reboot now, or you can continue to make other changes and reboot later.			
Wireless Connection	Reboot Now later			
LAN Setup	กด Reboot Now			
Time and Date				
Parental Control Rules				
Logout				

8. รอ Router Reboot ประมาณ 10 วินาที

Product Page : DIR-605L Hardware Version : B2 Firmware Version : 2.06

รอ Router Reboot ประมาณ 10 วินาที

REBOOTING...

Please wait 10 seconds

If you changed the IP address of the router you will need to change the IP address in your browser before accessing the configuration Web site again.

WIRELESS

9. ตรวจสอบ Status : **Connected** แสดงว่าสามารถใช้งานได้แล้ว

DIR-605L	SETUP	ADVANCED	MAINTENANCE	STATUS
Device Administration	DYNAMIC DNS			
Save and Restore Settings	The Dynamic DNS feature allows you to host a server (Web, FTP, Game Server, etc...) using a domain name that you have purchased (www.whateveryournameis.com) with your dynamically assigned IP address. Most broadband Internet Service Providers assign dynamic (changing) IP addresses. Using a DDNS service provider, your friends can enter your host name to connect to your game server no matter what your IP address is.			
Firmware Update	<input type="button" value="Save Settings"/> <input type="button" value="Don't Save Settings"/>			
Dynamic DNS	DYNAMIC DNS SETTINGS			
System Check	Enable DDNS : <input checked="" type="checkbox"/>			
Schedule	Server Address : <input type="text" value="dyndns.com"/> << <input type="text" value="dyndns.com"/>			
Log Settings	Host Name : <input type="text" value=""/>			
Logout	Username : <input type="text" value=""/>			
	Password : <input type="password" value=""/>			
	Timeout : <input type="text" value="567"/>			
	<input type="text" value="Status : Connected"/>			

Status = Connected แสดงว่าสามารถใช้งานได้แล้ว