

Switch Mode on True IoT Router WiFi


1. Notice at the bottom of True IoT Router WiFi, there'll be a sticker shows device connection information

- Device Manager Website : <http://192.168.0.1>
- Website User Name : **admin**
- Website Password : **password**

remarks : default setting




2. Connect Wi-Fi to True IoT Router WiFi

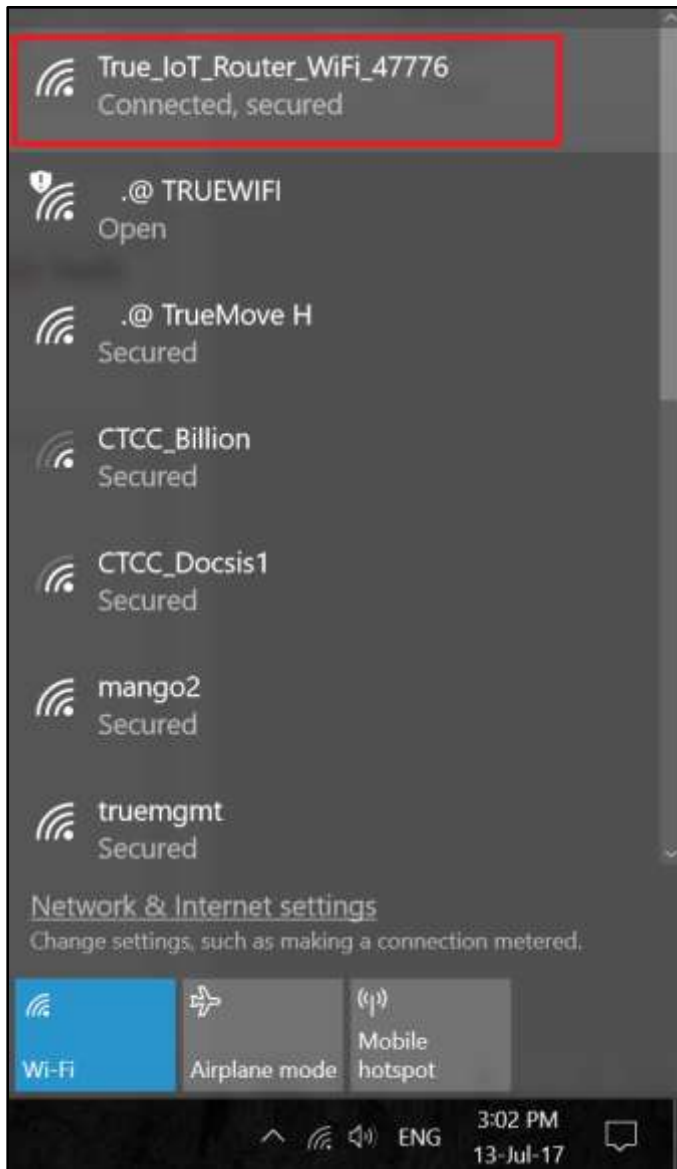


3. Choose Web Browser (example : Google Chrome)




4. Page to access Website

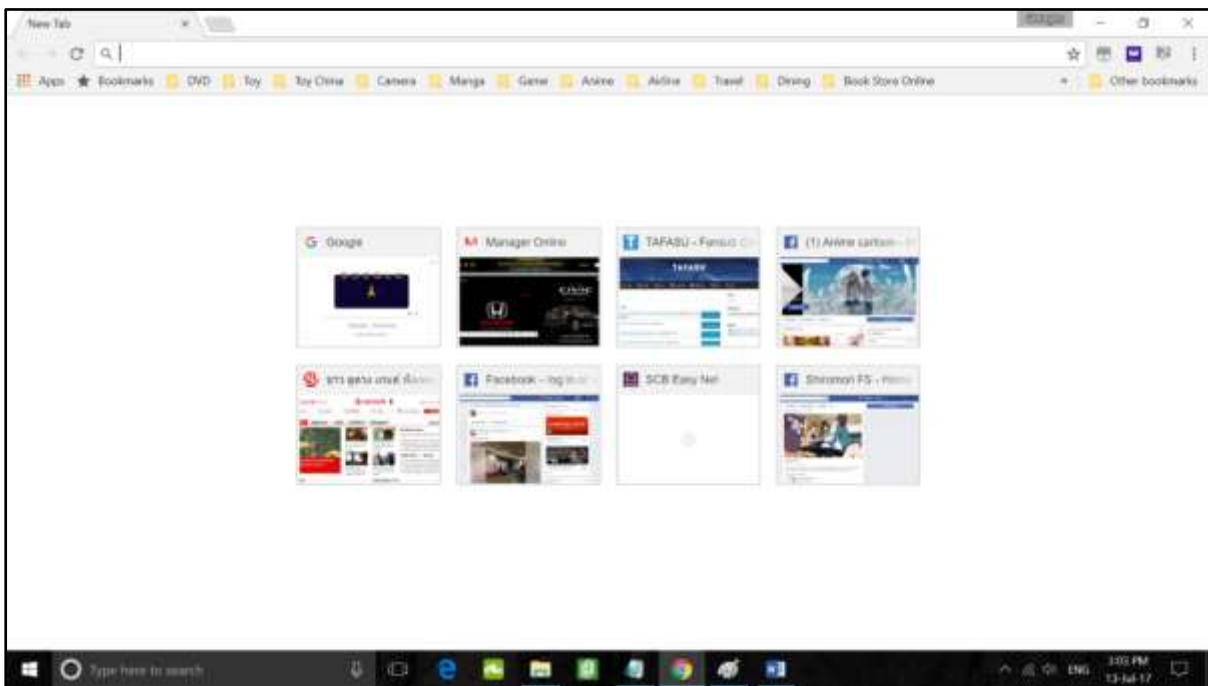


5. Type <http://192.168.0.1> in URL

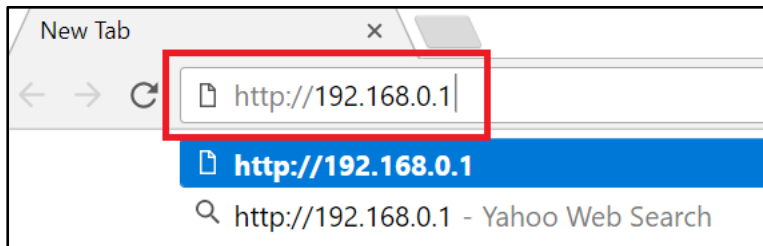

6. Wait a moment, a Login Page will appear

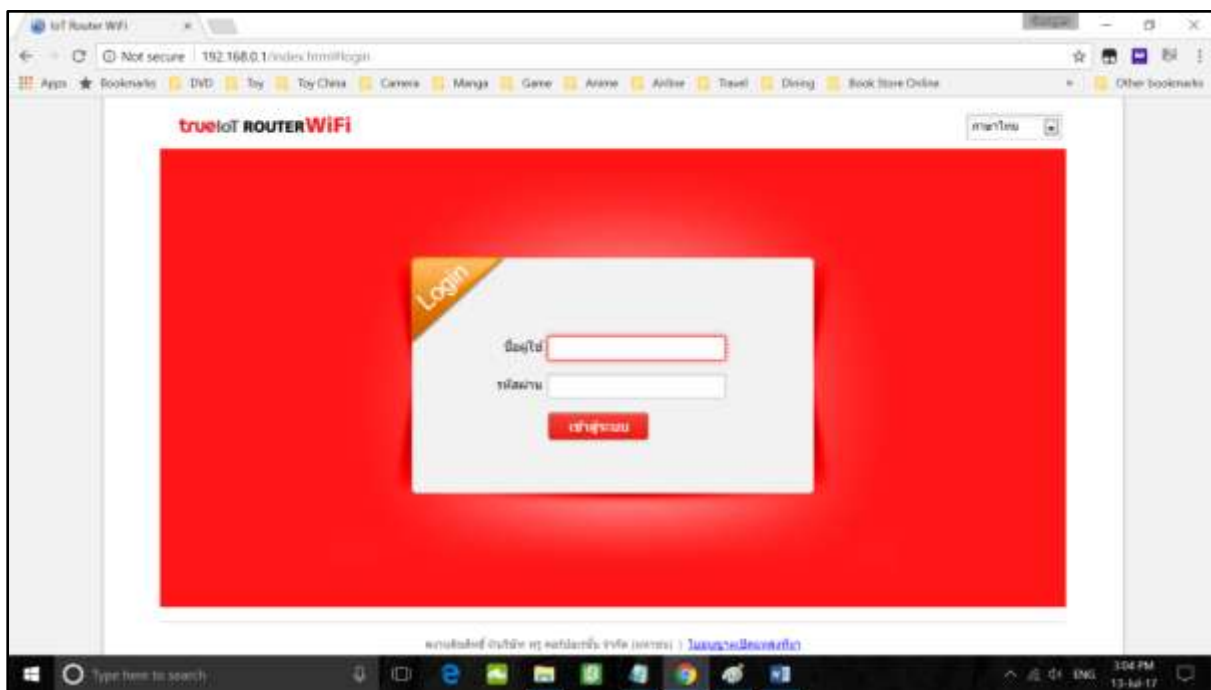


7. To change language, at top right corner, choose Thai or English

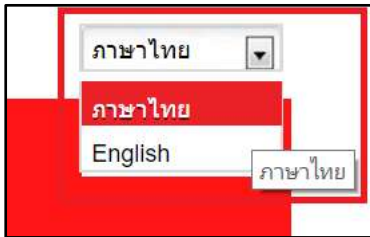

8. Enter Username = **admin** / Password = **password** and press **Login**



9. Configuration Page of True IoT Router WiFi will be at Home page

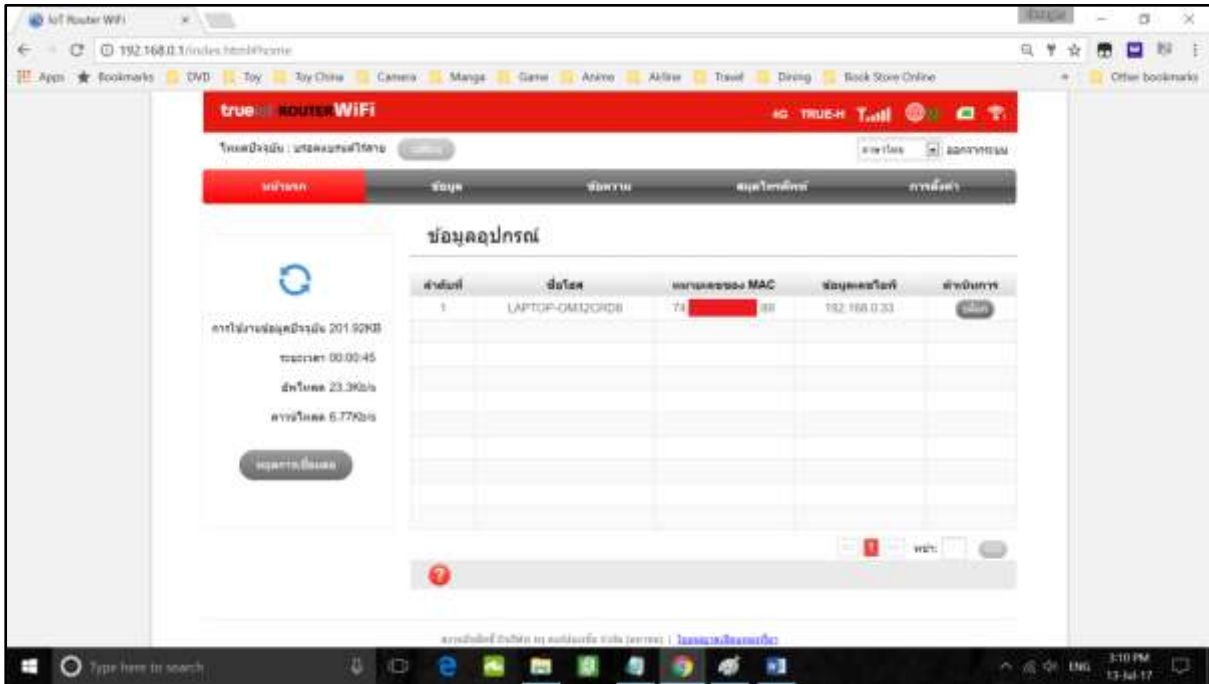

10. On the left : **Disconnect** = to disconnect the Internet => click this


if choose Disconnect, data will re-start to the beginning

11. Disconnecting...

12. Once completed, Success message will show on top center



13. Current Mode : Wireless Broadband > press Change

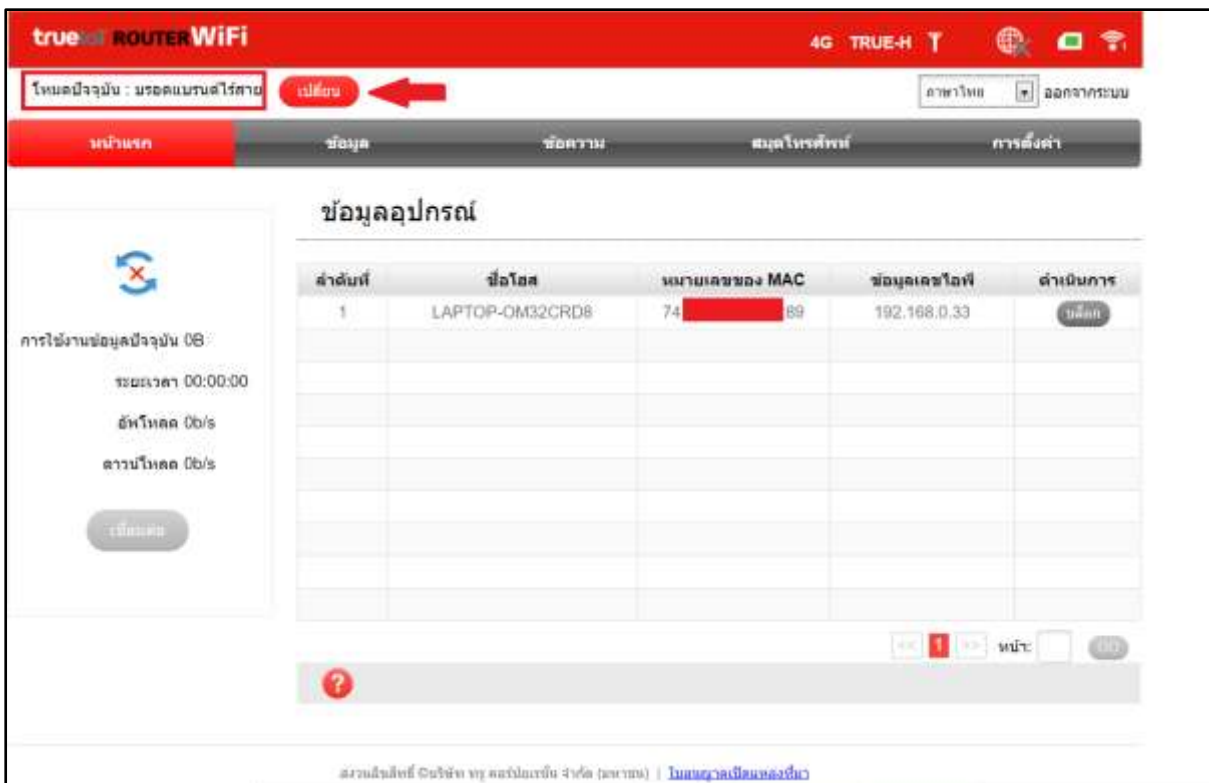


14. **Operation Mode** : 2 options are Cable Broadband and Wireless Broadband (default)

15. Then select **Cable Broadband** and press **Apply**


16. A popup to **Confirm** : The Device will be restarted when operation mode is changed, choose **Yes**

17. Device will be restarted > Wi-Fi disconnected > wait for device to connect Wi-Fi again
> back to configuration page > Home page

- Current Mode : Cable Broadband
- Globe sign has a cross (Internet disconnected)
- Wi-Fi icon (fan) has an exclamation mark (can connect Wi-Fi, but no Internet network)

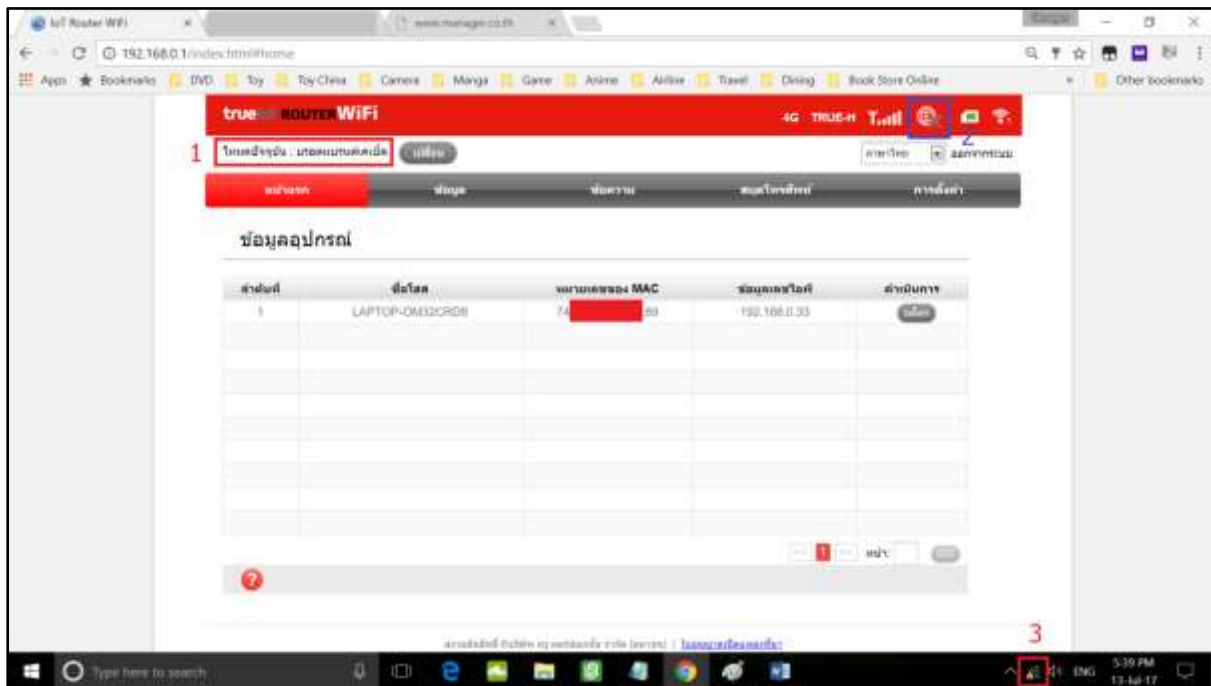

18. Try to access a Web Browser > unable to use because there's no Internet connection

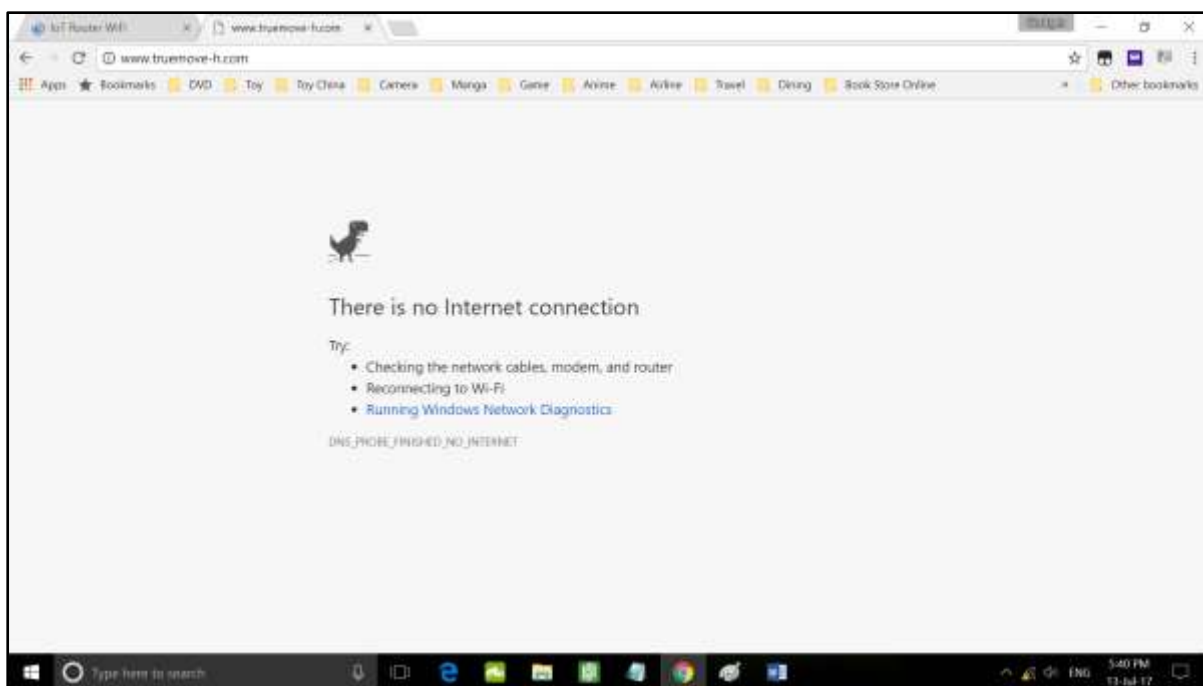

19. Go to Settings > Network Settings > Dial-up Settings




20. At WAN Connection Mode, the options for connection mode are

- remarks :** 1. Need to completely set up so the internet can be used,
 2. WAN = Internet connection via WAN or telephone cable (like ADSL)



21. **Addition** : to change Operation Mode can be done when the modem is disconnected then can proceed as per example A and B

- **Example A** : at Home page > Change > button is grey **Unchangeable**

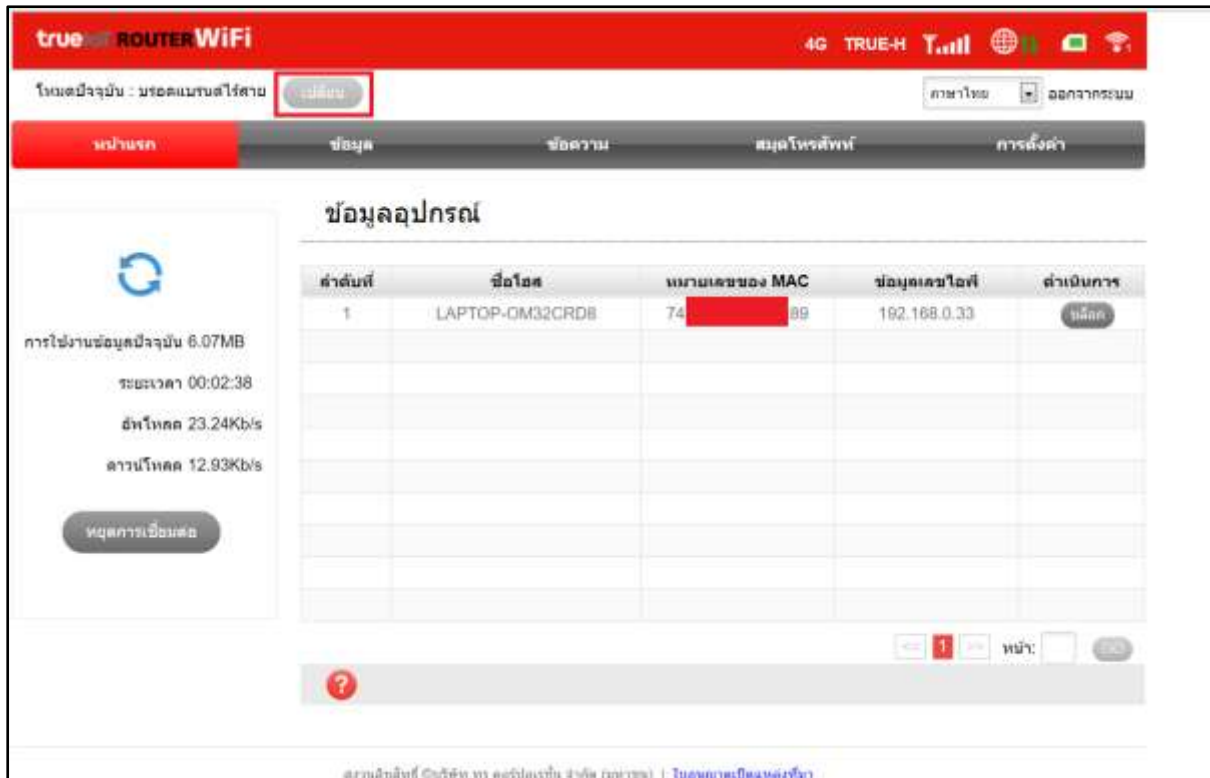

- **Example B:** go to **Settings > Network Settings > Dial-up Settings > WAN Connection Mode > automatic (default)**, cannot manually set. A button is grey. The setting can only be changed when the internet is disconnected.

