


การตั้งค่า LAN และ WAN สำหรับ HUMAX HG100RE

1. พิมพ์ **192.168.1.1** แล้วกด **Enter** แล้วพิมพ์ Username = **admin**, Password = **password**
แล้วคลิก **Login**

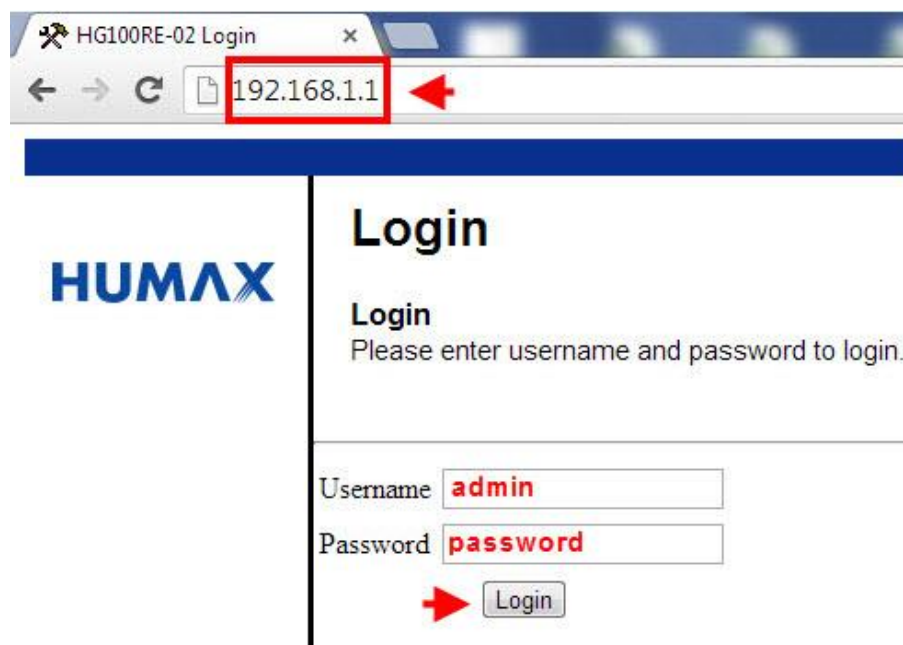

2. คลิกที่เมนู Basic ด้านบน > คลิกที่เมนู Setup ด้านซ้ายจะแสดงหน้า Basic Setup มีรายละเอียดดังนี้

LAN

- IP Address > ตั้งค่า IP Gateway ในกรณีเข้าหน้า Config Router Modem
- DNS Server > เป็นค่า Proxy DNS โดยสามารถเปลี่ยนค่า DNS ตัวอื่นได้ เช่น DNS Google 8.8.8.8

WAN : แสดงรายละเอียดต่าง ๆ เช่น IP Wan ที่ได้รับ, DNS ที่ได้รับ

The screenshot shows the HUMAN router's web interface. At the top, there are navigation tabs: Status, Basic (highlighted with a red box and arrow), Advanced, Firewall, and Parental Control. On the left side, there is a vertical menu with buttons for Setup (highlighted with a red arrow), DHCP, DDNS, SNTP, and Backup. The main content area is titled 'Basic' and contains a 'Setup' button with a 'HELP' link. Below this is the 'Network Configuration' section, which is divided into 'LAN' and 'WAN' settings.

LAN Configuration:

- IP Address: 192 . 168 . 1 . 1
- Subnet Mask: 255 . 255 . 255 . 0
- MAC Address: 08:eb:74:70:09:11
- DNS Servers: 192 . 168 . 1 . 1

WAN Configuration:

- IP Address: 10.89.250.133
- Gateway: 10.89.250.129
- MAC Address: 08:eb:74:70:09:0f
- Duration: D: 05 H: 19 M: 20 S: 59
- Expires: Tue Nov 19 10:02:16 2013
- Remaining Time: D: 05 H: 19 M: 02 S: 02
- IPv4 DNS Servers: 203.144.207.29, 203.144.207.49

Below the WAN settings, there are buttons for 'Release WAN Lease' and 'Renew WAN Lease'. At the bottom, there is a 'WAN Connection Type' dropdown menu set to 'DHCP' and an 'Ipv4 MTU Size' input field set to '0' (with a note '(256-1500 octets, 0 = use default)'). A red arrow points to the 'Apply' button at the bottom right.

3. คลิกที่เมนู Basic ด้านบน > คลิกที่เมนู DHCP ด้านซ้ายจะแสดงหน้า Basic DHCP ก็จะสามารถตั้งค่า DHCP ได้ดังรูป รวมถึงสามารถลบ Client ที่ใช้งานอยู่ ได้ด้วย

HUMANX

Setup
DHCP
 DDNS
 SNTP
 Backup

Basic

DHCP [HELP](#)

DHCP Server Yes No

Starting Local Address

Number of CPEs

Lease Time

[Apply](#)

DHCP Clients

MAC Address	IP Address	Subnet Mask	Duration	Expires	Select
5cf9dd4ddd4c	192.168.001.034	255.255.255.000	D:01 H:00 M:00 S:00	Thu Nov 14 14:43:33 2013	<input type="checkbox"/>

Current System Time: Wed Nov 13 15:02:50 2013

[Force Available](#)