


## การตั้งค่า Wireless สำหรับ RAISECOM ISCOM HT803G-W-05

1. พิมพ์ 192.168.1.1 ที่ช่อง Address ของ Browser จากนั้นกด Enter

- **User Administration** (ไม่สามารถเปลี่ยน CH Wireless ได้)
  - **User Name:** useradmin
  - **password:** useradmin
- **Super Administration** (สามารถเปลี่ยน CH Wireless ได้)
  - **User Name:** superadmin
  - **password:** q!w@e#

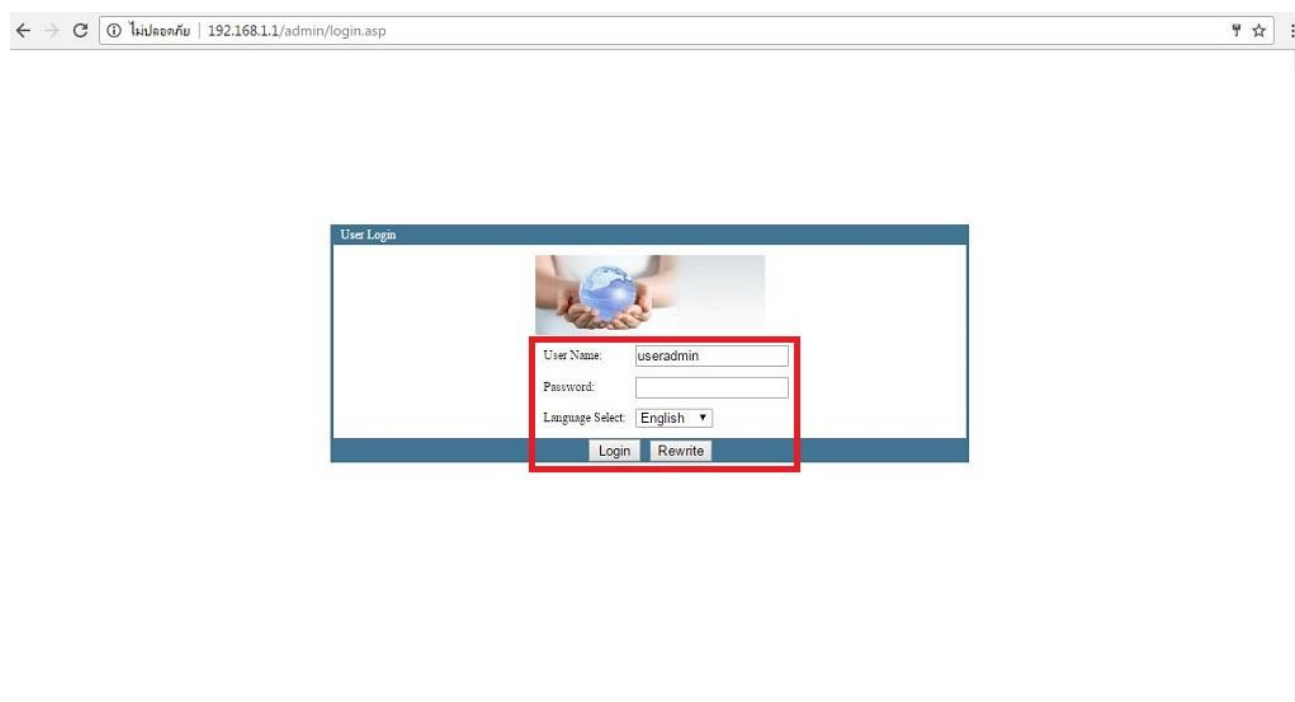

## 2. เมื่อ Login เรียบร้อย จะเข้าสู่หน้า Status

Browser address bar: 192.168.1.1

RAISECOM logo and navigation menu: Status, Internet, Safety, Manage, Help

Sub-menu: Device Info, Wan Info, User Info, Voip Info

Gateway name: Home gateway | Exit Login


Basic Device Info

Device Basic Info	
Device Model	HT803G-W
Device Serial Number	000E5E-01ZBA000E5E84C389
Hardware Version	T.00
Software Version	3.0.10
Version Date	20170123
CPU Usage	18%
Memory Usage	62.39%

### 3. แถบเมนูด้านบน เลือก **Internet > Wlan > แถบเมนูซ้ายมือ เลือก Wlan Config**

#### 3.1. สำหรับ **User Administration** (ไม่สามารถเปลี่ยน CH Wireless ได้)

- Enable WLAN Interface: เปิด-ปิด Function WLAN
- SSID: ตั้งชื่อสัญญาณ Wireless
- BSSID: MAC ของ WLAN Router
- Hidden AP: ซ่อนชื่อสัญญาณ Wireless

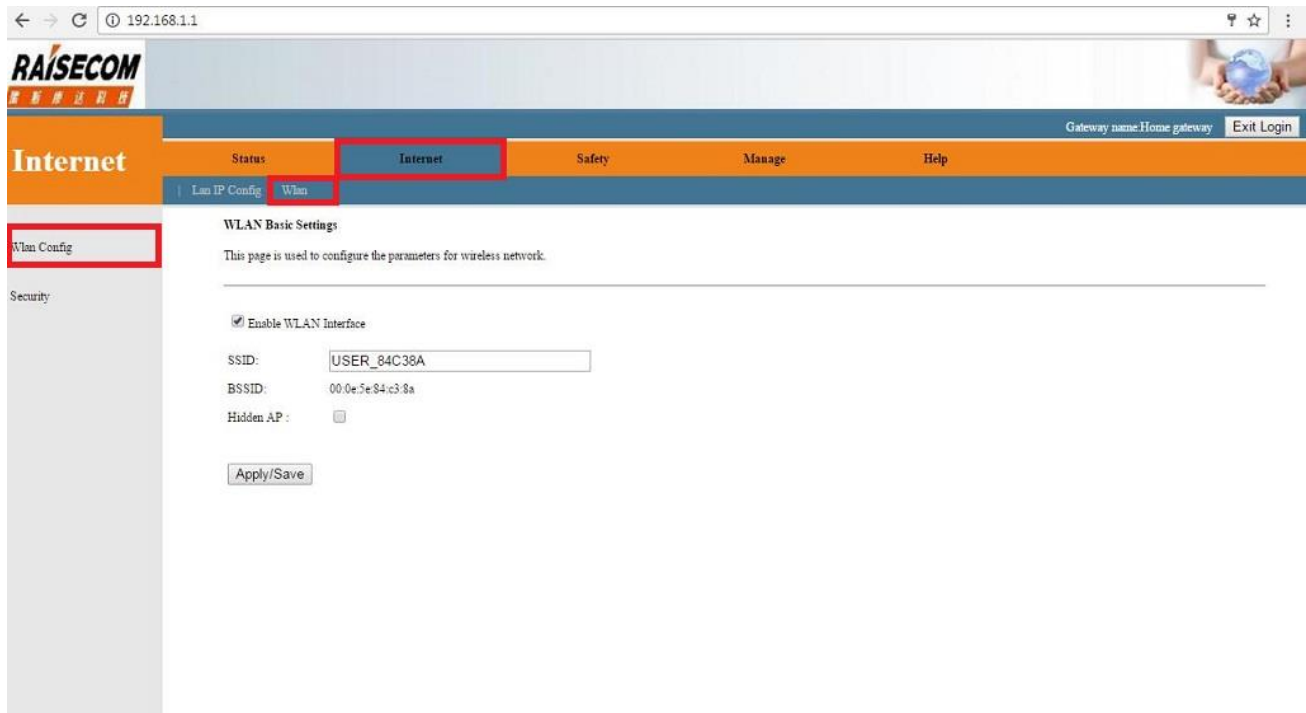

### 3.2. สำหรับ User Super Administration (สามารถเปลี่ยน CH Wireless ได้)

- Mode: โหมดของสัญญาณ Wireless
- Enable WLAN Interface: เปิด-ปิด Function WLAN
- SSID: ตั้งชื่อสัญญาณ Wireless
- BSSID: MAC ของ WLAN Router
- Country: ประเทศ
- Channel Number: Channel สัญญาณ Wireless
- Radio Power: ระดับความแรงการส่งสัญญาณ Wireless
- Max Clients: จำนวนอุปกรณ์ที่สามารถเชื่อมต่อ Wireless มากี่ Router (สูงสุด 64)
- Hidden AP: ซ่อนชื่อสัญญาณ Wireless

**RAISECOM**  
新 華 泰 科 技

Gateway name: Home gateway [Exit Login](#)

**Internet** | Status | Internet | Safety | Apply | Manage | Diagnose | Help

| Internet Setting | Wan Config | Lan IP Config | Wan | Remote Management | QoS | Time Management | Routing Config

**WLAN Basic Settings**

This page is used to configure the parameters for wireless network.

Enable WLAN Interface

Mode:  ▾

SSID:

BSSID:

Country:  ▾

Channel Width:  ▾

Channel Number:  ▾ Current Channel: 1

Data Rate:  ▾

Radio Power (%):  ▾

Max Clients:  (0-32, 0 indicates max 64.)

Clients Isolate:


Hidden AP:

SGI:  ON  OFF

MultipleAp:

#### 4. แถบเมนูด้านบน เลือก Internet > Wlan > แถบเมนูซ้ายมือ เลือก Security

- SSID: เลือกชื่อ SSID ที่ต้องการตั้งค่า
- Encryption: เลือกรูปแบบ Security ที่ต้องการ

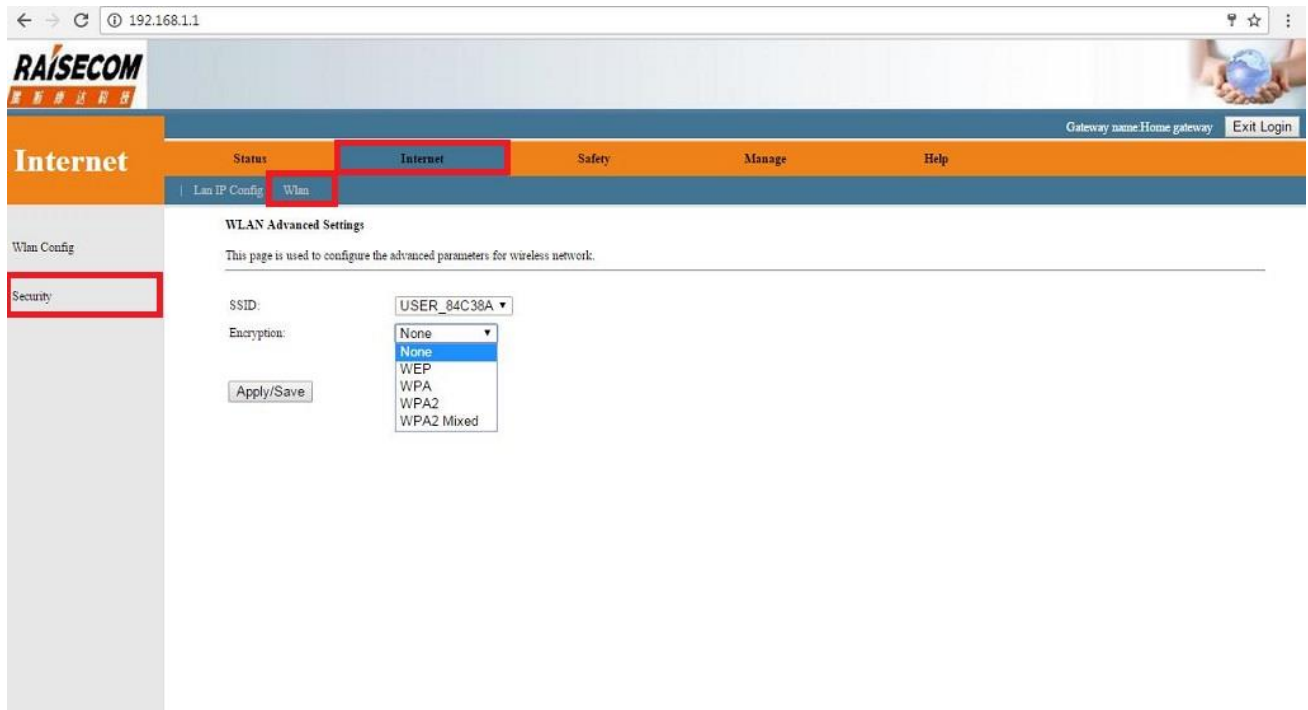

## หน้าจอต้อนรับ Security แบบ WEP

← → ↻ 192.168.1.1

**RAISECOM**

Gateway name: Home gateway Exit Login

**Internet** Status Internet Safety Manage Help

Wlan Config

Security

### WLAN Advanced Settings

This page is used to configure the advanced parameters for wireless network.

SSID: USER\_84C38A

Encryption: WEP

Authentication:  Open System  Shared Key  Auto

Key Length: 64-bit

Key Format: ASCII (5 characters)

Encryption Key:  Show Key

Apply/Save

## หน้าจอต้อนรับ Security แบบ WPA

← → ↻ 192.168.1.1

**RAISECOM**

Gateway name: Home gateway Exit Login

**Internet** Status Internet Safety Manage Help

Wlan Config

Security

### WLAN Advanced Settings

This page is used to configure the advanced parameters for wireless network.

SSID: USER\_84C38A

Encryption: WPA

WPA:  TKIP  AES

Key:  Show Key

Apply/Save

## หน้าจอต้อนรับ Security แบบ WPA2

The screenshot shows the RAISECOM router's web interface. The browser address bar shows the URL 192.168.1.1. The page title is "RAISECOM" and the navigation menu includes "Internet", "Status", "Internet", "Safety", "Manage", and "Help". The "Internet" menu is expanded, showing "Lan IP Config" and "Wlan". The "Wlan" menu is further expanded to show "Wlan Config" and "Security". The "Security" page is titled "WLAN Advanced Settings" and contains the following fields:

- SSID: USER\_84C38A
- Encryption: WPA2
- WPA2:  TKIP  AES
- Key: [Redacted] [Show Key]
- [Apply/Save]

## หน้าจอต้อนรับ Security แบบ WPA Mixed

The screenshot shows the RAISECOM router's web interface. The browser address bar shows the URL 192.168.1.1. The page title is "RAISECOM" and the navigation menu includes "Internet", "Status", "Internet", "Safety", "Manage", and "Help". The "Internet" menu is expanded, showing "Lan IP Config" and "Wlan". The "Wlan" menu is further expanded to show "Wlan Config" and "Security". The "Security" page is titled "WLAN Advanced Settings" and contains the following fields:

- SSID: USER\_84C38A
- Encryption: WPA2 Mixed
- WPA:  TKIP  AES
- WPA2:  TKIP  AES
- Key: [Redacted] [Show Key]
- [Apply/Save]