

Set up Access Point Mode for TP-Link Archer C9

1. Equipment setting

1.1. Connect Wireless to device


1.2. Wireless –turn off main modem

1.3. Connect LAN cable from main modem to Internet port behind AP TP-Link Archer C9


1.4. Turn on main modem

1.5. Turn on AP TP-Link Archer C9

Remarks: because AP TP-Link Archer C9 has set Access Point mode from the factory. If correctly connected, it'll be ready to use immediately. To check the settings as following steps:

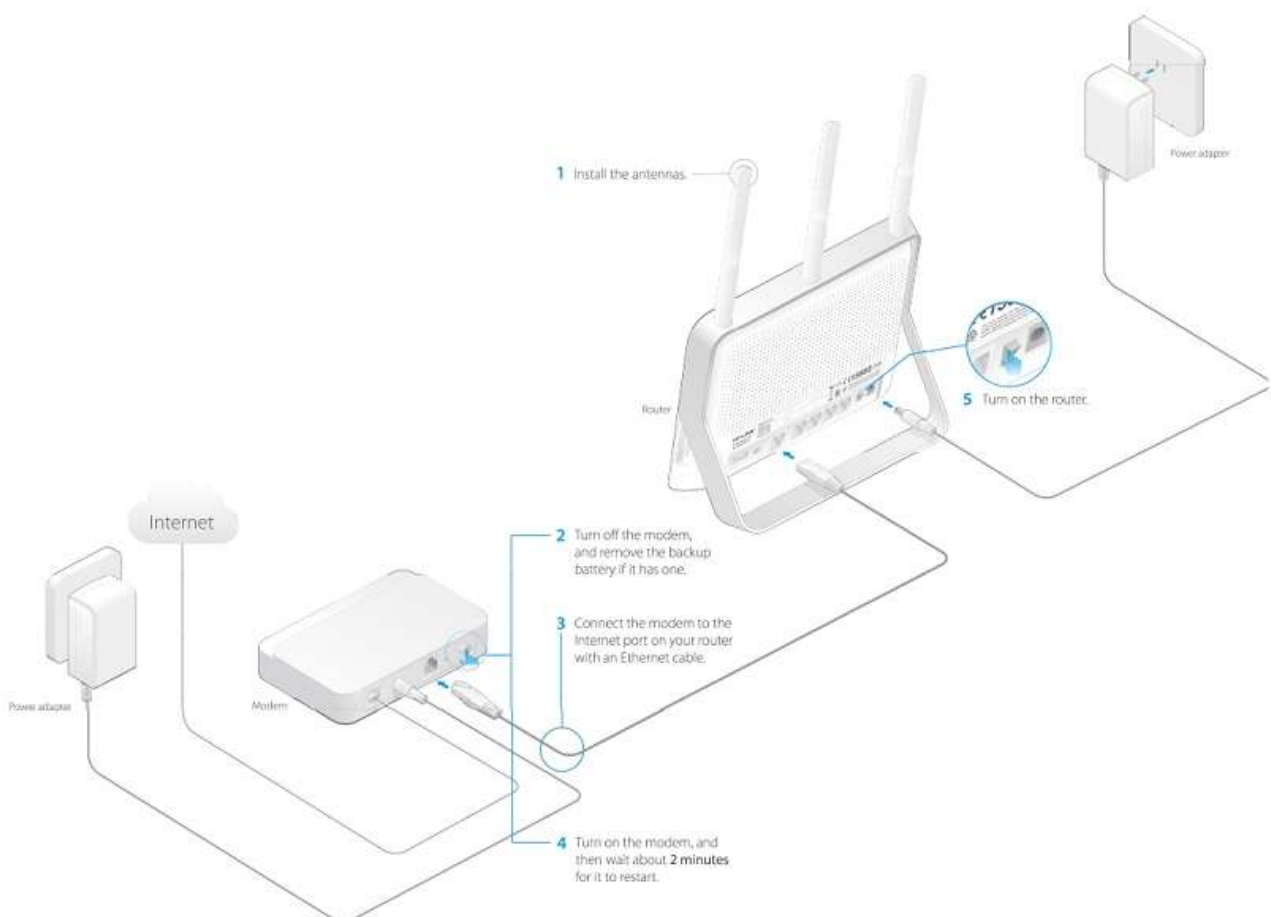


2. Check the settings : type **192.168.0.1** in the Address bar on Browser then press **Enter**, type Username = **admin**, Password = **admin** and press **Login**

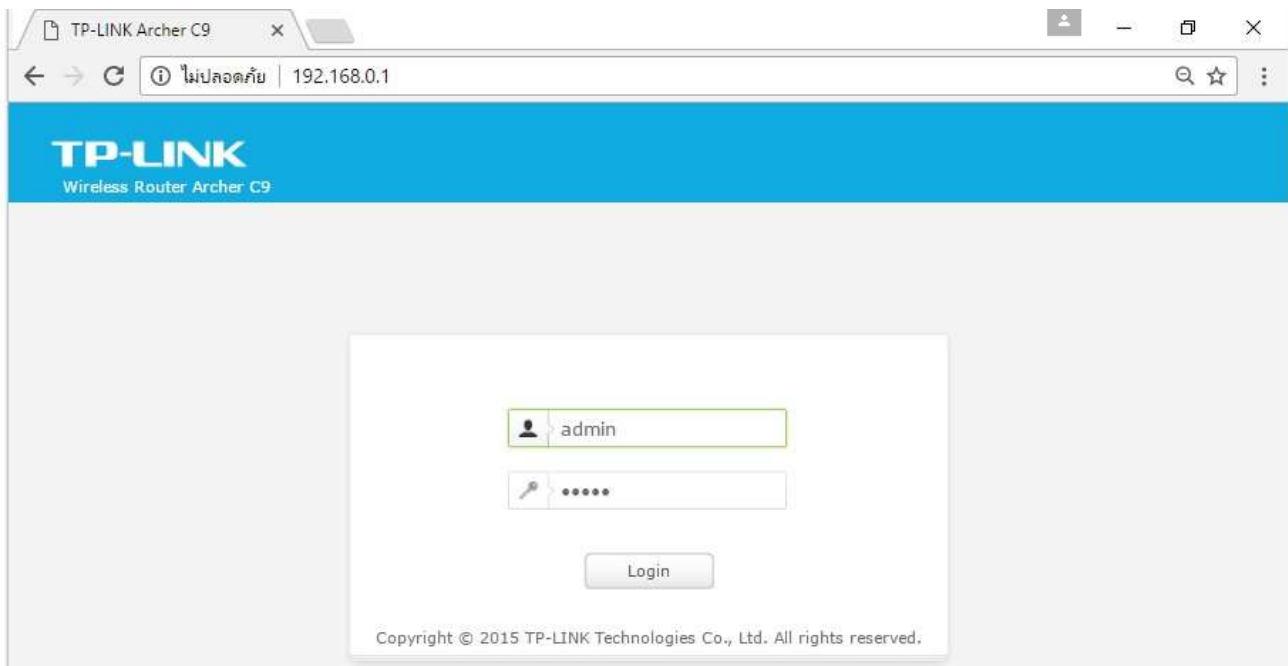

3. Quick Setup


3.1. Region and Time zone

- Region : can't change
- Time zone : select Bangkok, Jakarta, Hanoi
- Once completed, press **Next**

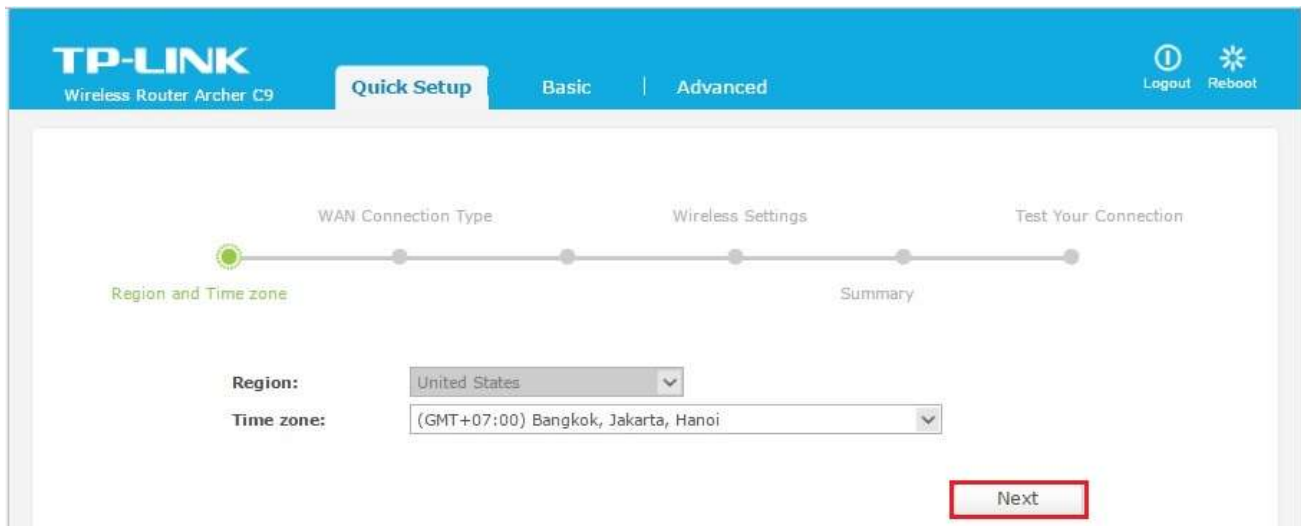

3.2. WAN Connection Type

- Select **Dynamic IP** and press **Next**

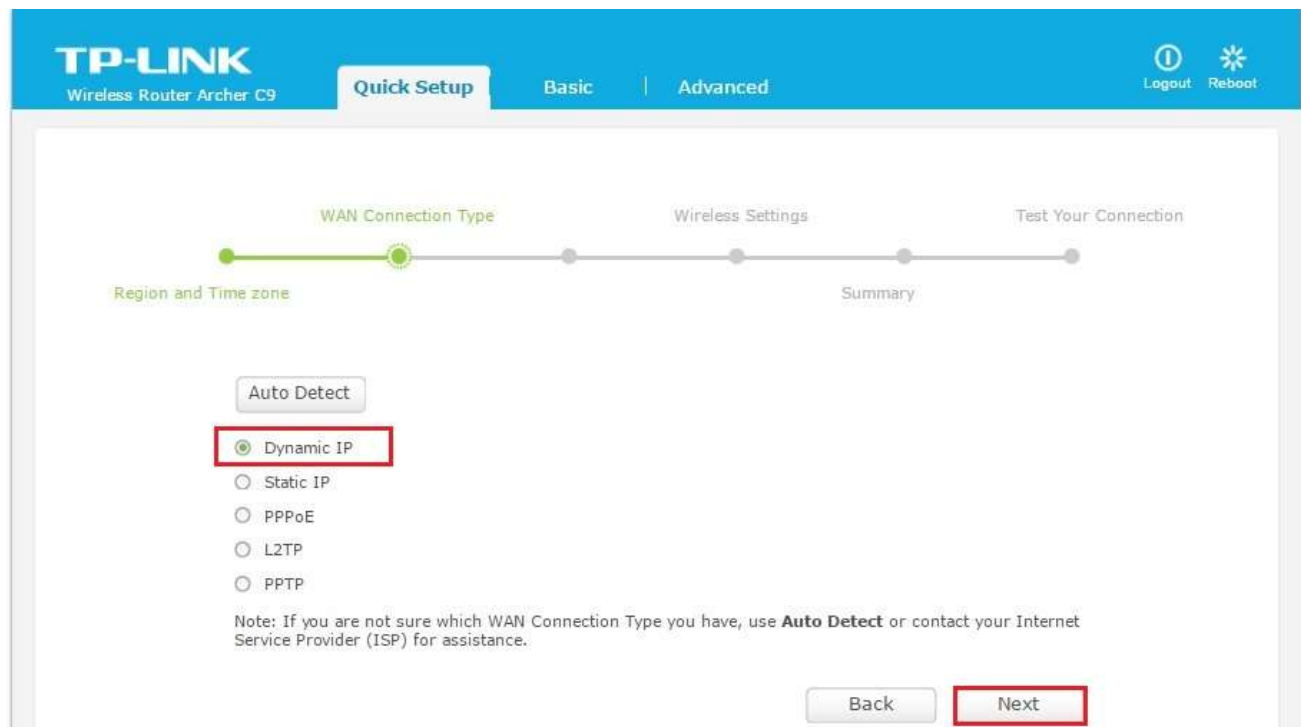

3.3. Select Do NOT clone Mac Address then press Next

The screenshot shows the TP-Link Archer C9 Quick Setup interface. At the top, there is a blue header with the TP-LINK logo, 'Wireless Router Archer C9', and navigation tabs for 'Quick Setup', 'Basic', and 'Advanced'. On the right side of the header, there are 'Logout' and 'Reboot' buttons. Below the header, a progress bar indicates the current step: 'WAN Connection Type' (highlighted in green), followed by 'Region and Time zone', 'Wireless Settings', 'Summary', and 'Test Your Connection'. The main content area is titled 'WAN Connection Type - Dynamic IP'. It contains the following text: 'If your ISP only delivers internet access to a specific MAC address, you may need to Clone that MAC Address to provide access to other devices. If you are not sure, select **Do NOT clone MAC Address**.' Below this text are two radio button options: 'Do NOT clone MAC Address' (which is selected and highlighted with a red box) and 'Clone MAC Address'. A note at the bottom states: 'Note: If you select **Clone MAC Address**, please make sure the MAC Address of this computer is registered with your ISP before clicking **Next**.' At the bottom right, there are 'Back' and 'Next' buttons, with the 'Next' button highlighted with a red box.

3.4. Wireless Settings

- Wireless 2.4GHz, 5GHz : select ON
- Network Name(SSID) : enter name as desired
- Password : set password using 8 characters up (for Wireless Quick Setup, it'll be encrypted by WPA/WPA2 Personal)
- Once completed, press **Next**

The screenshot shows the TP-LINK Archer C9 Quick Setup interface. The top navigation bar includes the TP-LINK logo, the product name 'Wireless Router Archer C9', and tabs for 'Quick Setup', 'Basic', and 'Advanced'. On the right, there are 'Logout' and 'Reboot' links. A progress bar at the top indicates the current step is 'Wireless Settings', with other steps being 'Region and Time zone', 'WAN Connection Type', 'Summary', and 'Test Your Connection'. The main content area contains settings for two wireless bands:

Wireless 2.4GHz:	<input checked="" type="checkbox"/> ON <input type="checkbox"/> OFF
Network Name(SSID):	<input type="text" value="TP-LINK_1709"/>
Password:	<input type="text" value="16419643"/>
Wireless 5GHz:	<input checked="" type="checkbox"/> ON <input type="checkbox"/> OFF
Network Name(SSID):	<input type="text" value="TP-LINK_1708_5G"/>
Password:	<input type="text" value="16419643"/>

At the bottom right, there are 'Back' and 'Next' buttons. The 'Next' button is highlighted with a red border.

3.5. Summary

- It's the summary of settings that we selected, press **Save**


The screenshot shows the TP-LINK Archer C9 Quick Setup interface. At the top, there is a blue header with the TP-LINK logo, 'Wireless Router Archer C9', and navigation tabs for 'Quick Setup', 'Basic', and 'Advanced'. On the right side of the header, there are 'Logout' and 'Reboot' buttons. Below the header, a progress bar indicates the current step: 'Summary'. The progress bar has five steps: 'Region and Time zone', 'WAN Connection Type', 'Wireless Settings', 'Summary', and 'Test Your Connection'. The 'Summary' step is highlighted with a green circle. Below the progress bar, the following settings are displayed:

Region:	United States
Time zone:	(GMT+07:00) Bangkok, Jakarta, Hanoi
WAN Connection Type:	Dynamic IP
Wireless 2.4GHz:	On
Network Name(SSID):	TP-LINK_1709
Password:	16419643
Wireless 5GHz:	On
Network Name(SSID):	TP-LINK_1708_5G
Password:	16419643

At the bottom right, there are two buttons: 'Back' and 'Save'. The 'Save' button is highlighted with a red border.

3.6. Test Your Connection

- Press **Test Internet Connection** , Detecting process for a while then **Success**
- Press **Finish**

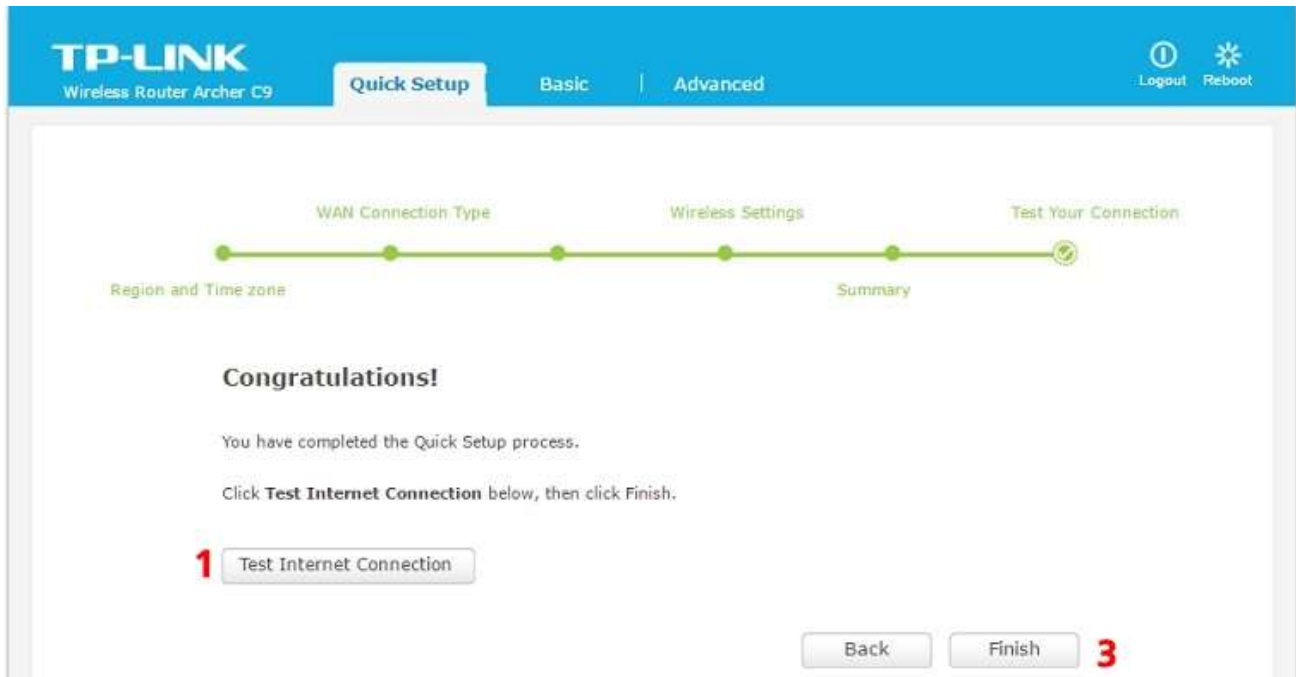

Congratulations!

You have completed the Quick Setup process.

Click **Test Internet Connection** below, then click .

Test Internet Connection

Detecting... 2

We are detecting, please waiting for a moment.

Congratulations!

You have completed the Quick Setup process.

Click **Test Internet Connection** below, then click Finish.

Test Internet Connection

Success!

Click **Finish** to end the Quick Setup process. 

3.7. After Quick Setup, screen will return to Network Map

