


Internet and MMS APN Settings for True SMART 4G MAX 5.0

1. On main screen, select **[Settings]**



2. Select **[More]**

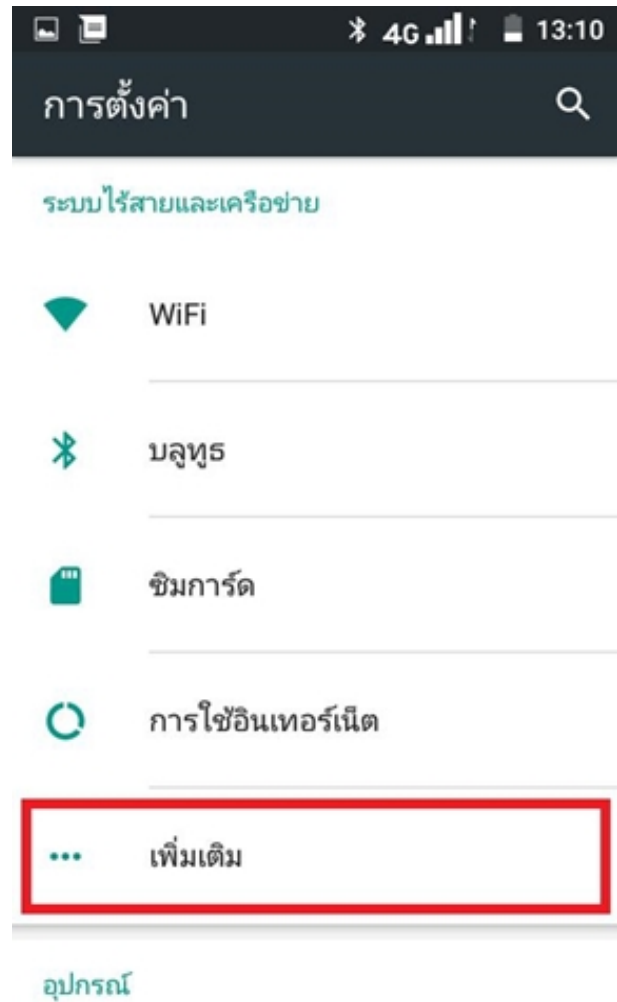



3. Select [Cellular network]



4. And then [Access point name]




5. APN as per inserted SIM card, if no 6. Select **[Reset to Default]** or unusable, you can reset it by pressing **Menu** button (3 dots sign)

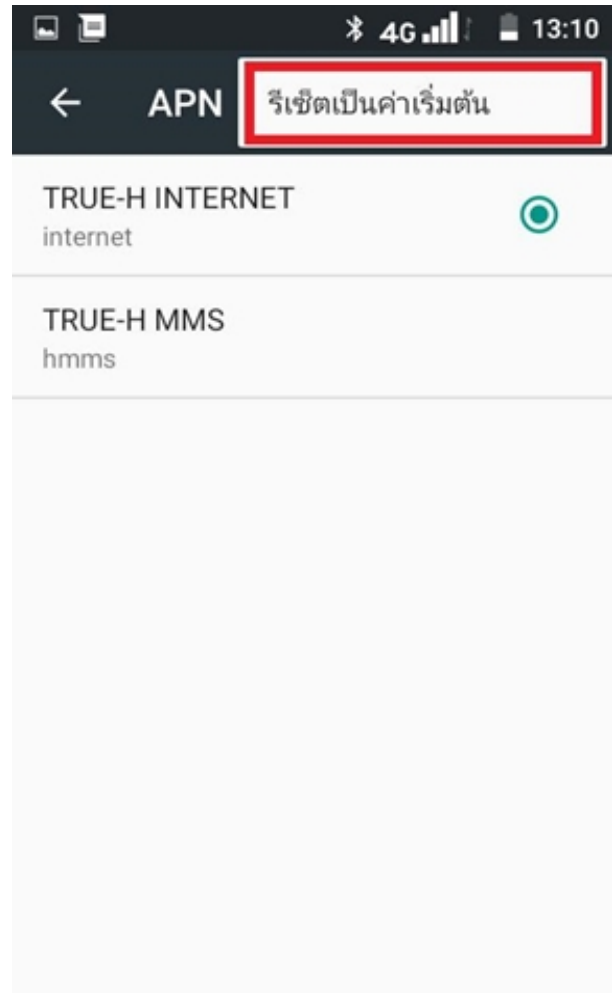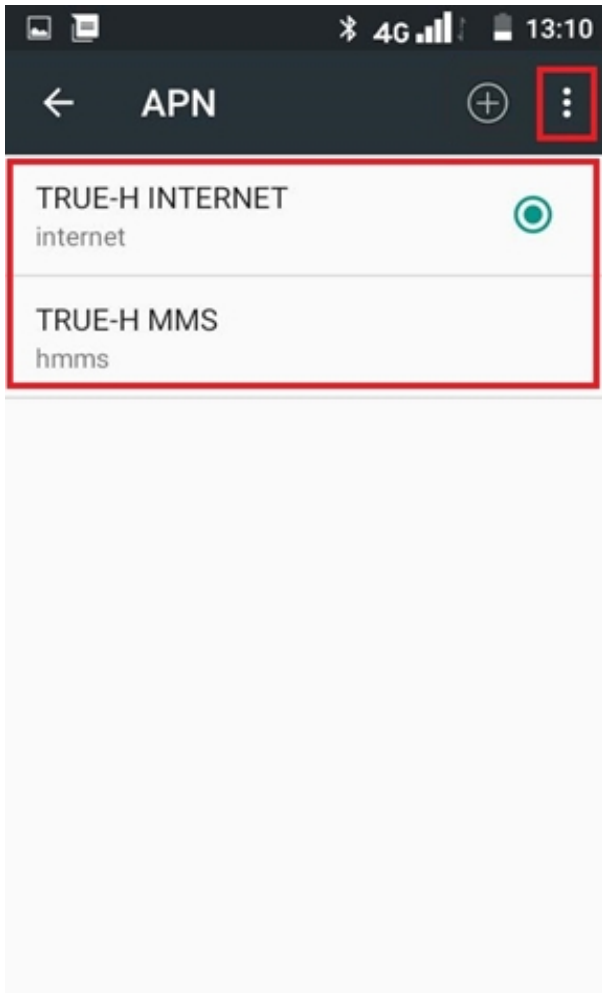


7. APN settings as follows:

- TRUE-H INTERNET
- TRUE-H MMS

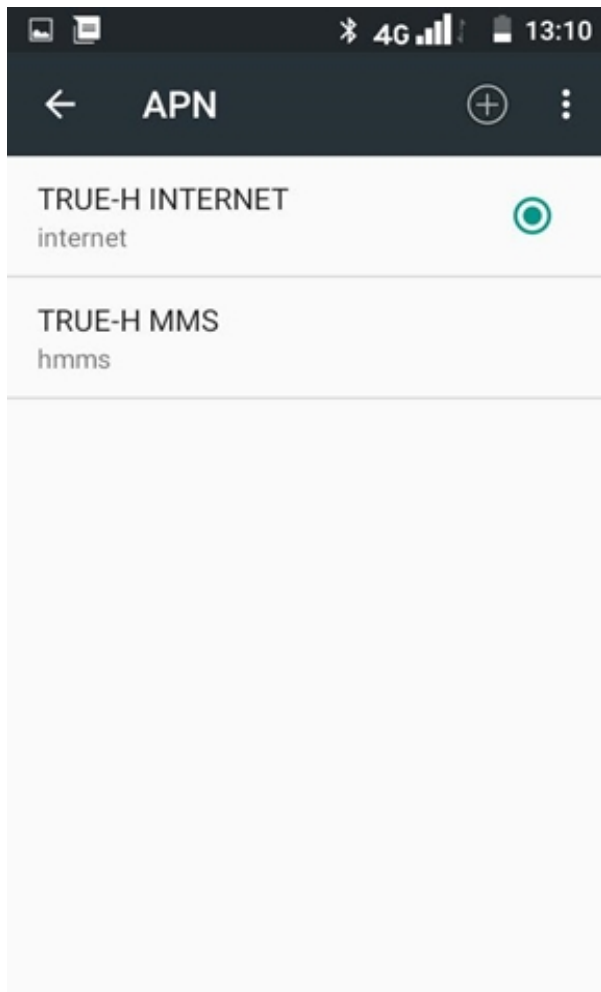

8. Manual APN, go to [Access point name], press **plus sign (+)**

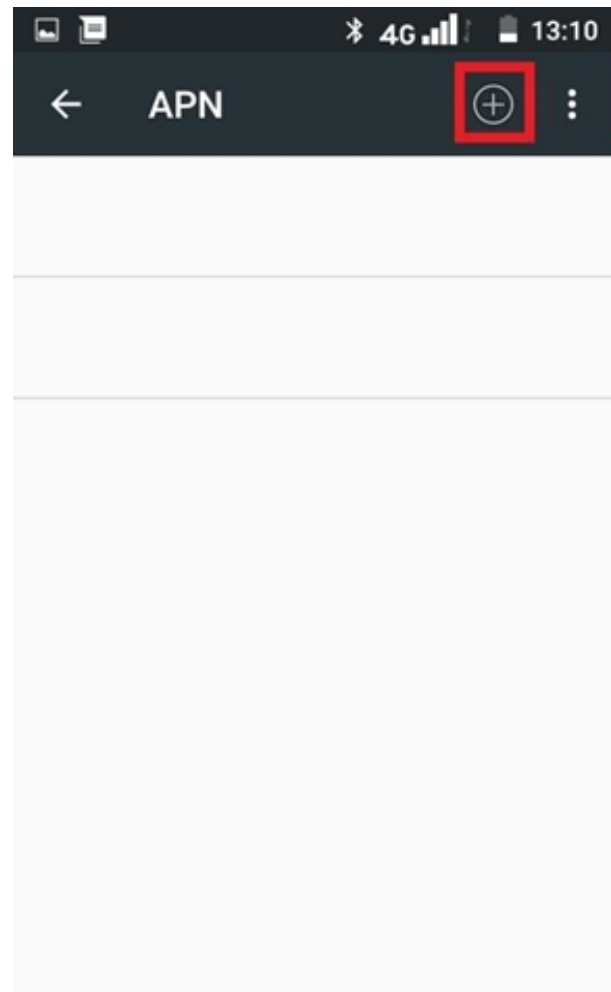

9. TRUE-H INTERNET

- [Name] : TRUE-H INTERNET
- [APN] : internet
- [Username] : true
- [Password] : true
- MCC : 520
- MNC : 00 (Real Move) / 04 (Real Future)
- [APN Type] : default,supl



10. Once completed, press Menu and then [Save]



11. TRUE-H MMS

- [Name] : TRUE-H MMS
- [APN] : hmms
- [Username] : true
- [Password] : true
- MMSC : http://mms.trueh.com:8002/
- [MMS Proxy] : 010.004.007.039
- [MMS Port] : 8080
- MCC : 520
- MNC : 00 (Real Move) / 04 (Real Future)
- [APN Type] : mms



12. Once completed, press Menu and then [Save]

