

Enable VoWiFi (Native) on True SMART 4G GEN-C 5.0


What should know

- This manual can be applied to True SMART 4G GEN-C Series and True SMART 4G other models with Android 7.0
- VoWiFi can be used through SIM1 only, since SIM1 is eligible for 4G whereas SIM2 is eligible for 2G and SIM1 Cellular data must be enabled
- House Brand phone is not compatible with VoWiFi (Native) of other network since True doesn't know other network's Parameter


1. On main screen, select (All Apps) (6-dot sign)




2. Select (Settings)

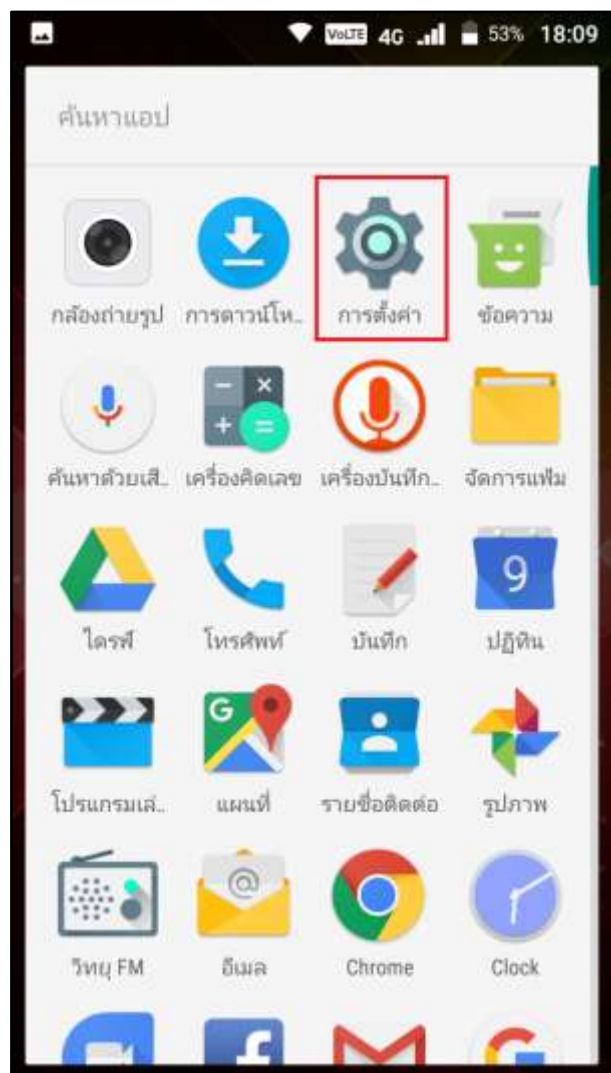

3. And then (More)

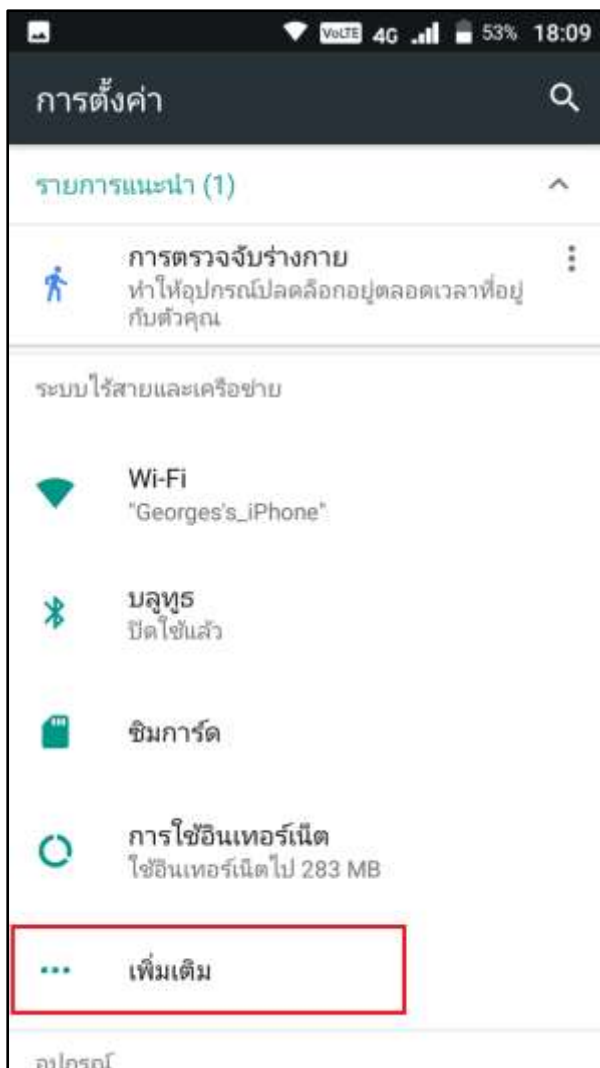

4. Choose (Wi-Fi calling)

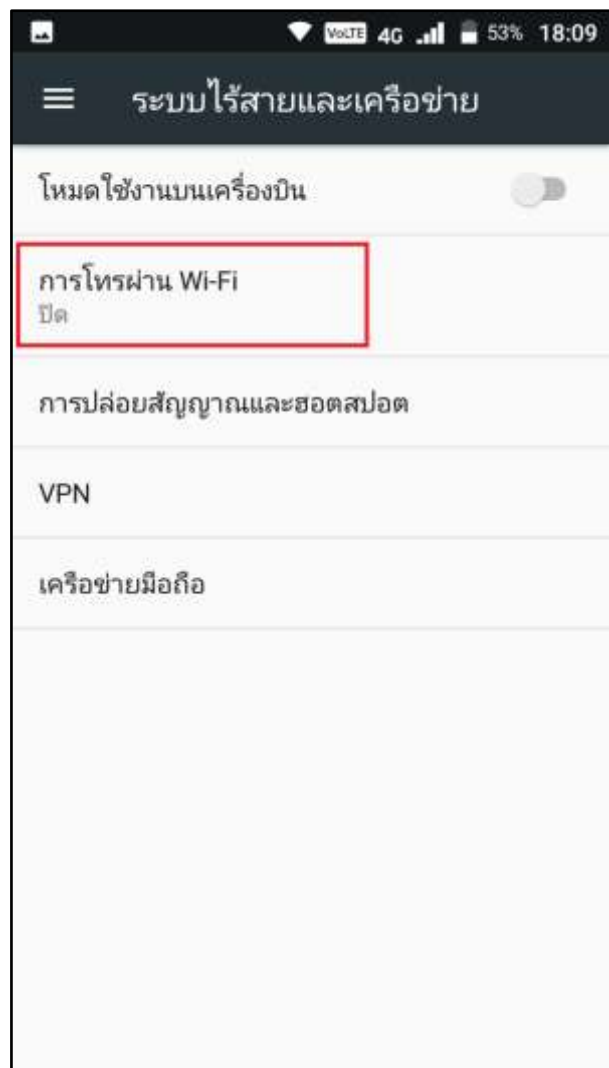


5. At (Wi-Fi calling), tap turn on, a button will turn green



6. If connected Wi-Fi, **VoWiFi** sign will appear near Wi-Fi sign (fan) and **VoLTE** will disappear



7. Once turned on (no matter system can connect VoWiFi(Native) or not), there'll be option for (Calling preference) in case there are both Cellular data and Wi-Fi network > [tap here](#) to choose

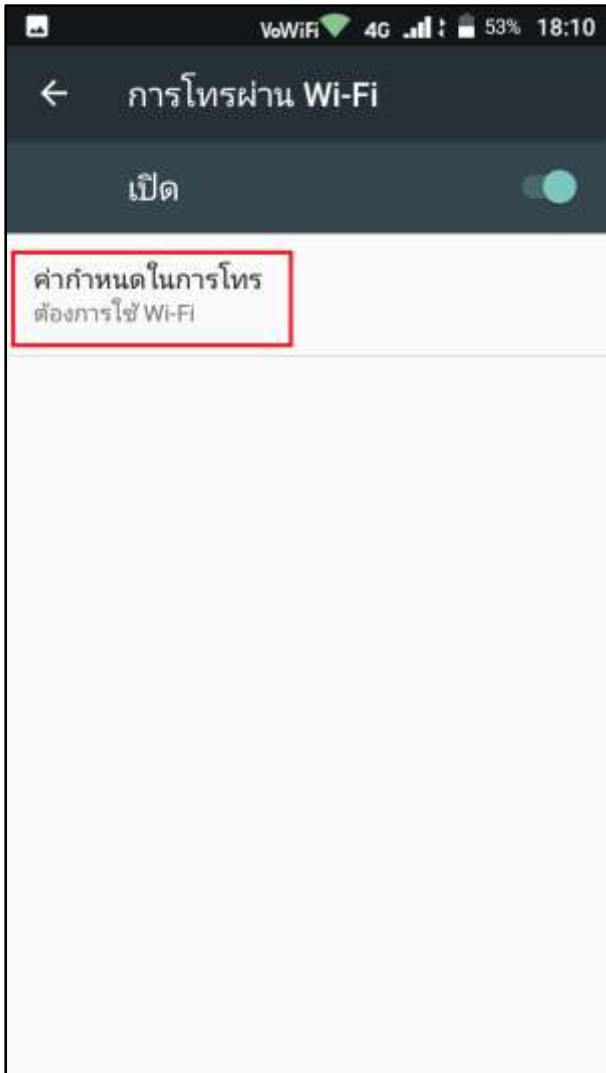

8. Two options are:

- **Wi-Fi preferred:** choose VoWiFi (Native) as first priority > [choose here](#)
- **Cellular preferred**




9. When there's incoming call "Incoming Wi-Fi call" will appear



10. When receiving call:

- A fan sign and a message “Main Card :Wi-Fi call” will appear
- At top left corner will have phone and fan sign
- VoWiFi will show at top center

remarks : if making call, when the destination receives call “Main Card :Wi-Fi call” will show on screen

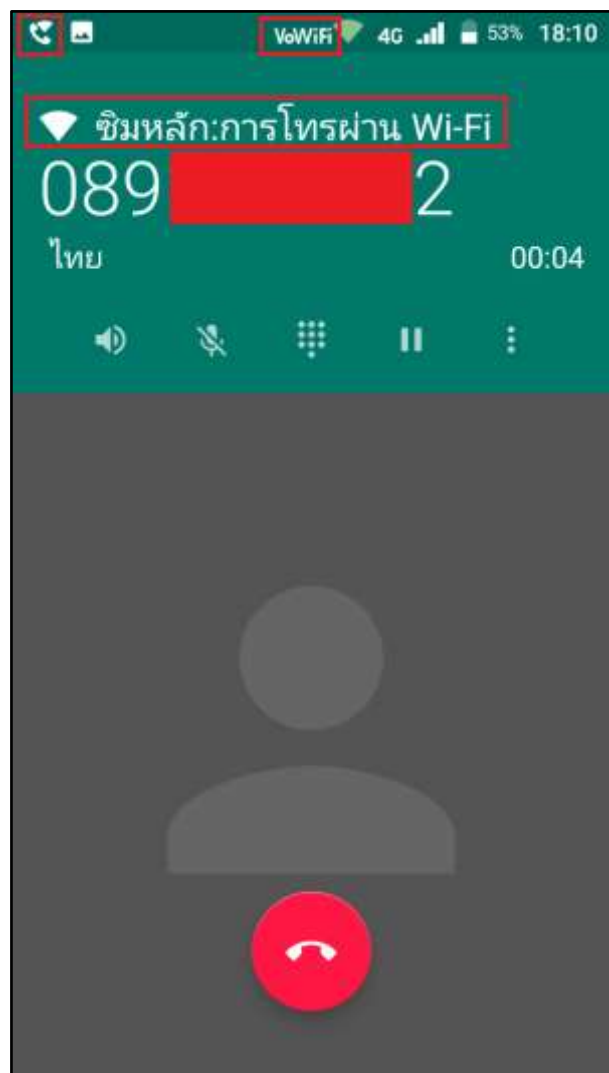

11. At (Call History), it will show technology when making-receiving call:

- VoLTE = call via VoLTE
- VoWiFi = call via VoWiFi
- VoLTE VoWiFi = switch between VoLTE and VoWiFi

