


APN Settings on True SMART 4G OCTA 5.5

1. At Home screen, select [Settings]



2. Select [More]

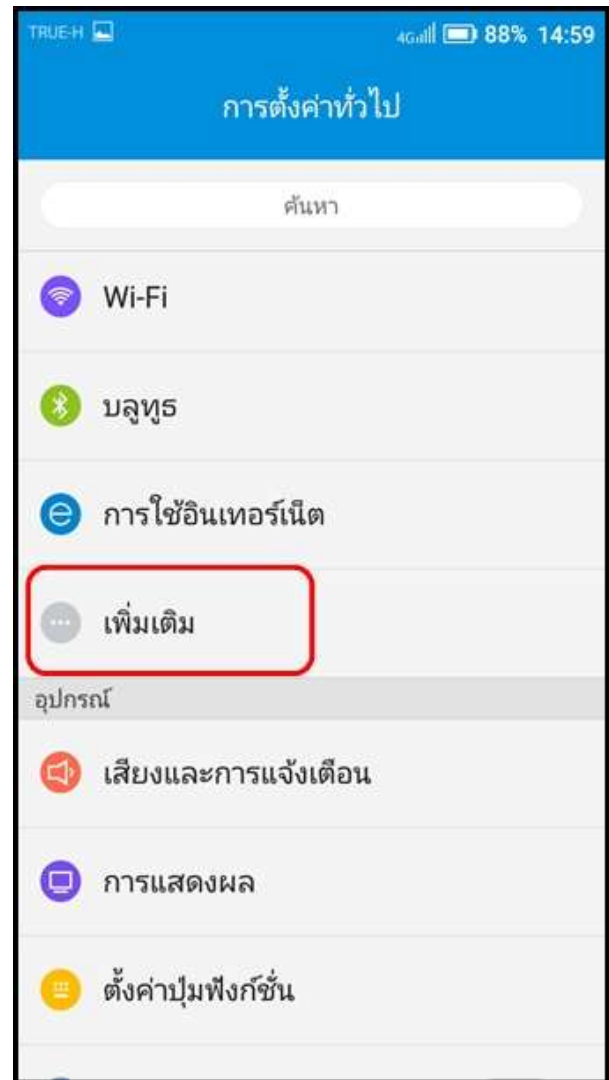



3. And then [Cellular network]



4. Choose [Access point name]




5. You'll find APN as per inserted Sim card, if not
6. Then [Reset to Default]
or unusable, you can reset by pressing **Menu**
dots sign)

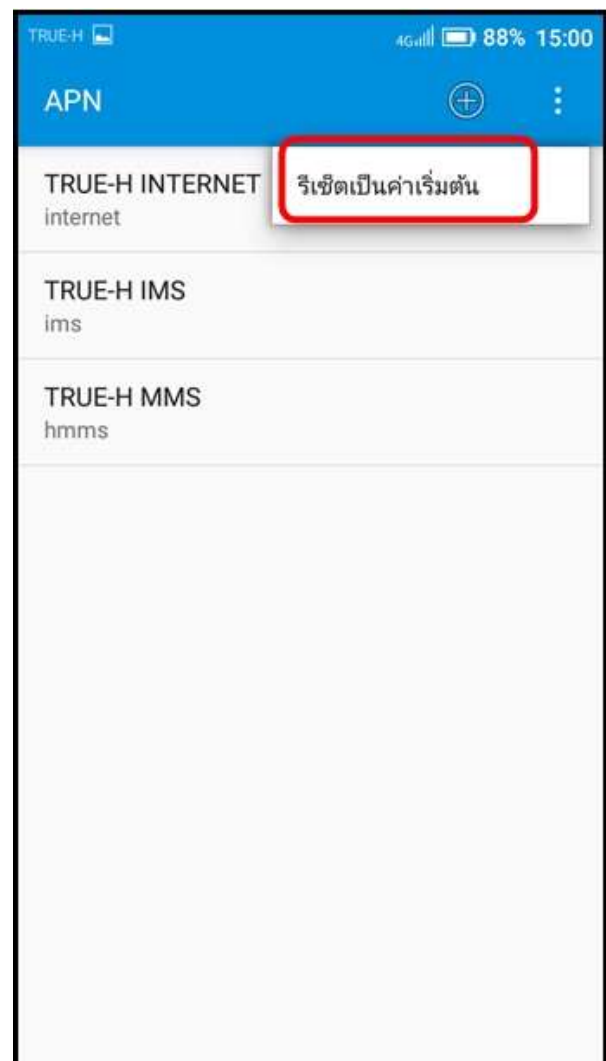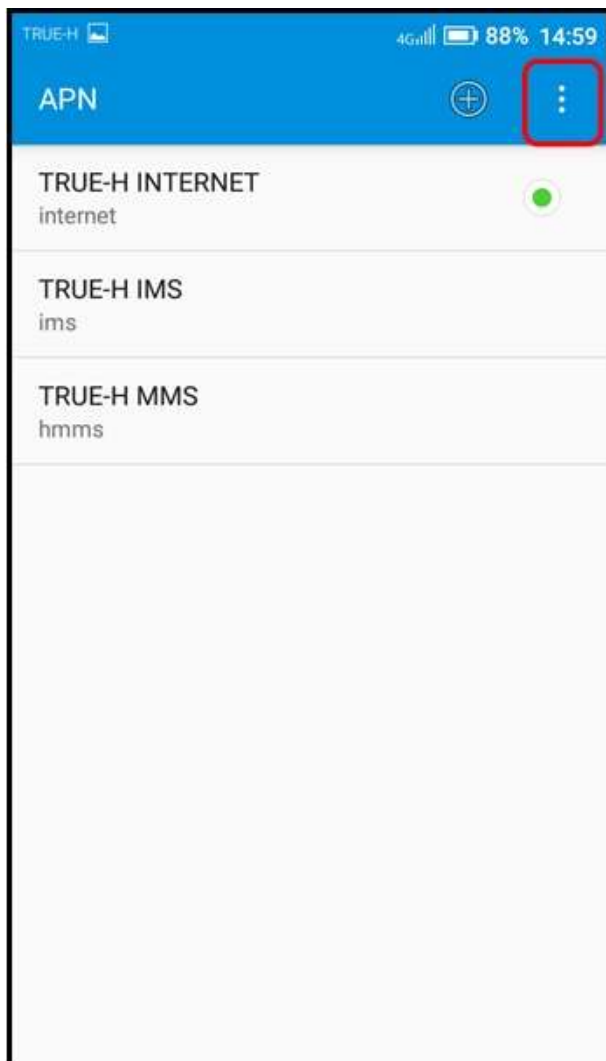


7. APN setting as follows:

- TRUE-H INTERNET
- TRUE-H IMS
- TRUE-H MMS

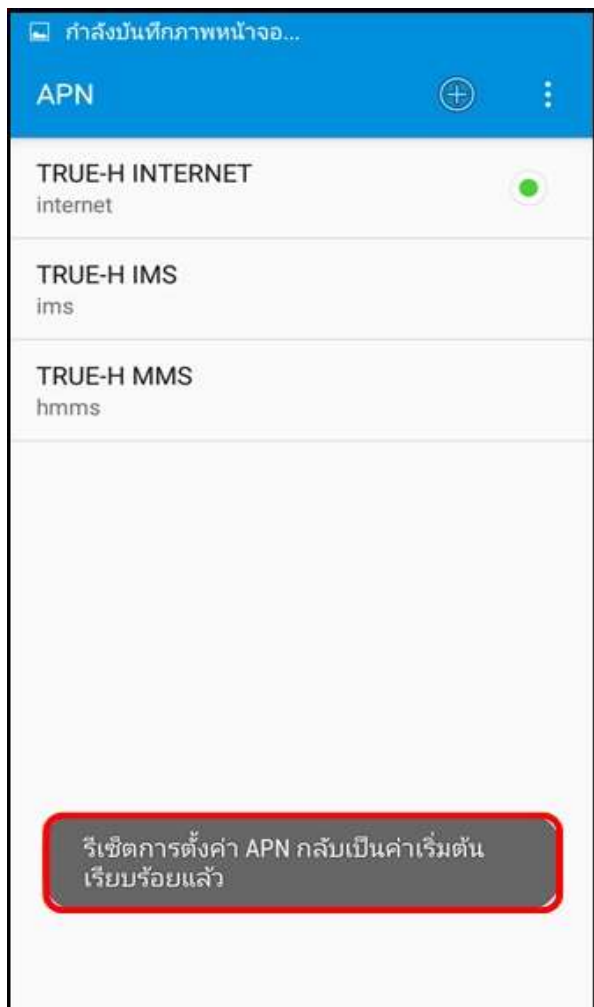

8. To manually set APN, at [Access point name] page, press a Plus sign (+)

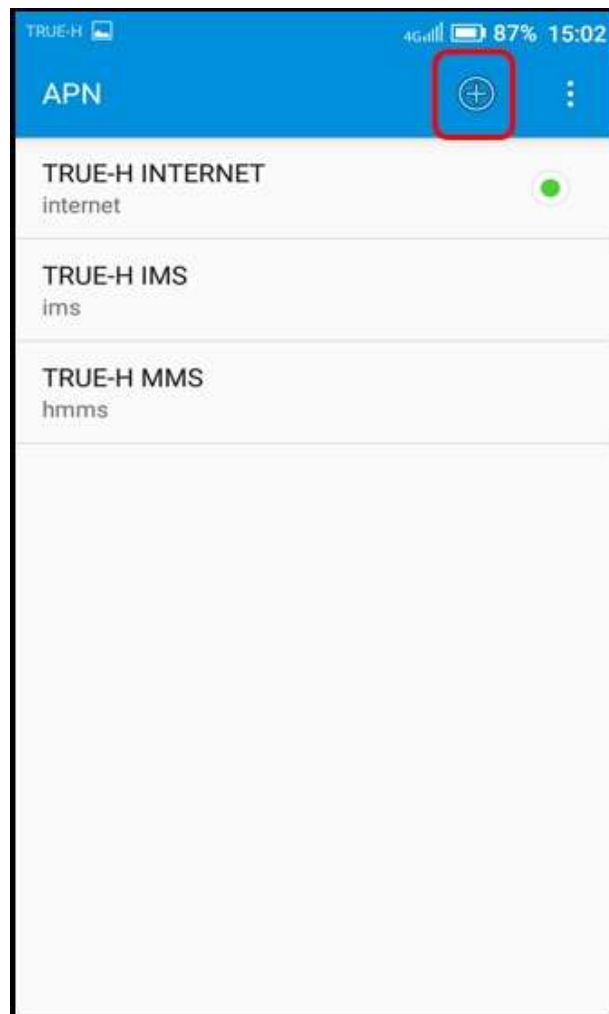

9. TRUE-H INTERNET

- [Name] : TRUE-H INTERNET
- [APN] : internet
- [Username] : true
- [Password] : true
- MCC : 520
- MNC : 00 (Real Move) / 04 (Real Future)
- [APN Type] : default, supl



10. Once completed, press Menu button then sele **[Save]**



11. TRUE-H MMS

- [Name] : TRUE-H MMS
- [APN] : hmms
- [Username] : true
- [Password] : true
- MMSC : http://mms.trueh.com:8002/
- [MMS Proxy] : 010.004.007.039
- [MMS Port] : 8080
- MCC : 520
- MNC : 00 (Real Move) / 04 (Real Future)
- [APN Type] : mms



- Once completed, press Menu button then sele **[Save]**

