


Internet and MMS APN Settings for True SMART 4G MAX 4.0

1. On Home screen, select **[Settings]**
2. Select **[More]**





3. Select [Cellular network]

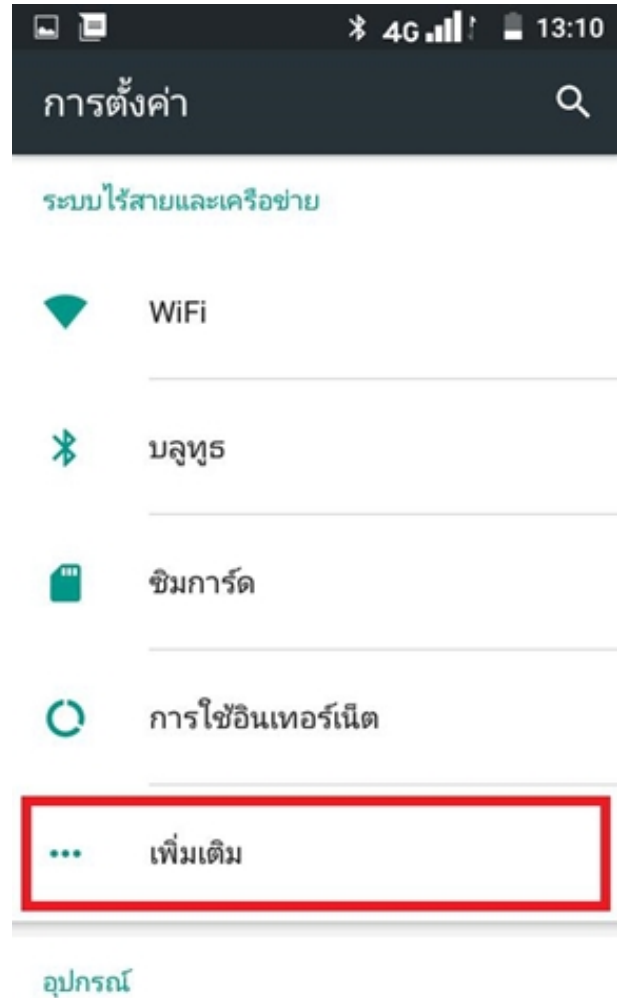


4. And then [Access point name]




5. You'll find APN, if no or unusable you can reset it by pressing **Menu** button (3 dots sign)
6. Select **[Reset to Default]**

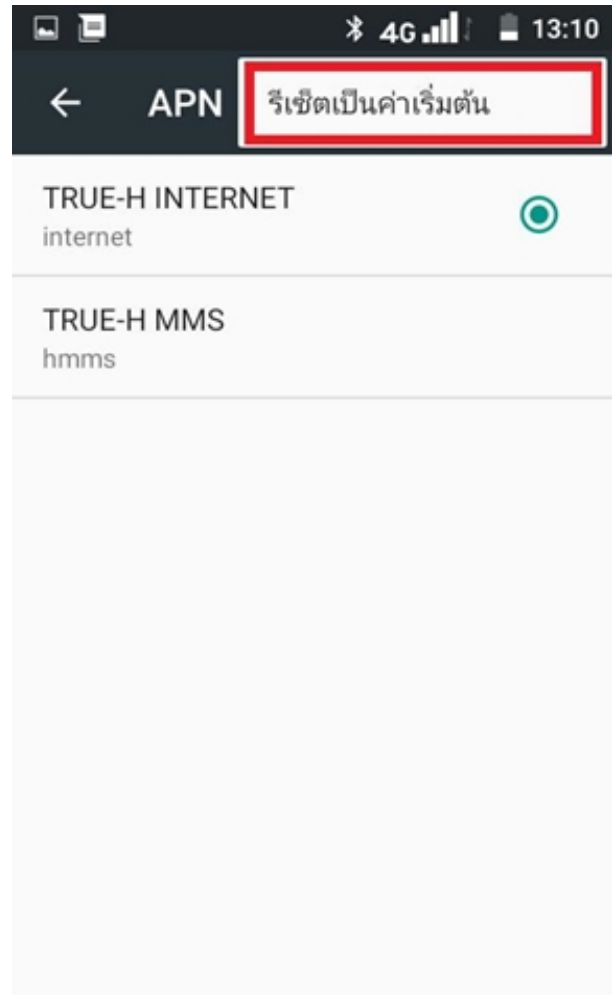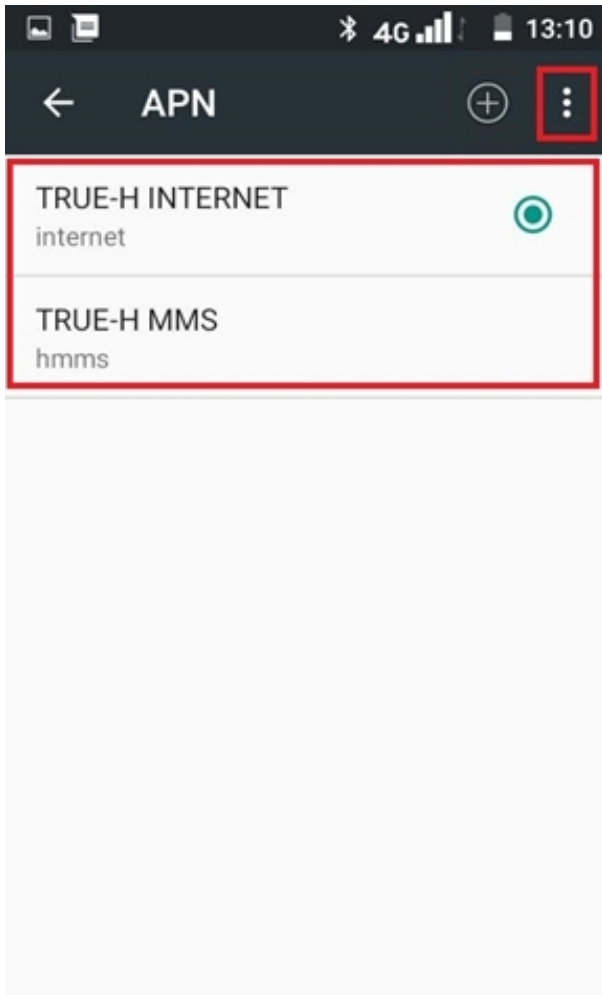

7. APN as per inserted SIM card
- TRUE-H INTERNET
 - TRUE-H MMS

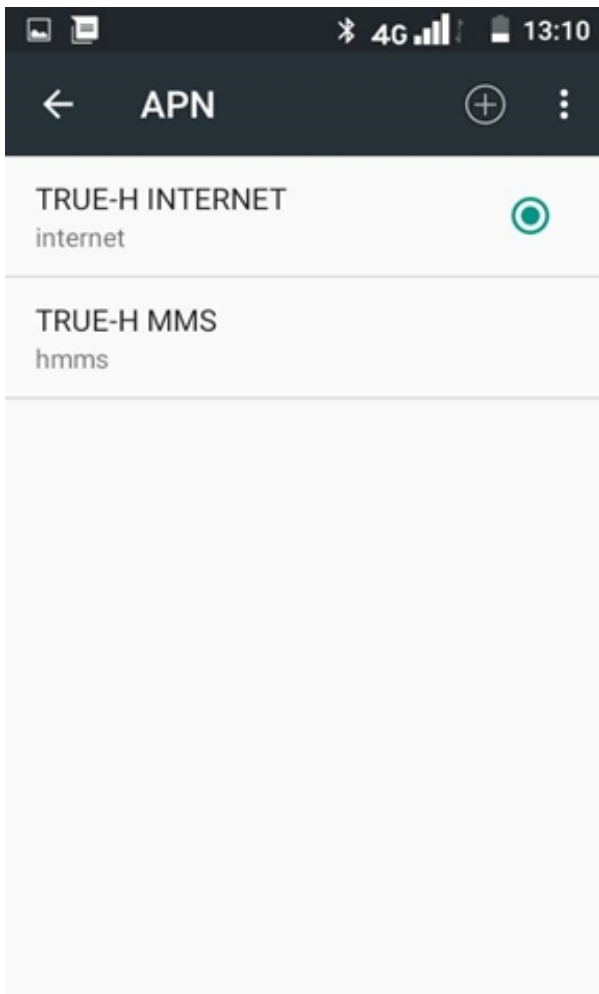

8. Manual APN setting, go to [Access point name] then press **plus sign (+)**

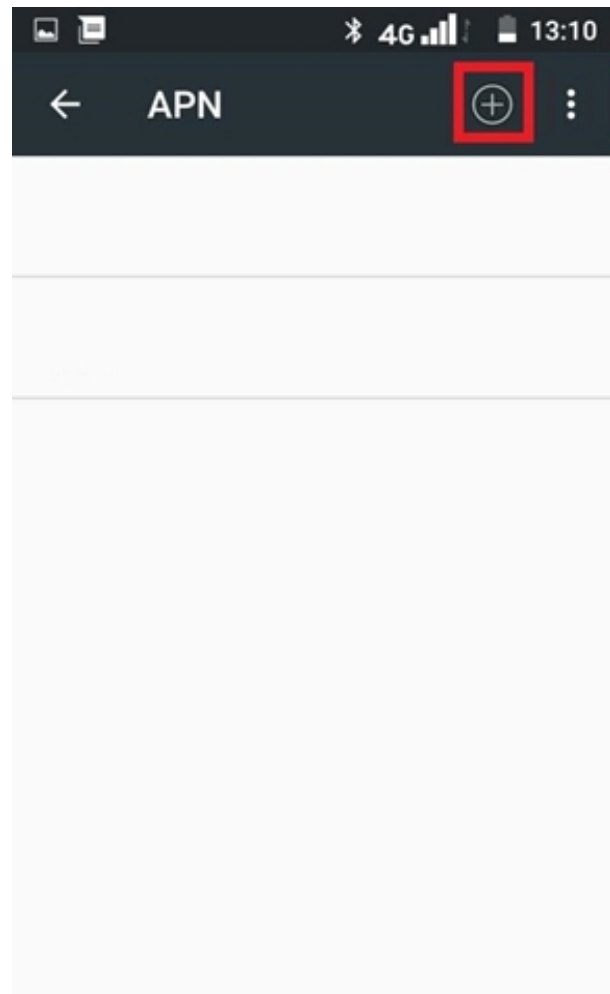


9. TRUE-H INTERNET

- [Name] : TRUE-H INTERNET
- [APN] : internet
- [Username] : true
- [Password] : true
- MCC : 520
- MNC : 00 (Real Move) / 04 (Real Future)
- [APN Type] : default,supl



10. Once completed, press Menu button and then **[Save]**

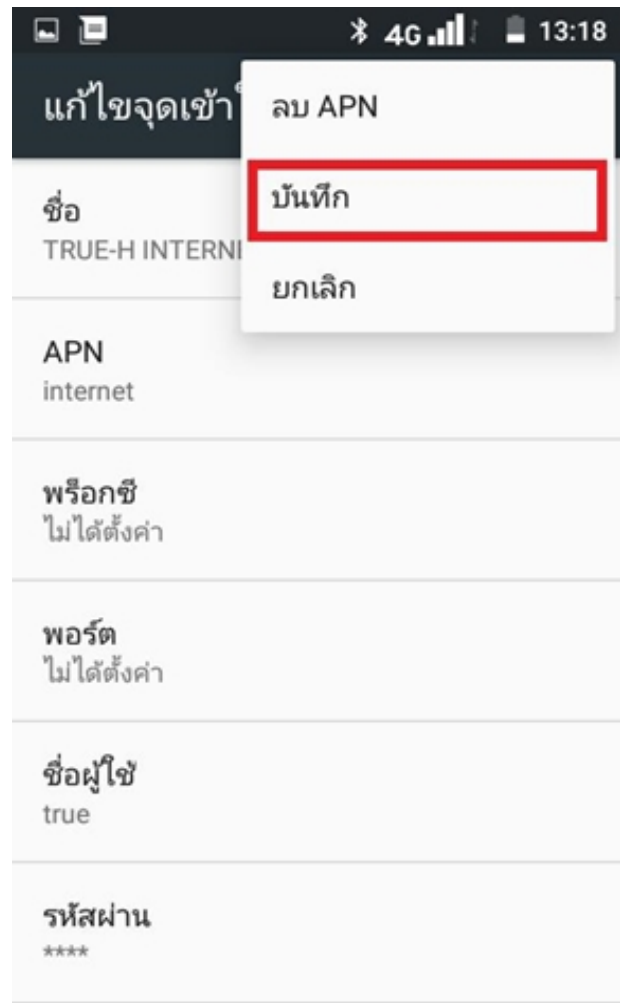

11. TRUE-H MMS

- [Name] : TRUE-H MMS
- [APN] : hmms
- [Username] : true
- [Password] : true
- MMSC : http://mms.trueh.com:8002/
- [MMS Proxy] : 010.004.007.039
- [MMS Port] : 8080
- MCC : 520
- MNC : 00 (Real Move) / 04 (Real Future)
- [APN Type] : mms

12. Once completed, press Menu button and then [Save]

