



Internet and MMS APN Settings for True SMART 4G 3.5 HYBRID


1. On main screen, select **[Menu]**

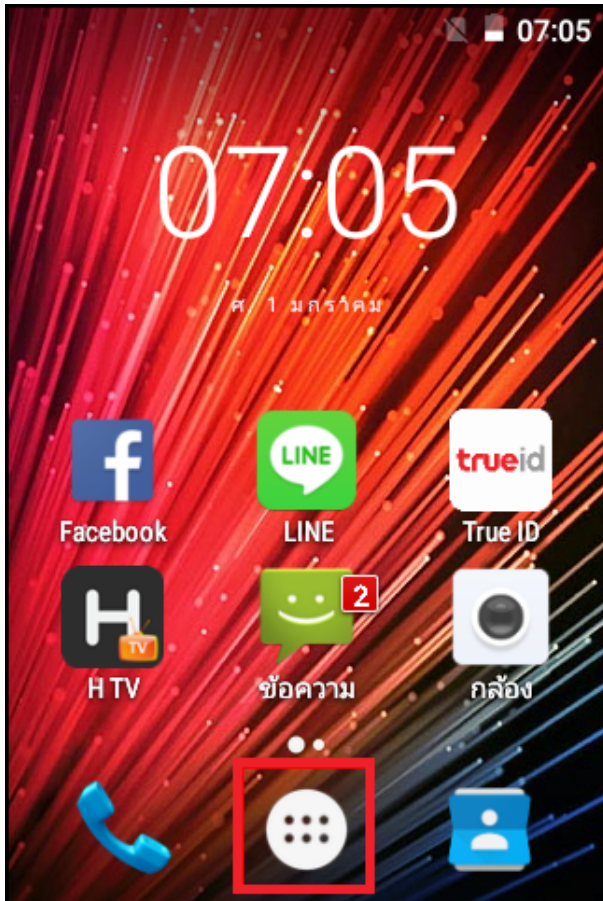


2. Select **[Settings]**

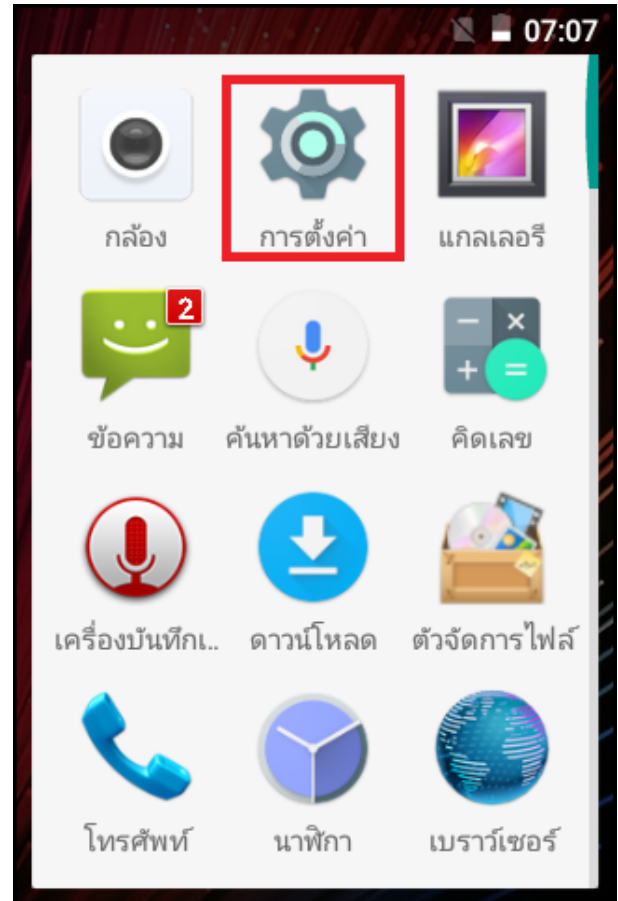


3. Select [More]

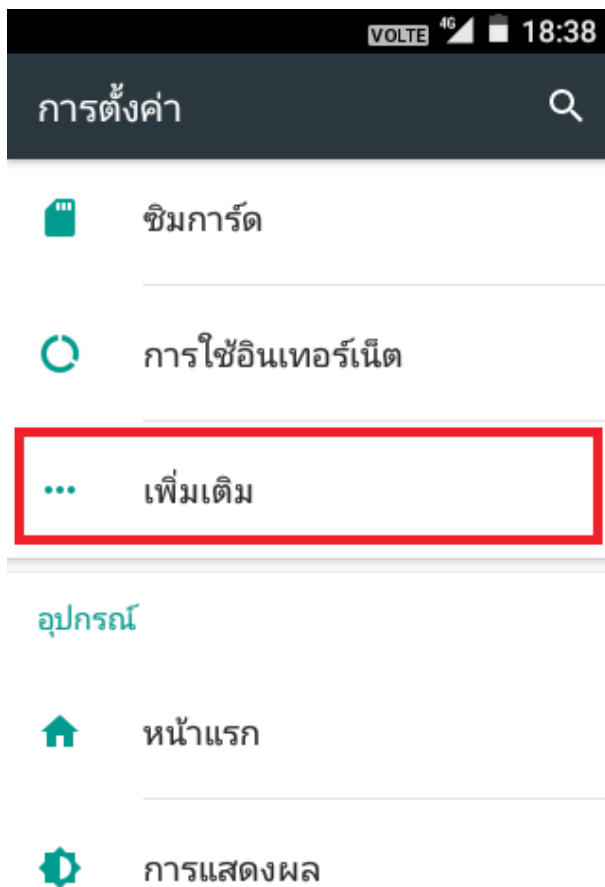


4. And then [Cellular network]

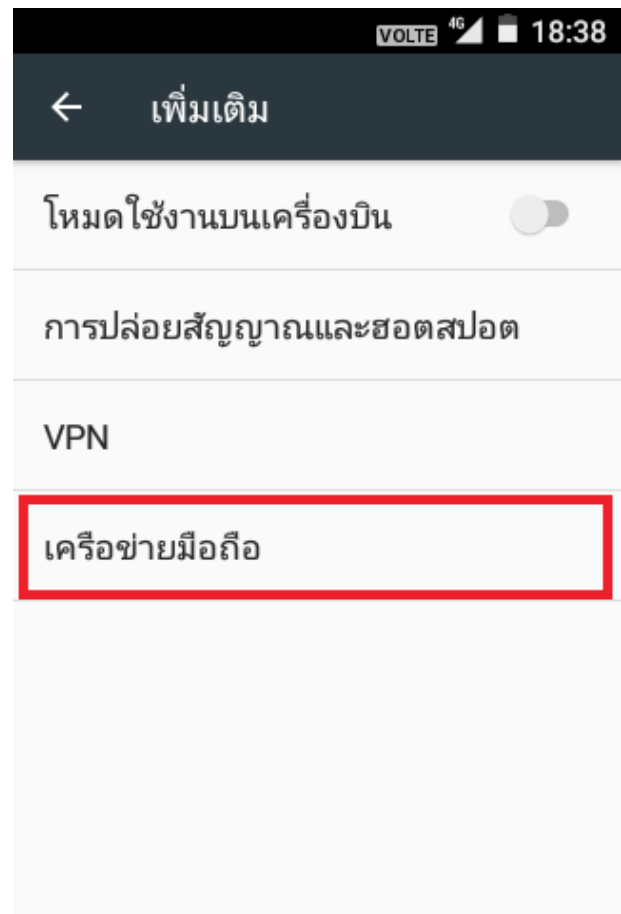


5. Select [Access point name]

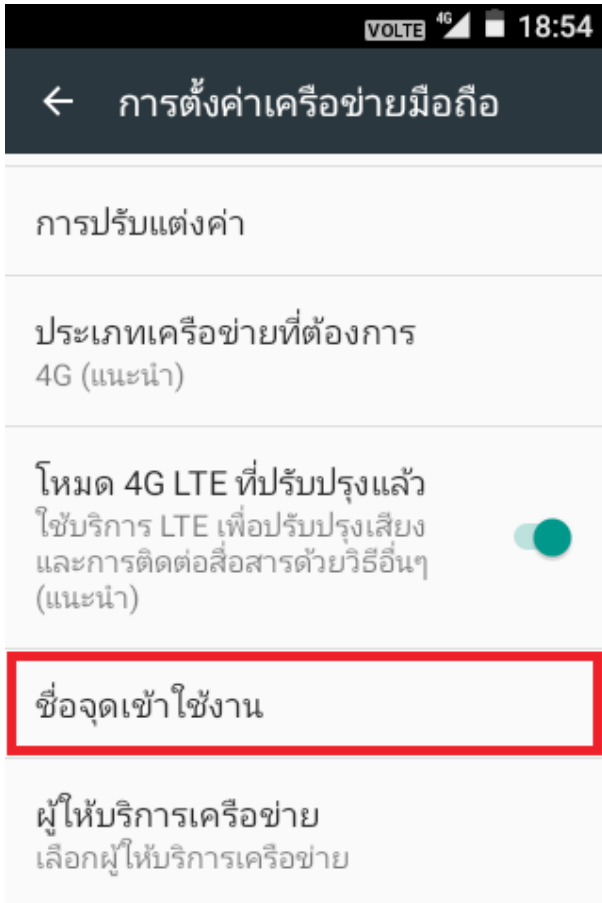


6. You'll find APN settings as per inserted SIM card, if no or unusable, you can reset it by pressing **Menu** button (3 dots sign)

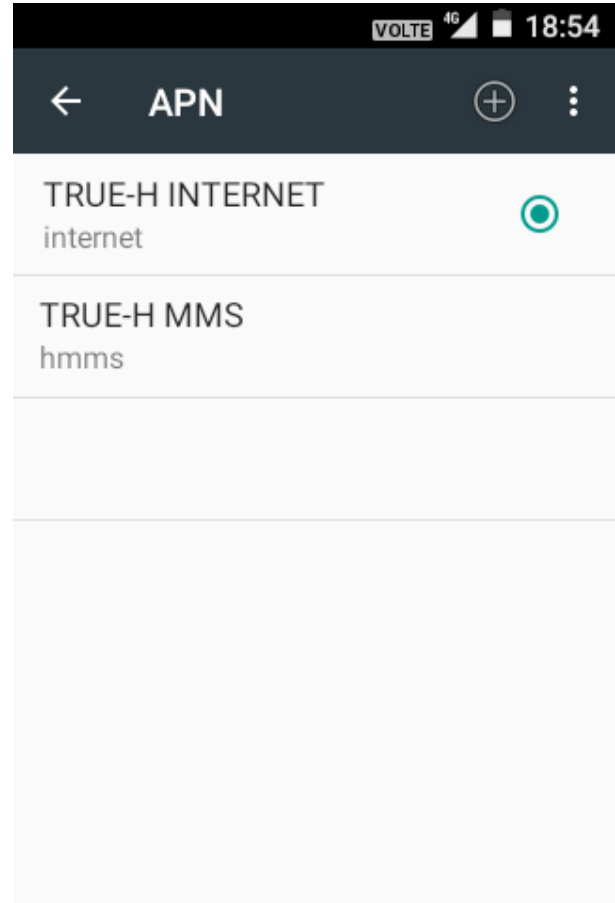

7. Select **[Reset to Default]**

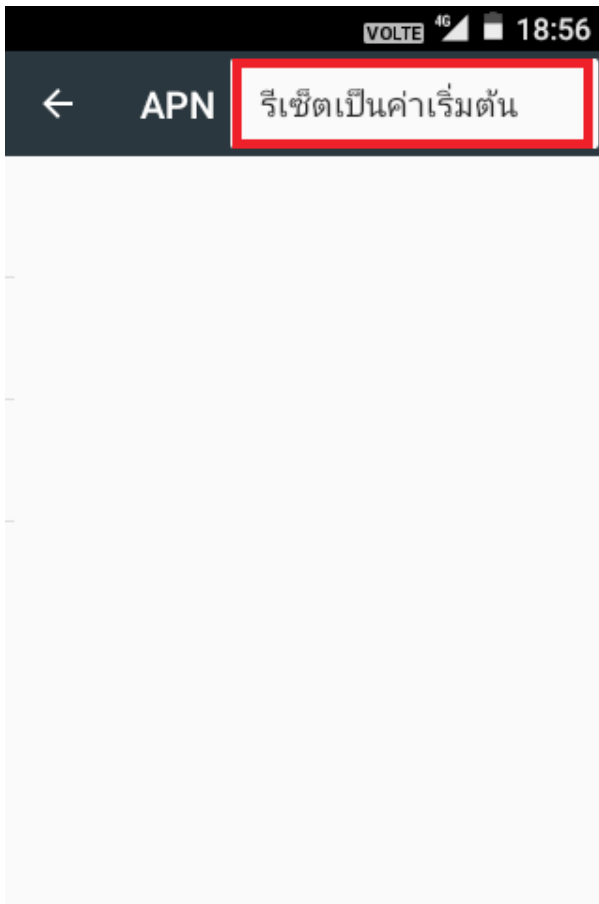


8. APN as per inserted SIM card
TRUE-H INTERNET
TRUE-H MMS

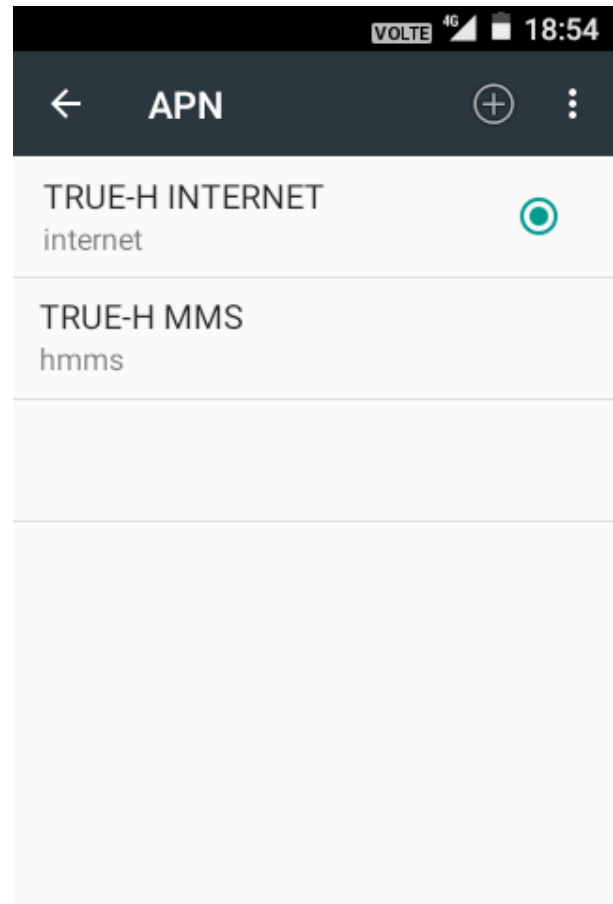

9. Manual APN setting at [Access point name], press **Plus sign (+)**

10. **TRUE-H INTERNET**


- [Name] : TRUE-H INTERNET
- [APN] : internet
- [APN Type] : default,supl
- [Username] : true
- [Password] : true
- MCC : 520
- MNC : 00 (Real Move) / 04 (Real Future)

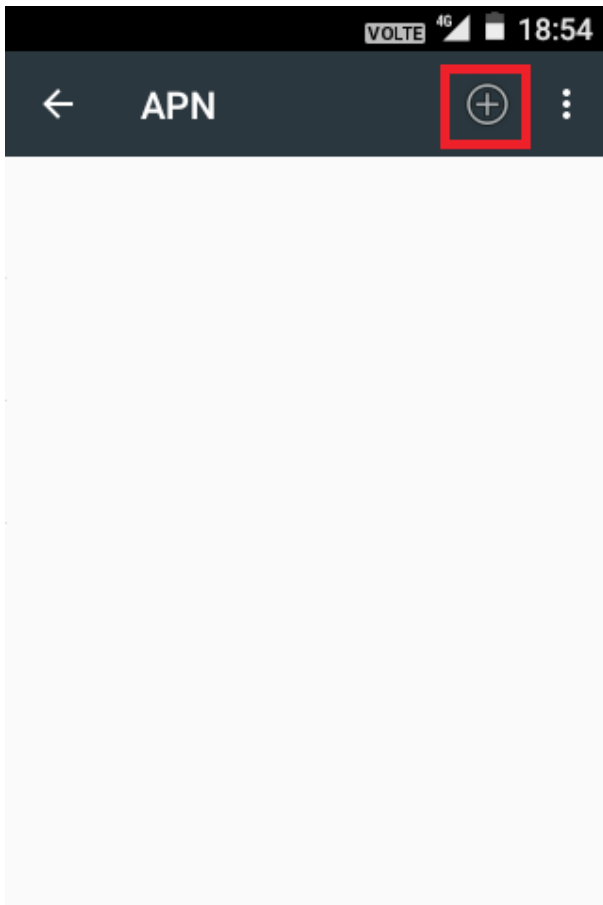

11. Once completed, press Menu button and then [Save]

11. **TRUE-H MMS**

- [Name] : TRUE-H MMS
- [APN] : hmms
- [APN Type] : mms
- [Username] : true
- [Password] : true
- MMSC :
http://mms.trueh.com:8002/
- [MMS Proxy] : 10.4.7.39
- [MMS Port] : 8080
- MCC : 520
- MNC : 00 (Real Move) / 04 (Real Future)

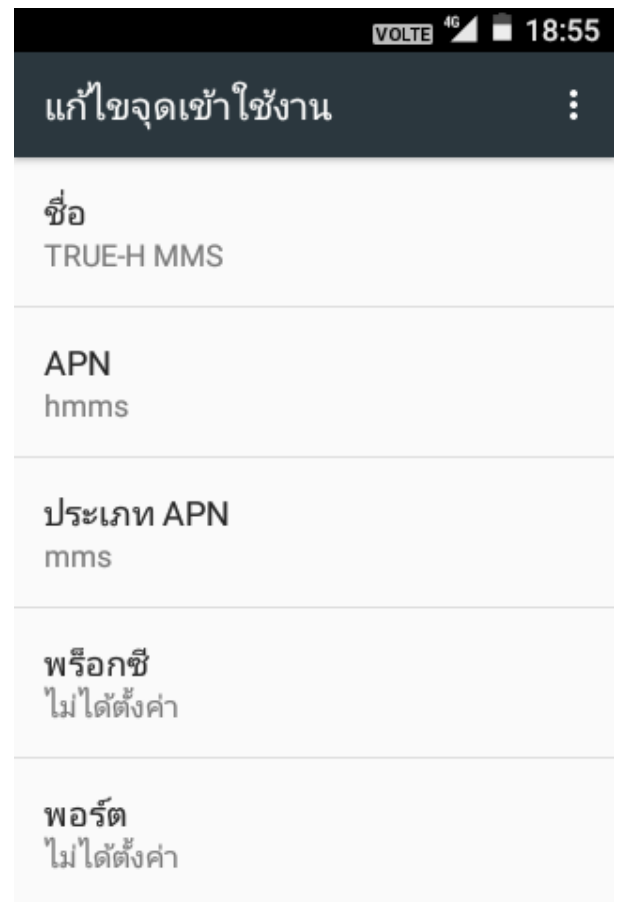

12. Once completed, press Menu button and then [Save]

