

How to set up APN (Manual) for True SMART 4G 5.0

1. Go to [Menu]



2. Select [Settings]



3. Go to [More...]



4. Select [Mobile networks]




5. Select [Access Point Names]



6. If [APN] is not found, press [menu] button as shown



7. Select [New APN]

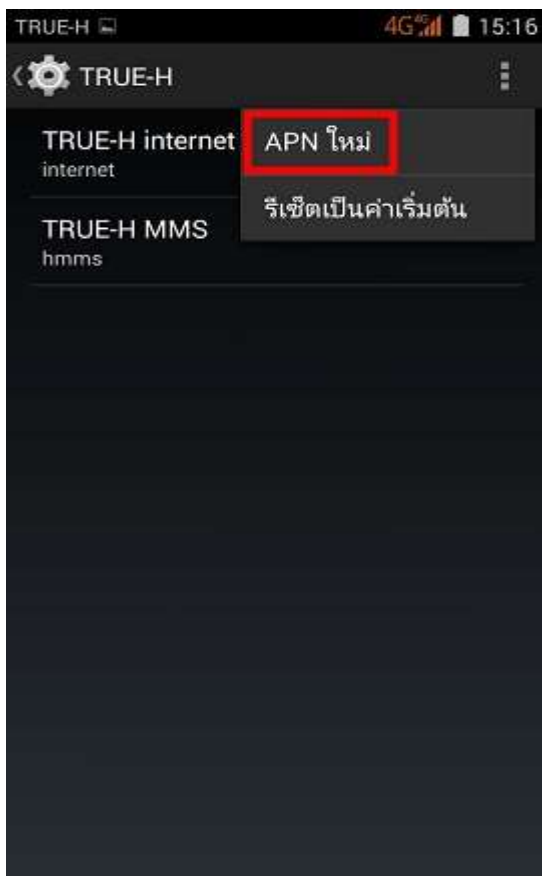

8. Set up TRUE-H internet as follows:

- Name: TRUE-H internet
- APN: internet
- APN type: default, supl
- Proxy: n/a
- Port: n/a
- Username: true
- Password: true
- Server: n/a
- MMSC: n/a



9. Continue from item 8


- MMS proxy: n/a
- MMS port: n/a
- MCC: n/a
- MNC: n/a
- Authentication type: PAP
- APN protocol: n/a
- APN roaming protocol: n/a




10. Press [menu] button as shown, and then press [Save]




11. To use TRUE-H internet APN, make it blue as shown

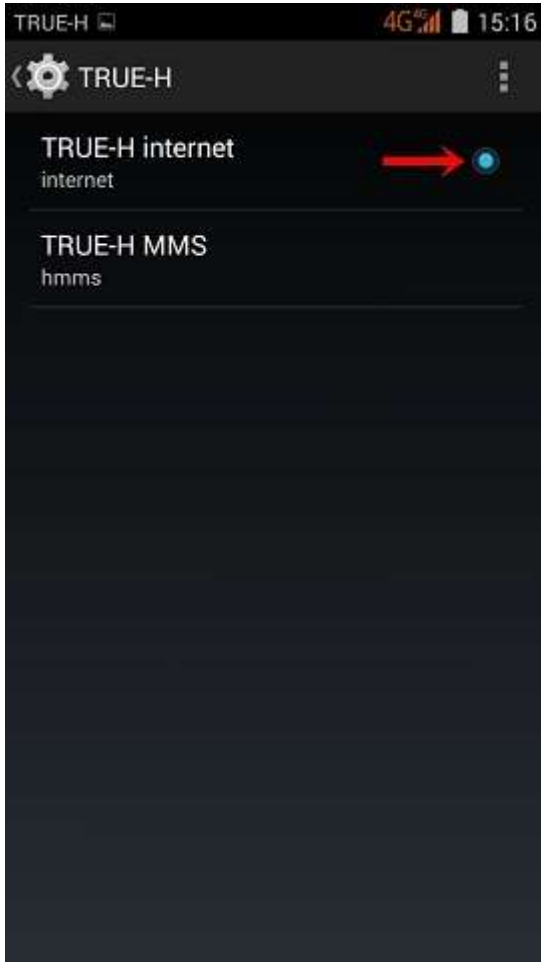

12. MMS APN setting, press [menu] button as shown

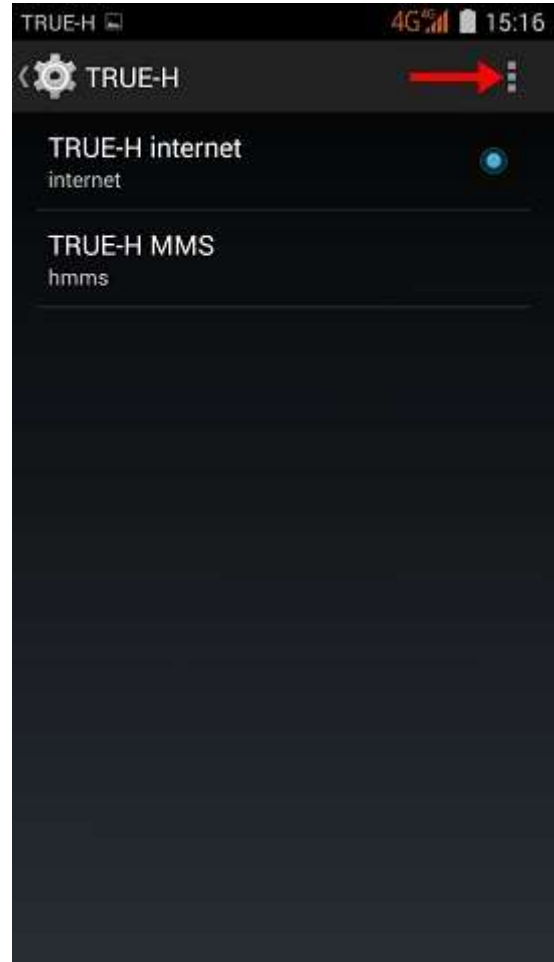

13. Select [New APN]

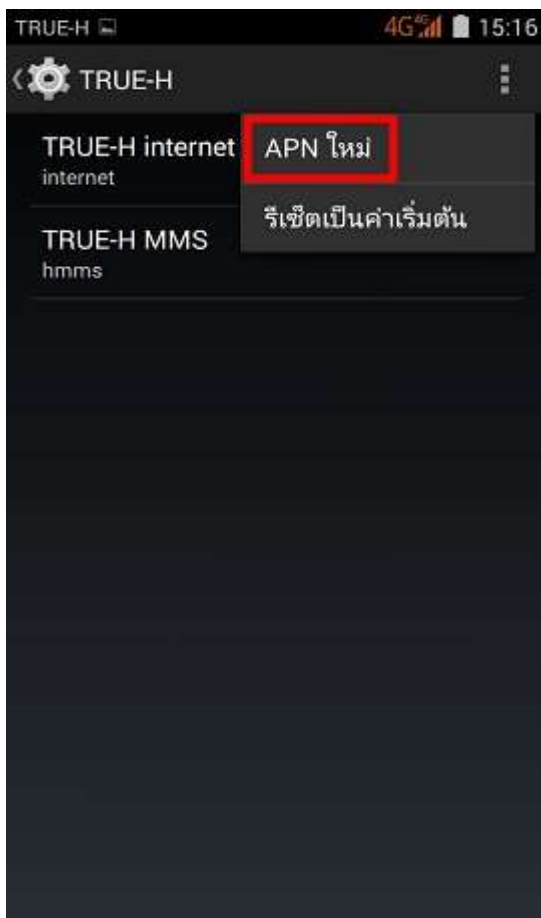

14. Set up TRUE-H MMS as follows:

- Name: TRUE-H MMS
- APN: hmms
- APN type: mms
- Proxy: n/a
- Port: n/a
- Username: true
- Password: true
- Server: n/a
- MMSC: n/a



15. Continue from item 14

- MMSC: <http://mms.trueh.com:8002/>
- MMS proxy: 10.4.7.39
- MMS port: 8080
- MCC: n/a
- MNC: n/a
- Authentication type: n/a
- APN protocol: n/a
- APN roaming protocol: n/a

16. Press [menu] button as shown, and then press [Save]

