



How to set up APN on TRUE BEYOND 4G


1. Select Settings

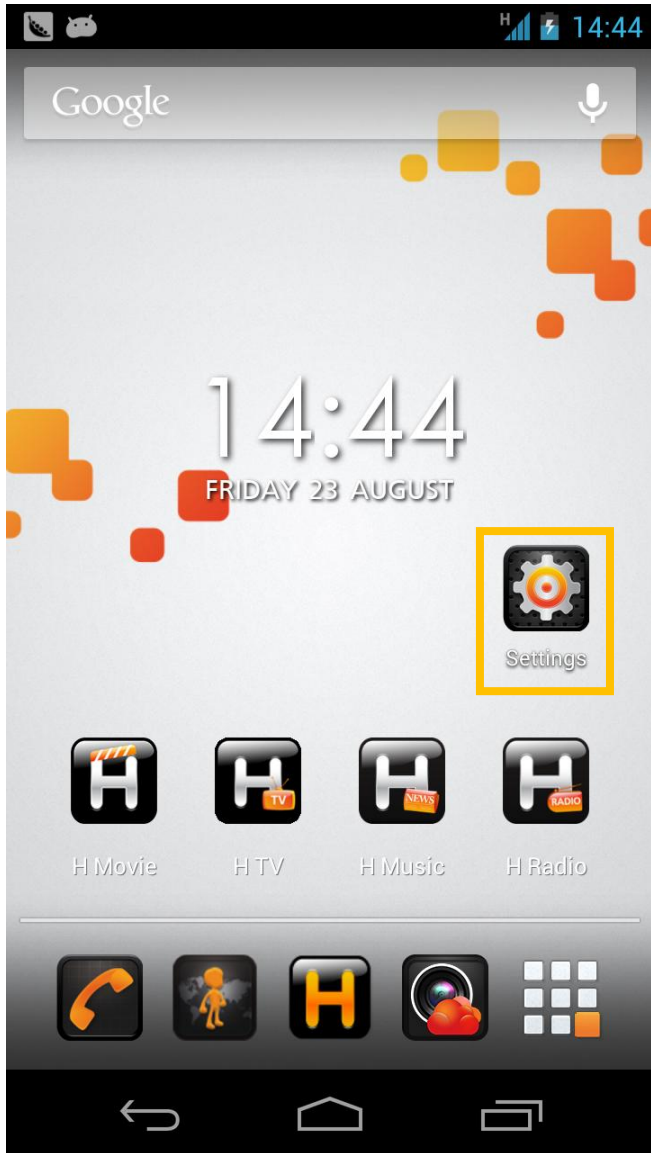


2. More

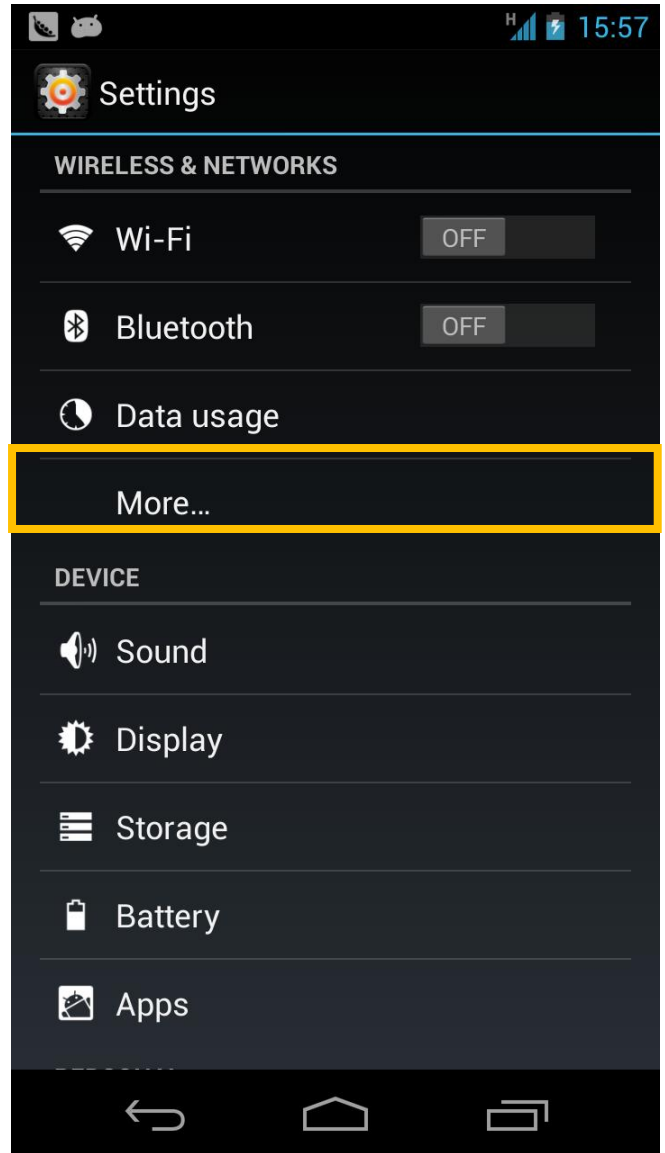

3. Select Mobile networks


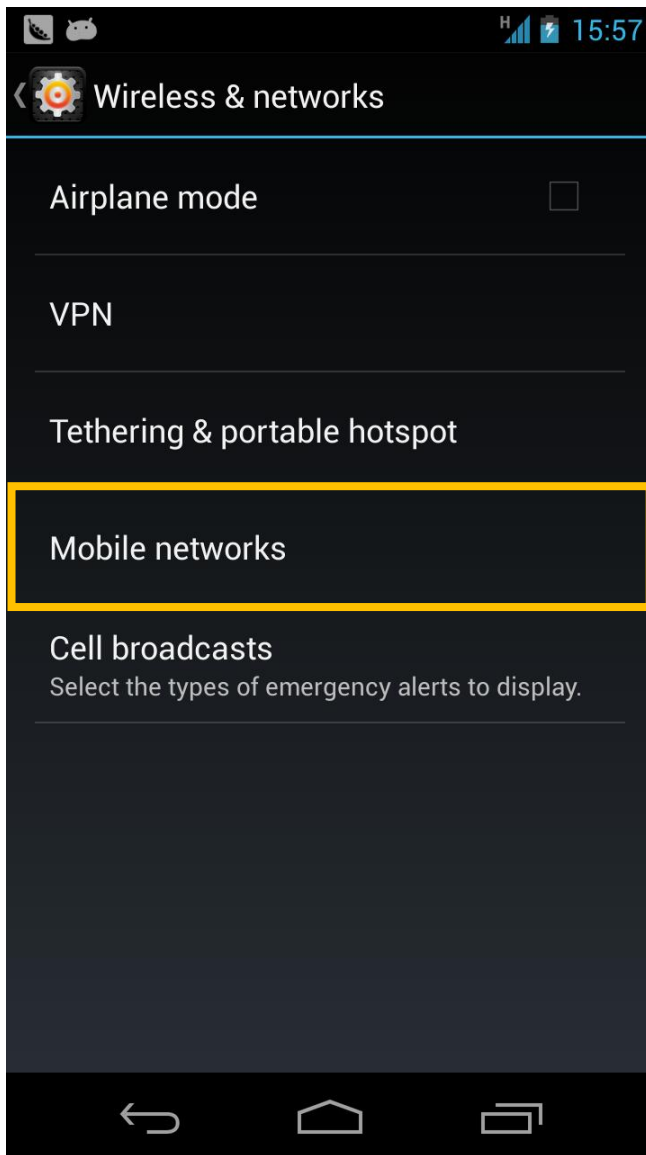


4. Select Access Point Names

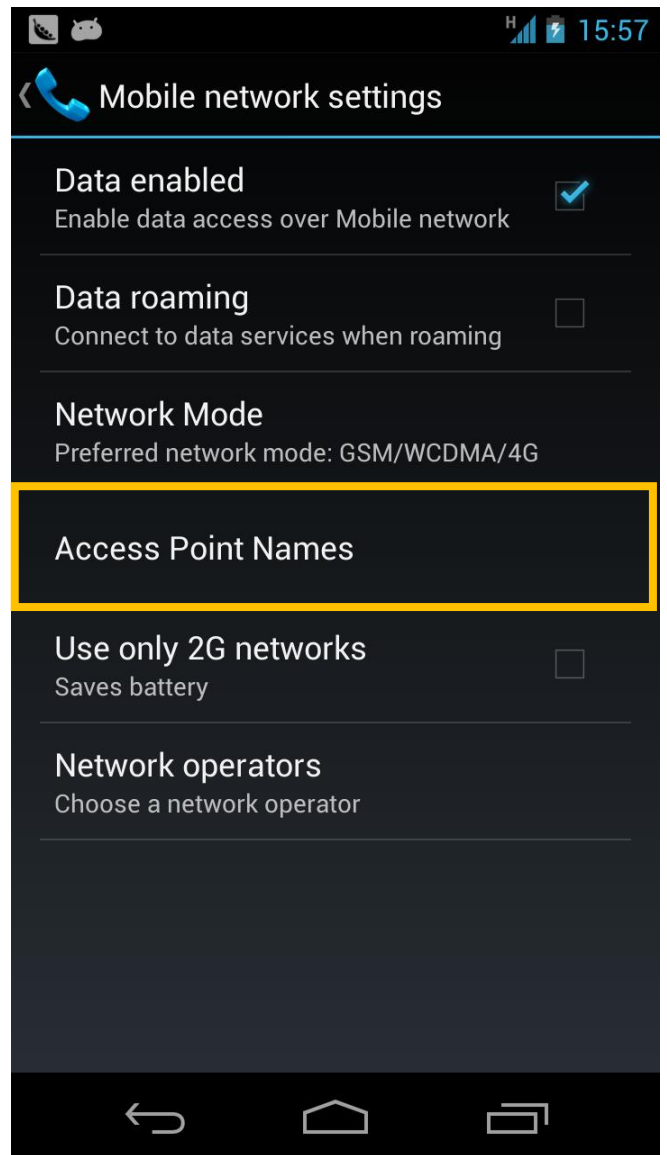

5. Usually the APN parameters are already set. If you cannot find the APN parameters for Internet and MMS, click Menu as indicated by the arrow

6. Select New APN

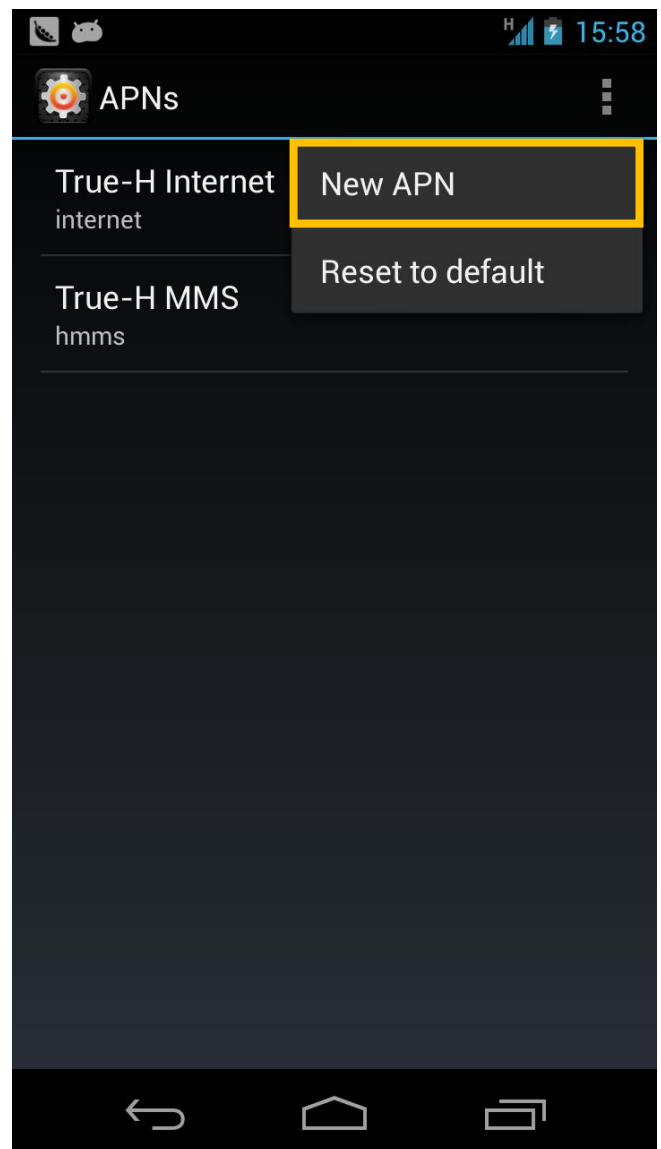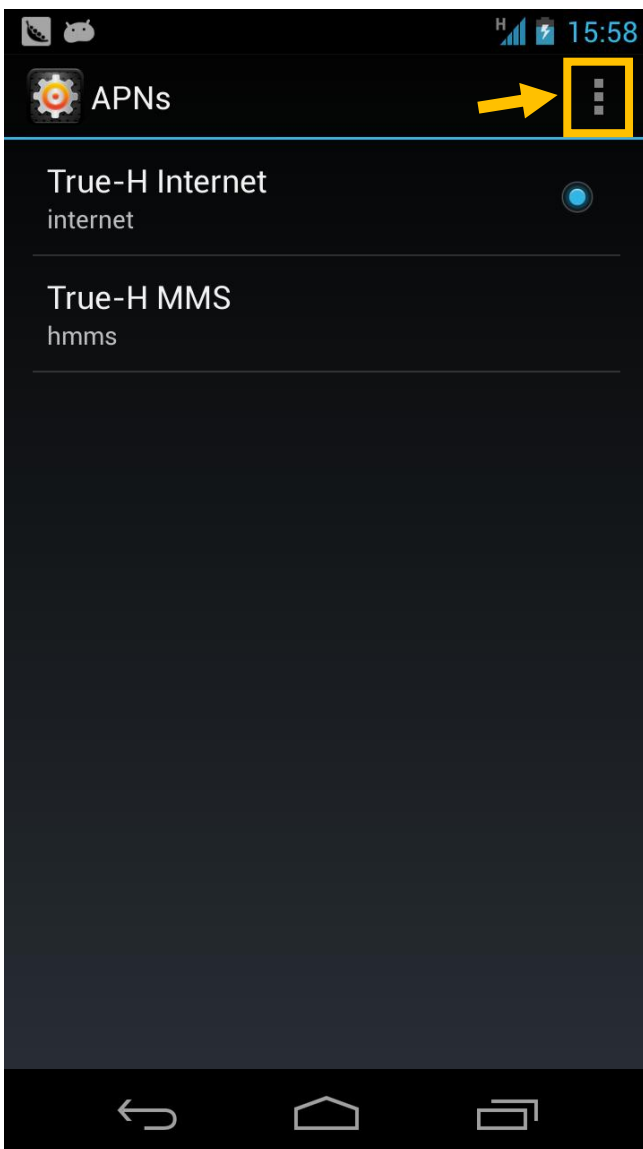

16:07

Edit access point **APN Internet**

Name
True-H Internet

APN
internet

Proxy
Not set

Port
Not set

Username
true

Password
true

Server
*

MMSC
Not set

MMS proxy
Not set

MMS port
Not set

MCC
520

MNC
00

Authentication type
None

APN type
default, hipri

APN protocol
IPv4

APN roaming protocol
IPv4

APN enable/disable
APN enabled

Bearer
Unspecified

16:09

Edit access point **APN MMS**

Name
True-H MMS

APN
hmms

Proxy
Not set

Port
Not set

Username
true

Password
true

Server
*

MMSC
http://mms.trueh.com:8002/

MMS proxy
010.004.007.039

MMS port
8080

MCC
520

MNC
00

Authentication type
None

APN type
mms

APN protocol
IPv4

APN roaming protocol
IPv4

APN enable/disable
APN enabled

Bearer
Unspecified