


APN Settings for True Super 4


1. On Home screen, select **[Menu]**



2. Select **[Settings]**

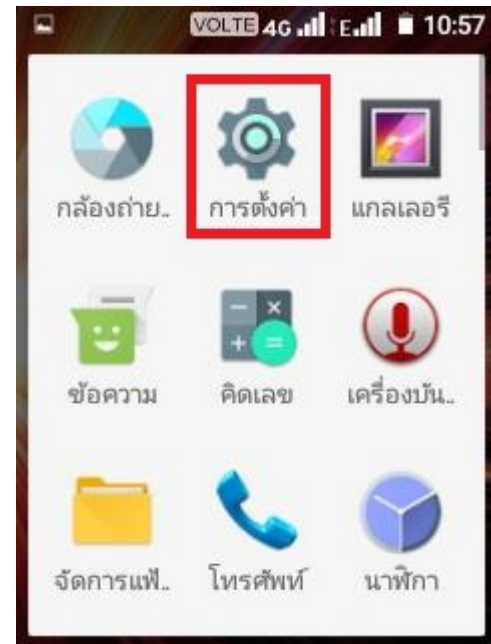


3. Select **[More]**

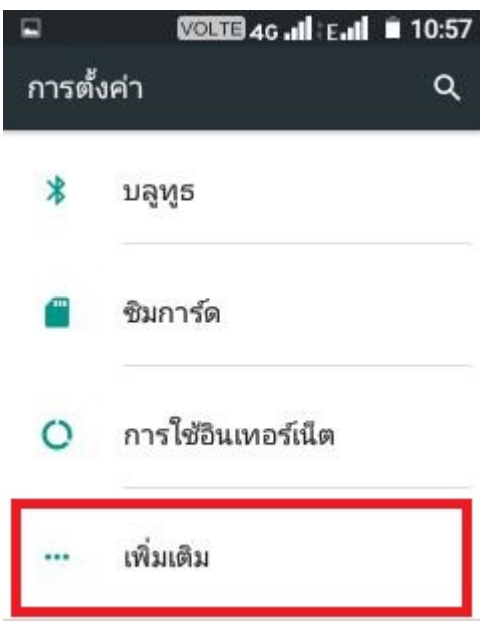


4. And then **[Mobile network]**




5. Select **[Access point name]**

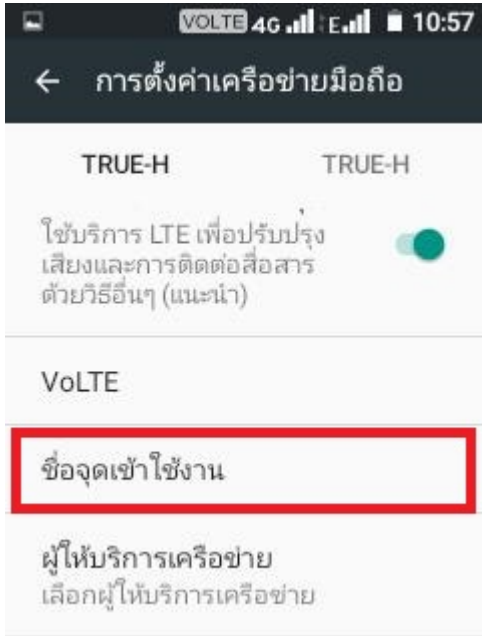

6. APN as per inserted SIM card, if unusable, you can reset it by pressing **Menu** button (3 dots sign))

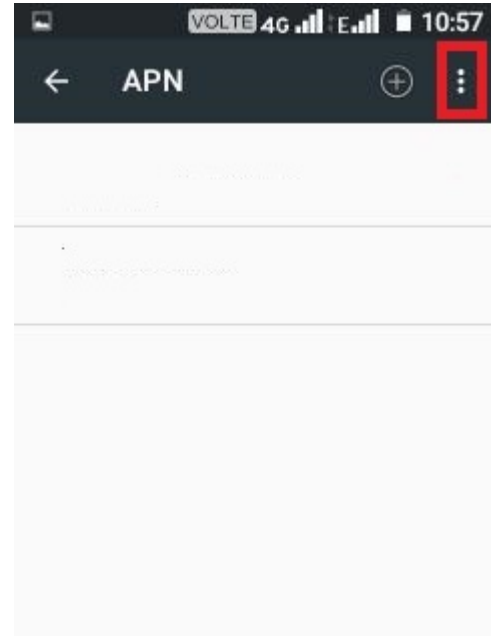


7. Select **[Reset to Default]**

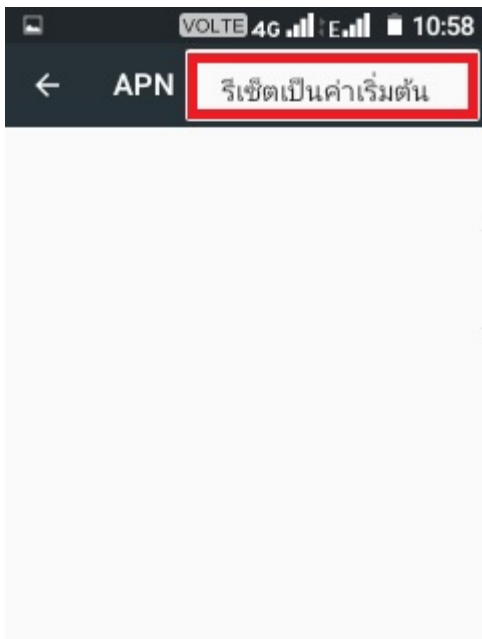


8. APN settings as follows:

- TRUE-H INTERNET
- TRUE-H MMS

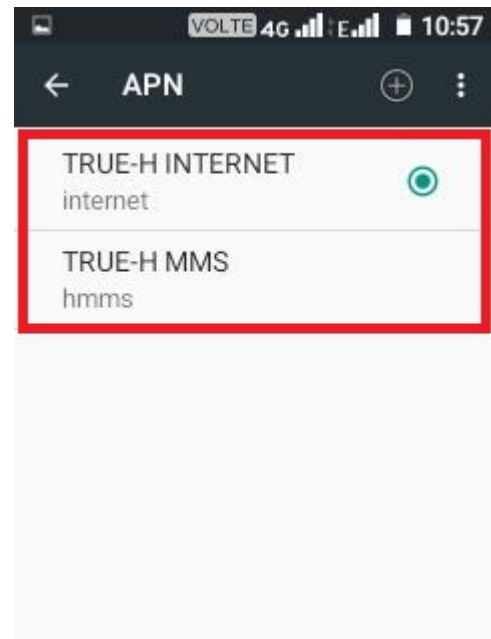

9. Manual APN, press **plus sign (+)**

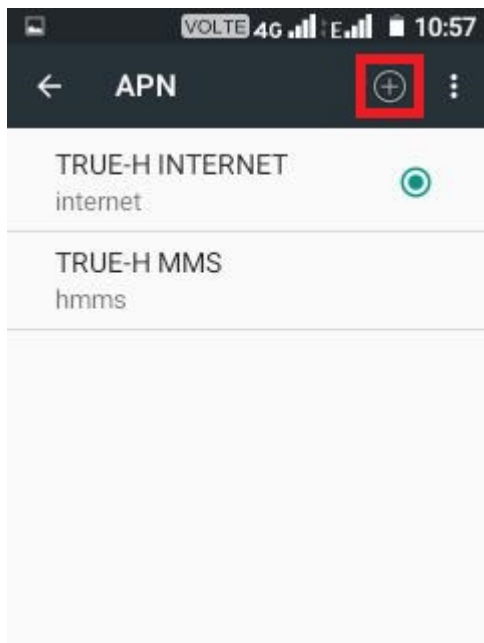

10. **TRUE-H INTERNET**


- [Name] : TRUE-H INTERNET
- [APN] : internet
- [Username] : true
- [Password] : true
- [Server] : http://m.truelife.com
- MCC : 520
- MNC : 00



11. Press **Menu** (3 dots sign) then press **[Save]**

12. TRUE-H MMS

- [Name] : TRUE-H MMS
- [APN] : hmms
- [Username] : true
- [Password] : true
- [Server] :
http://mms.trueh.com/8002/
- [Proxy] : 10.4.7.39
- [Port] : 8080
- MCC : 520
- [APN Type] : mms

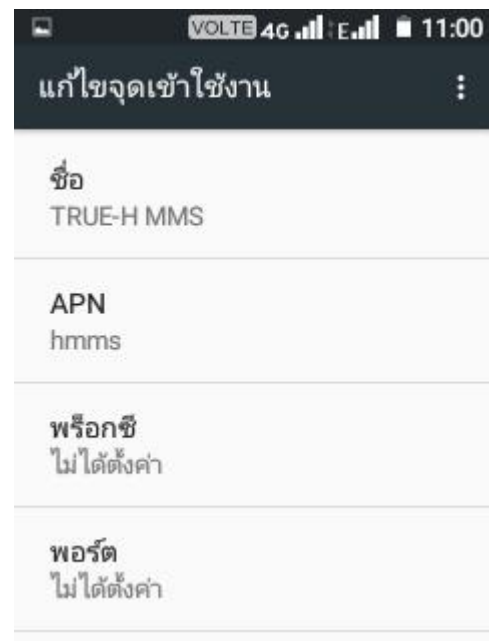

11. Press **Menu** (3 dots sign) then press **[Save]**

