


Internet and MMS APN Settings for True SMART MAX 4.0

1. At Home screen, go to (Settings) 2. Select (More)




3. Select (Cellular networks)

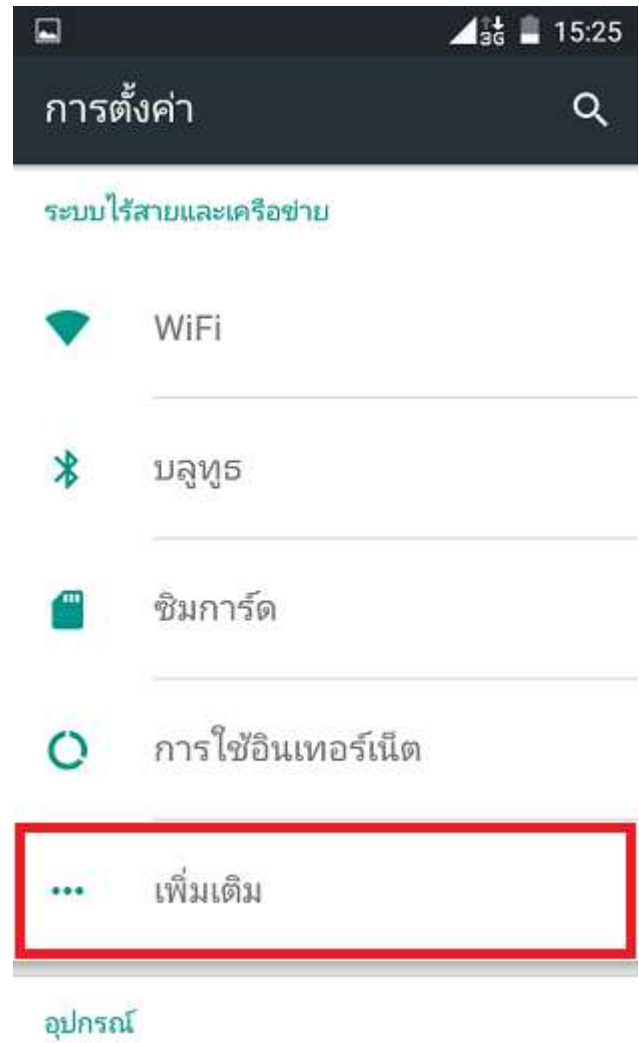

4. And then (Access Point Names)



5. You'll find APN as per inserted SIM Card

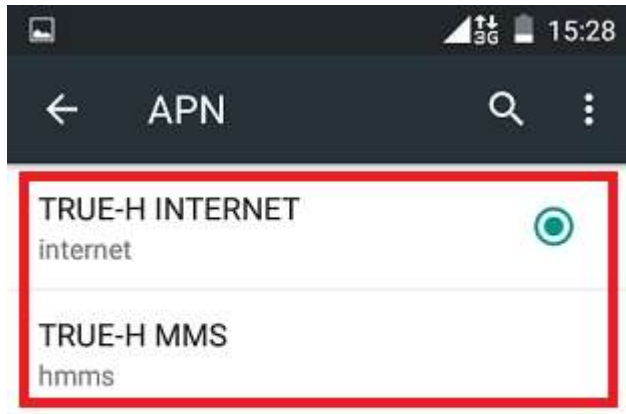

6. If APN is not found, press Menu button and select (New APN)



7. Set up APN: TRUE-H INTERNET 8. Once completed, press Menu button and select (Save) as follows:

- (Name): TRUE-H INTERNET
- (APN): internet
- (Username): true
- (Password): true
- MCC: 520
- MNC: 00 (for Real Move), and 04 (for Real Future)
- (APN Type): default,supl

button and select (Save)



9. Set up APN : TRUE-H MMS as follows:

10. Once completed, press Menu button and select (Save)

- (Name): TRUE-H MMS
- (APN): hmms
- (Username): true
- (Password): true
- MMSC: <http://mms.trueh.com:8002>
- (MMS Proxy): 010.004.007.039
- (MMS Port): 8080
- MCC: 520
- MNC: 00 (for Real Move)
, and 04 (for Real Future)

