



Set up APN on Samsung Galaxy J7 Pro


1. On main screen, swipe screen up

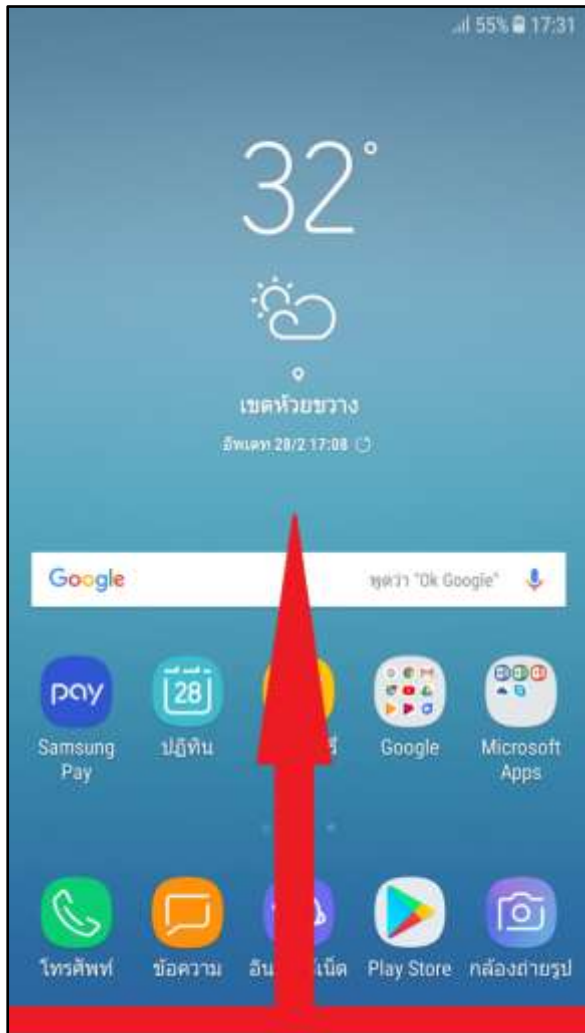

2. Select (Settings)

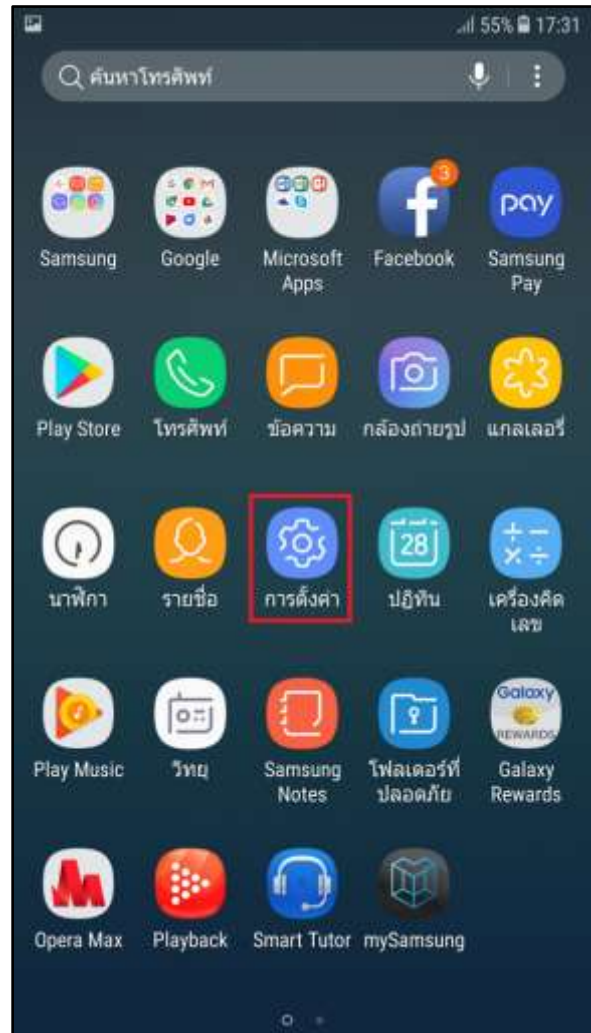


3. And then (Connections)

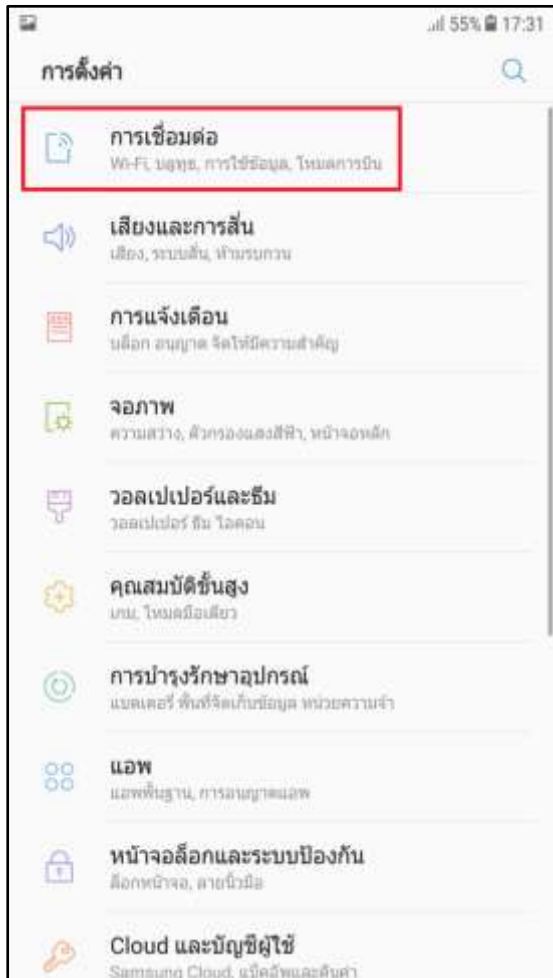

4. Select (Mobile networks)



5. Choose (Access Point Names)

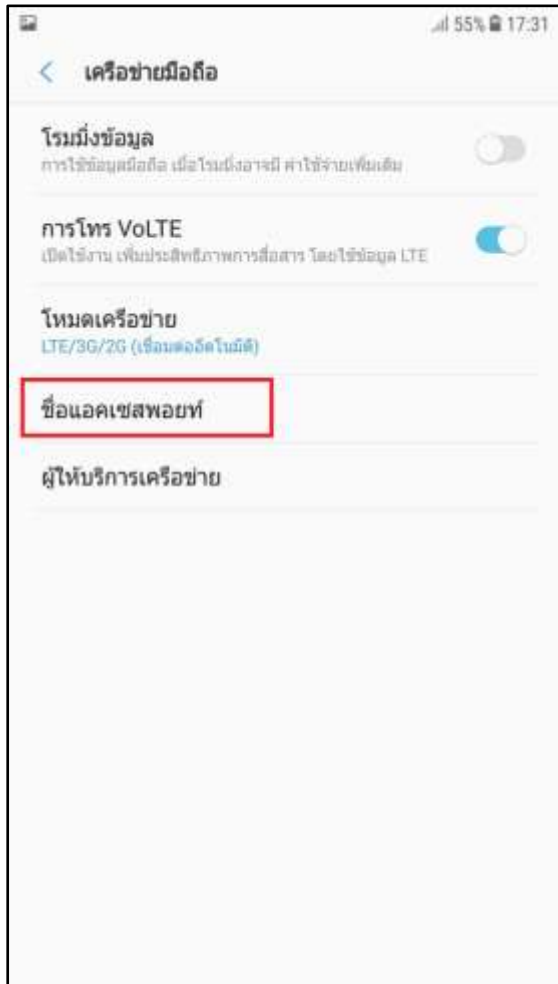

6. If find nothing, you can set up APN automatically, tap Menu button




7. Press (Reset to default)




8. (Reset APN settings?), press (RESET)



9. Restore Default APN...

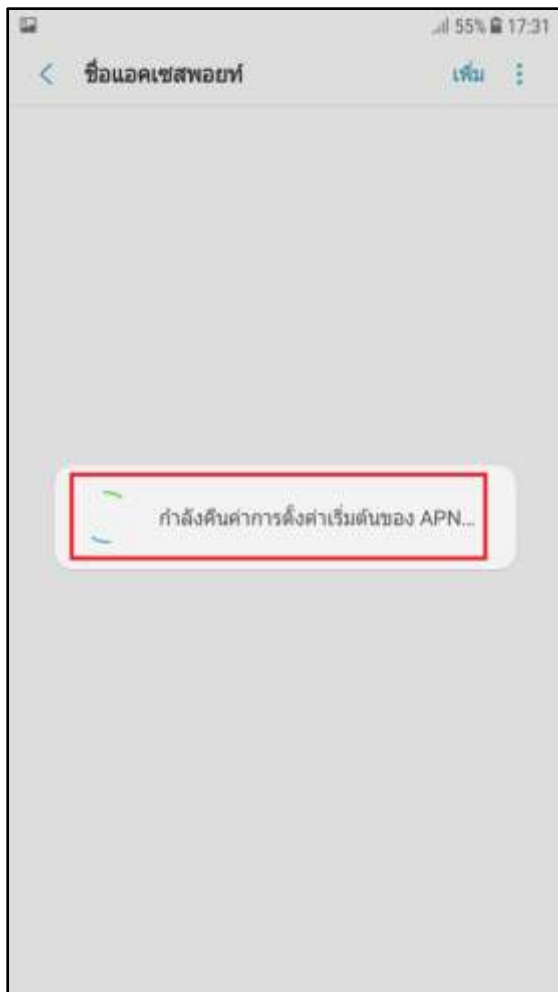

10. APN settings reset to default and there are 3 APNs : INTERNET, MMS, IMS

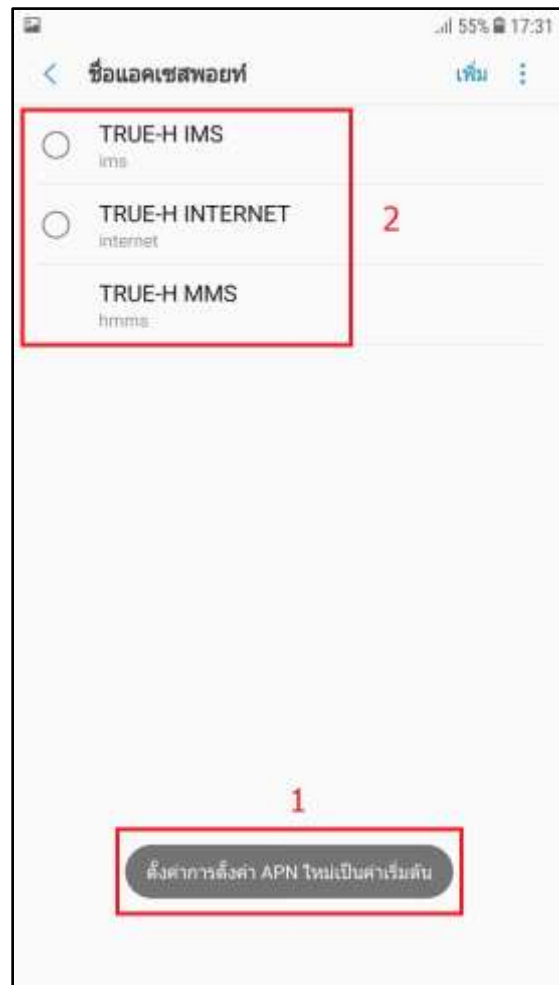

11. Tap a circle in front of **TRUE-H INTERNET** to choose it as Internet APN



12. Manual Setup : at (Access Point Names) page, press **(ADD)**



13. EDIT ACCESS POINT

71% 18:21

< แก้ไขแอคเซสพอยท์

ชื่อ
ไม่กำหนด

APN
ไม่กำหนด

พรีเอกซี
ไม่กำหนด

พอร์ต
ไม่กำหนด

ชื่อผู้ใช้
ไม่กำหนด

รหัสผ่าน
ไม่กำหนด

เซิร์ฟเวอร์
ไม่กำหนด

MMSC
ไม่กำหนด

MMS พรีเอกซี
ไม่กำหนด

72% 18:23

< แก้ไขแอคเซสพอยท์

พอร์ต MMS
ไม่กำหนด

MCC
520

MNC
00

ประเภทการยืนยัน
PAP

ชนิด APN
default,supl

โปรโตคอล APN
IPv4/IPv6

โปรโตคอลการโรมมิ่ง APN
IPv4

เปิดใช้งาน/ปิดใช้งาน APN
เปิดใช้งาน APN

การติดต่อ
ไม่ระบุ

ประเภทผู้ให้บริการเครือข่ายเสมือนจริงบนมือถือ
ไม่มี

14. Set up INTERNET

- Name = TRUE-H INTERNET
- APN = internet
- Username = true
- Password = true
- Authentication type = PAP
- APN type = default,supl
- APN protocol = IPv4/iIPv6

15. Once completed, tap (Save)



16. TRUE-H MMS

- Name = TRUE-H MMS
- APN = hmms
- Username = true
- Password = true
- MMSC = http://mms.trueh.com:8002/
- Multimedia message proxy = 010.004.007.039
- Multimedia message port = 8080
- Authentication type = PAP
- APN type = mms
- APN protocol = IPv4

17. Once completed, tap (Save)

18. Set up TRUE-H IMS

- Name = TRUE-H IMS
- APN = ims
- Authentication type = PAP
- APN type = ims
- APN protocol = IPv4/IPv6



19. Once completed, tap (Save)



20. When finished, 3 APNs will appear at ACCESS POINT NAMES

