



1.เลือก **Settings: การตั้งค่า**

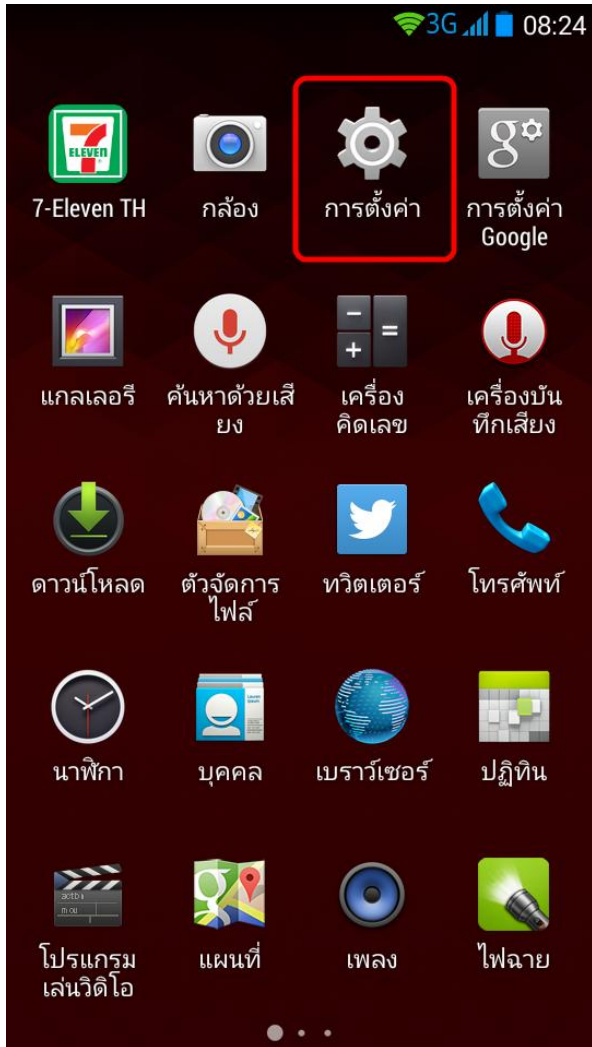

2. **More... : เพิ่มเติม...**

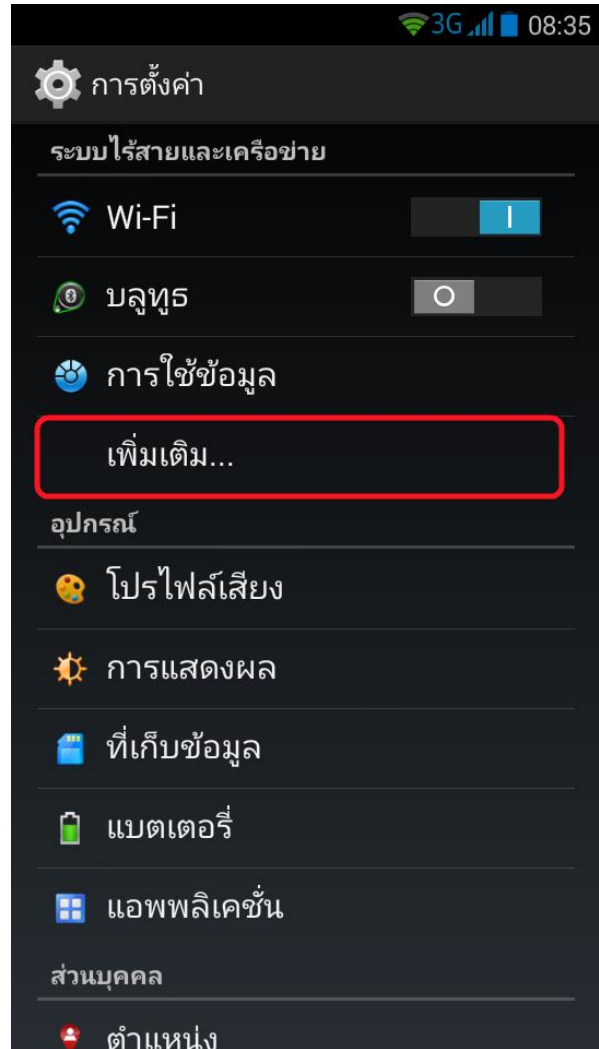


3.เลือก **Mobile networks** : **เครือข่ายมือถือ**




4. เลือก **Access Point Names** : **ชื่อจุดเข้าใช้งาน**


*สำหรับ True Smart 3.5 ต้องทำการเลือก SIM ก่อน

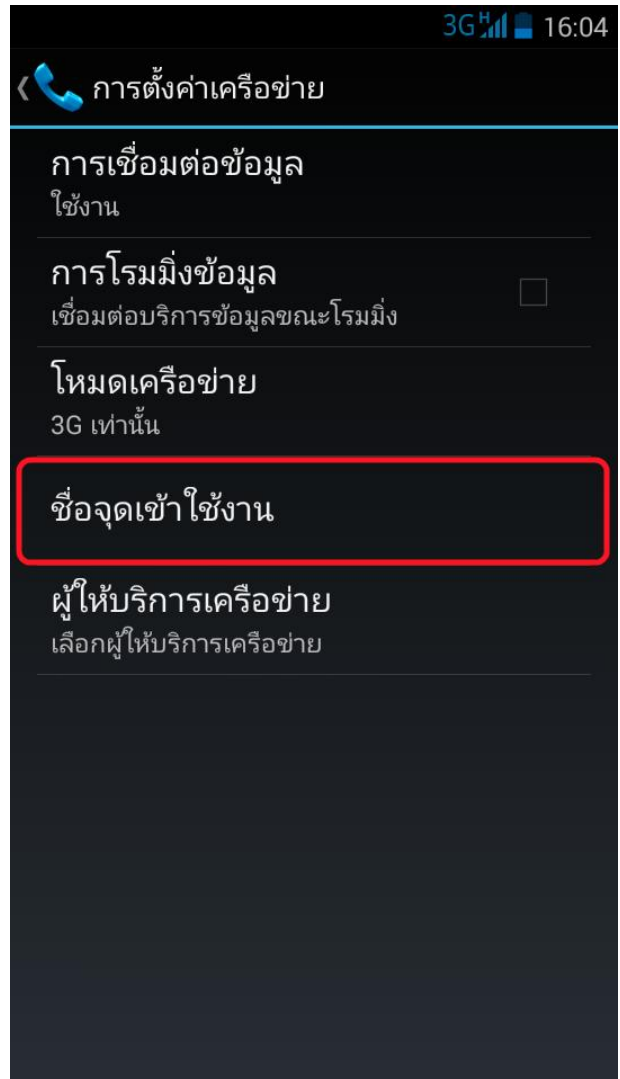

5. กรณีไม่พบ APN ให้เลือก **New APN** : **APN ใหม่** เลือก **ตั้งค่า APNs Internet** และ **MMS** ดังภาพด้านล่าง

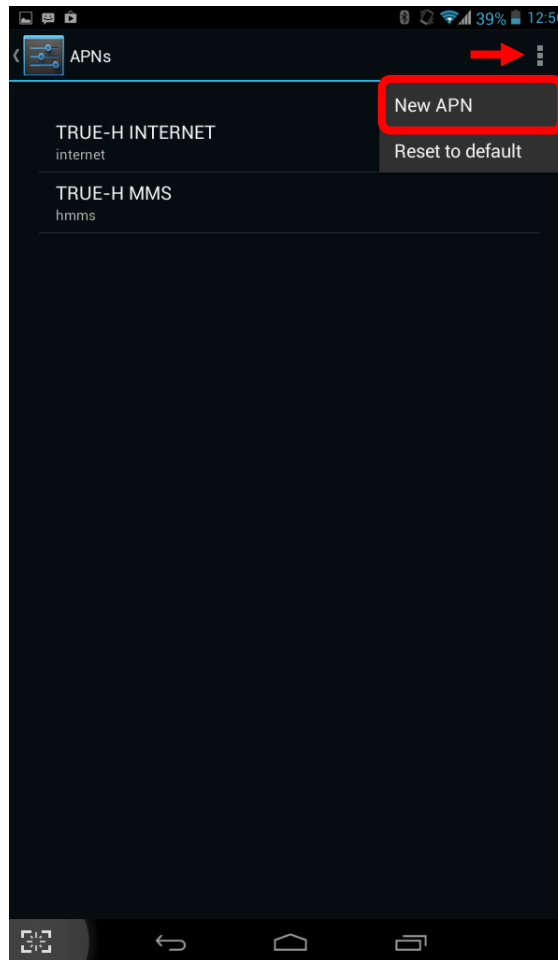

*สำหรับ True Smart 3.5 กรณีไม่พบ APN ดังภาพ ให้เลือกที่เครื่องหมาย บวก เพื่อเพิ่ม ค่า APN

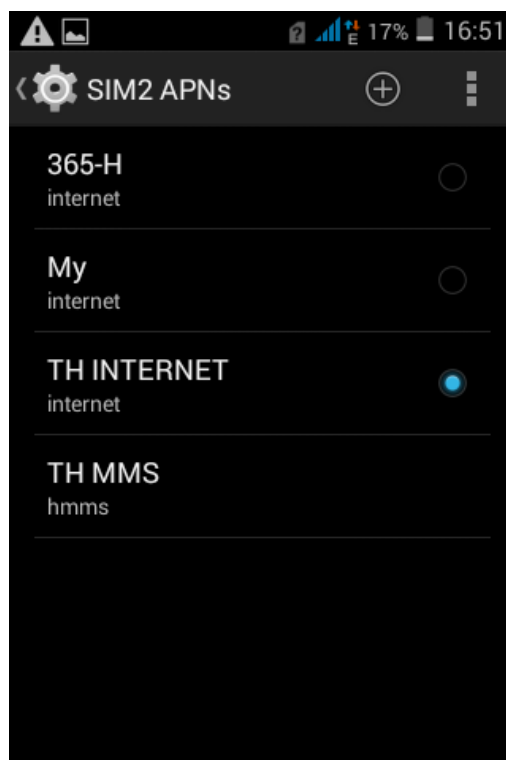

1:24 PM

Edit access point **APN Internet**

Name
TRUE-H INTERNET

APN
internet

APN type
default,supl,net

Proxy
Not set

Port
Not set

Username
true

Password
true

Server
Not set

MMSC
Not set

MMS proxy
Not set

MMS port
Not set

MCC
520

MNC
00

Authentication type
Not set

APN protocol
IPv4

APN enable/disable
APN enabled

Bearer
Unspecified

1:25 PM

Edit access point **APN MMS**

Name
TRUE-H MMS

APN
hmms

APN type
mms

Proxy
Not set

Port
Not set

Username
true

Password
true

Server
Not set

MMSC
http://mms.trueh.com:8002/

MMS proxy
010.004.007.039

MMS port
8080

MCC
520

MNC
00

Authentication type
Not set

APN protocol
IPv4

APN enable/disable
APN enabled

Bearer
Unspecified